



ET-7019Z
PET-7019Z

ET-7219Z
PET-7219Z

thernet I/O Module with Universal 10-ch AI, 6/3-ch DO

Features

- Built-in Web Server
- Web HMI
- Support for both Modbus TCP and Modbus UDP Protocols
- Communication Access Control
- 2-port Ethernet Switch (LAN bypass) for Daisy-chain Wiring
- Dual Watchdog
- I/O Pair Connection
- Built-in I/O
  - ☐ Thermocouple/Voltage/Current Input: 10 Channels
  - ☐ DO: 6/3 Channels

Introduction

The ET-7019Z, PET-7019Z, ET-7219Z, and PET-7219Z modules are designed for high-precision thermocouple measurement. Each input channel provides automatic cold-junction compensation to ensure consistent and stable temperature readings in the field. The modules include open thermocouple detection as well as EMS (EFT/ESD/Surge) protection. In addition to supporting multiple thermocouple input types, every input channel can also be individually configured for current or voltage input, delivering optimal flexibility for a wide range of application requirements. This series also offers digital output channels, each equipped with short-circuit and overload protection.

System Specifications

Model	ET-7019Z	PET-7019Z	ET-7219Z	PET-7219Z
Software				
Built-in Web Server	Yes			
CPU Module				
Watchdog Timer	Module, Communication (Programmable)			
2-Way Isolation				
Ethernet	1500 VDC	-	1500 VDC	-
I/O	2500 VDC			
EMS Protection				
EFT (IEC 61000-4-4)	±4 kV for Power Line		±2 kV for Power Line	
ESD (IEC 61000-4-2)	±4 kV Contact for Each Terminal ±8 kV Air for Random Point			
Surge (IEC 61000-4-5)	±0.5 kV for Power Line		±2 kV for Power Line	
LED Indicators				
Status	Run, Ethernet	Run, Ethernet, PoE	Run, Ethernet, I/O	Run, Ethernet, I/O, PoE
Ethernet				
Ports	1 x RJ-45, 10/100 Base-TX		2 x RJ-45, 10/100 Base-TX, Swtich Ports	
PoE	-	Yes	-	Yes
LAN bypass	-		Yes	
Access Control	ID, Password and IP Filter			
Protocol	Modbus TCP, Modbus UDP			
Power				
Reverse Polarity Protection	Yes			
Consumption	2.6 W (max.)	2.9 W (max.)	3.4 W (max.)	3.6 W (max.)
Powered from PoE	-	IEEE 802.3af, Class1	-	IEEE 802.3af, Class1
Powered from Terminal Block	+10 ~ +30 VDC	+12 ~ +48 VDC		
Mechanical				
Dimensions (mm)	72 x 123 x 35 (W x L x H)		76 x 120 x 42 (W x L x H)	
Installation	DIN-Rail Mounting			
Environment				
Operating Temperature	-25 ~ +75 °C			
Storage Temperature	-30 ~ +80 °C			
Humidity	10 ~ 90% RH, Non-condensing			


LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

I/O Specifications


Model	ET-7019Z	PET-7019Z	ET-7219Z	PET-7219Z
Thermocouple Input				
Channels	10 (Differential)			
Type	Thermocouple, Voltage, Current			
Stable and Consistent Temperature Output	Yes			
Range	Thermocouple (J, K, T, E, R, S, B, N, C, L, M, and $L_{DIN43710}$) ±15 mV, ±50 mV, ±100 mV, ±150 mV, ±500 mV, ±1 V, ±2.5 V, ±5 V, ±10 V, ±20 mA, 0 ~ 20 mA, 4 ~ 20 mA (Jumper Selectable)			
Resolution	16-bit			
Accuracy	±0.1% of FSR or better			
Sampling Rate	10 Hz (total channels)			
Input Impedance	>300 kΩ			
Over Voltage Protection	240 V_{rms}			
Individual Channel Configuration	Yes			
Open Wire Detection	Yes			
Virtual Channel to Channel Isolation	±400 VDC			
Digital Output				
Channels	6		3	
Type	Isolated Open Collector			
Sink/Source (NPN/PNP)	Sink			
Load Voltage	+5 ~ +50 VDC			
Load Current	700 mA/channel		650 mA/channel	
Overvoltage Protection	+60 VDC			
Overload Protection	1.4 A			
Short-circuit Protection	Yes			
Power on Value	Programmable			
Safe Value	Programmable			

Wire Connections


Thermocouple Input (Default)





Voltage Input (Default)



Current Input




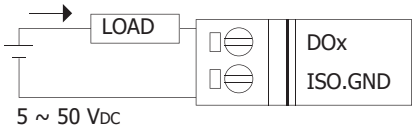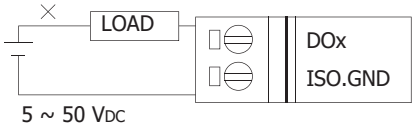Digital Output	ON State Readback as 1	OFF State Readback as 0
Open Collector (Sink)		


LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Pin Assignments


DB-1820

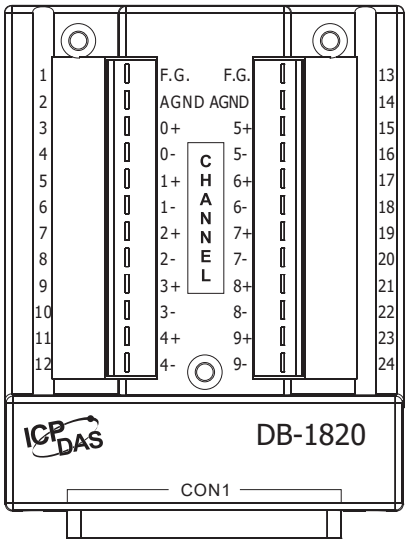


DN-1822

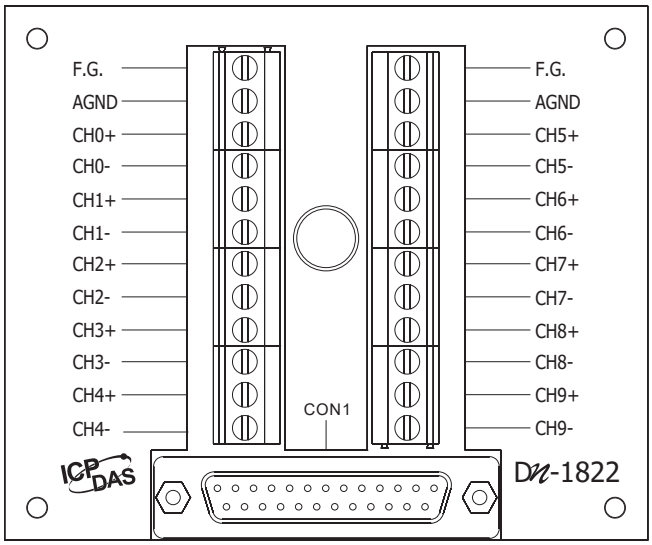


DN-1823

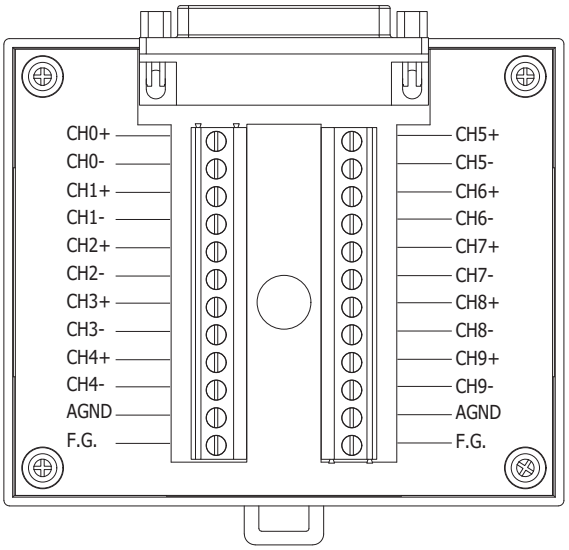

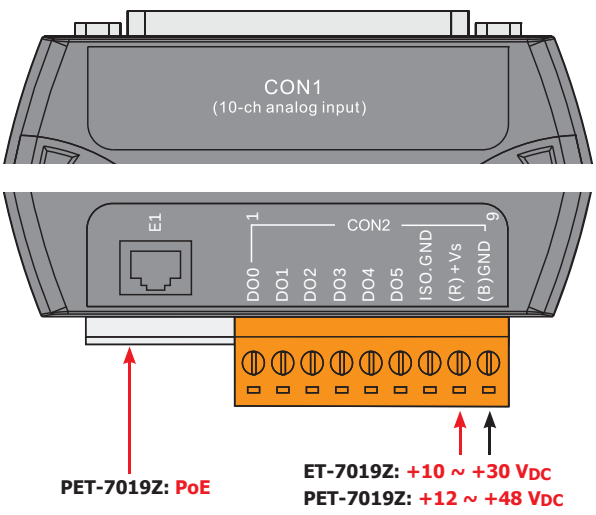

PET-7019Z: PoE

ET-7019Z: +10 ~ +30 VDC
PET-7019Z: +12 ~ +48 VDC

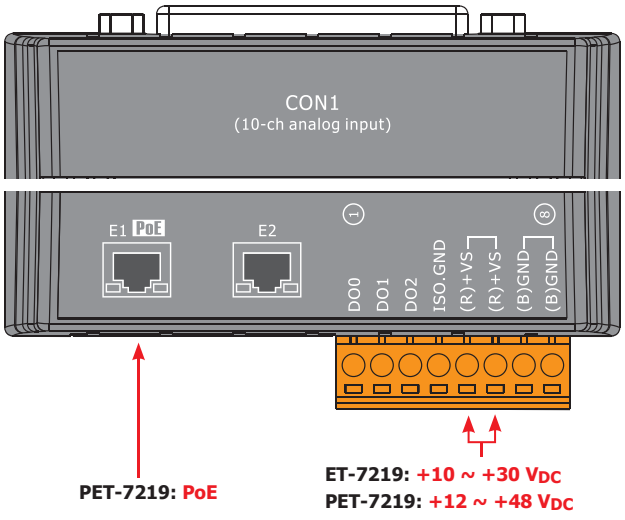


PET-7219: PoE

ET-7219: +10 ~ +30 VDC
PET-7219: +12 ~ +48 VDC


LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Dimensions (Units: mm)


DB-1820

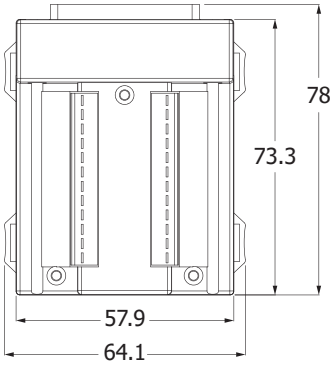


Front View




Rear View

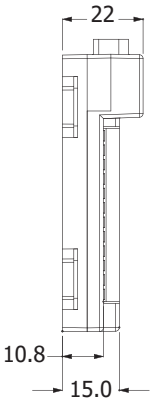

Left View

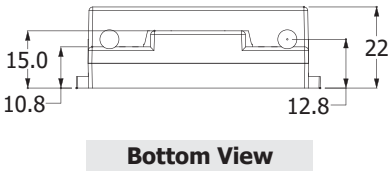


Bottom View




Top View


DN-1822

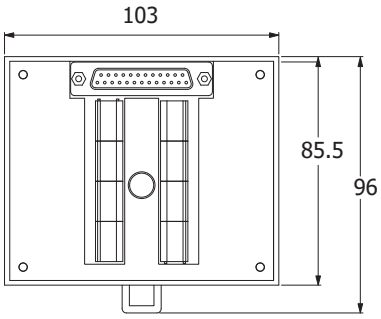


Front View



Rear View




Left View




Bottom View

Top View


DN-1823

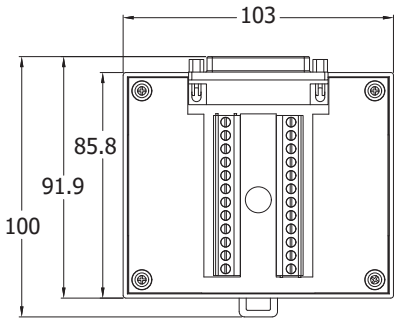


Front View



Rear View



Left View



Bottom View

Top View

Ordering Information

ET-7019Z/S CR	Ethernet I/O Module with Universal 10-ch AI, 6-ch DO (RoHS)	Includes DB-1820 Daughter Board
PET-7019Z/S CR	PoE I/O Module with Universal 10-ch AI, 6-ch DO (RoHS)	
ET-7219Z/S CR	Ethernet I/O Module with 2-port Ethernet Switch, Universal 10-ch AI, 3-ch DO (RoHS)	
PET-7219Z/S CR	PoE I/O Module with 2-port Ethernet Switch, Universal 10-ch AI, 3-ch DO (RoHS)	
ET-7019Z/S2 CR	Ethernet I/O Module with Universal 10-ch AI, 6-ch DO (RoHS)	Includes DN-1822 Daughter Board, CA-252518D-1 1.8 m Cable, 4PAPP-006-G
PET-7019Z/S2 CR	PoE I/O Module with Universal 10-ch AI, 6-ch DO (RoHS)	
ET-7219Z/S2 CR	Ethernet I/O Module with 2-port Ethernet Switch, Universal 10-ch AI, 3-ch DO (RoHS)	
PET-7219Z/S2 CR	PoE I/O Module with 2-port Ethernet Switch, Universal 10-ch AI, 3-ch DO (RoHS)	
ET-7019Z/S3 CR	Ethernet I/O Module with Universal 10-ch AI, 6-ch DO (RoHS)	Includes DN-1823 Daughter Board, CA-2525015D 15 cm Cable, 4PAPP-006-G
PET-7019Z/S3 CR	PoE I/O Module with Universal 10-ch AI, 6-ch DO (RoHS)	
ET-7219Z/S3 CR	Ethernet I/O Module with 2-port Ethernet Switch, Universal 10-ch AI, 3-ch DO (RoHS)	
PET-7219Z/S3 CR	PoE I/O Module with 2-port Ethernet Switch, Universal 10-ch AI, 3-ch DO (RoHS)	

Front **Rear**



(P)ET-7019Z/S, (P)ET-7219Z/S: DB-1820
Connects to the (P)ET-7x19Z Directly



(P)ET-7019Z/S2, (P)ET-7219Z/S2: DN-1822
connects to the (P)ET-7x019Z/S2 via a 1.8 m long flex cable



(P)ET-7019Z/S3:
DN-1823
connects to the (P)ET-7019Z/S3
via a 15 cm long flex cable



(P)ET-7219Z/S3:
DN-1823
connects to the (P)ET-7219Z/S3
via a 15 cm long flex cable

Accessories



PET-7018Z/S +
CD-25015 +4PAPP-006-G



CD-25015



4PAPP-006-G



PET-7018Z/S +CD-2518D
PET-7218Z/S +CD-2518D




CD-2518D

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Jumper


Notice:

1. Before adjusting the jumpers, remove the module's top cover. For the ET-7200 series, the screws are located on the rear cover, and the CPU board must be removed as well.

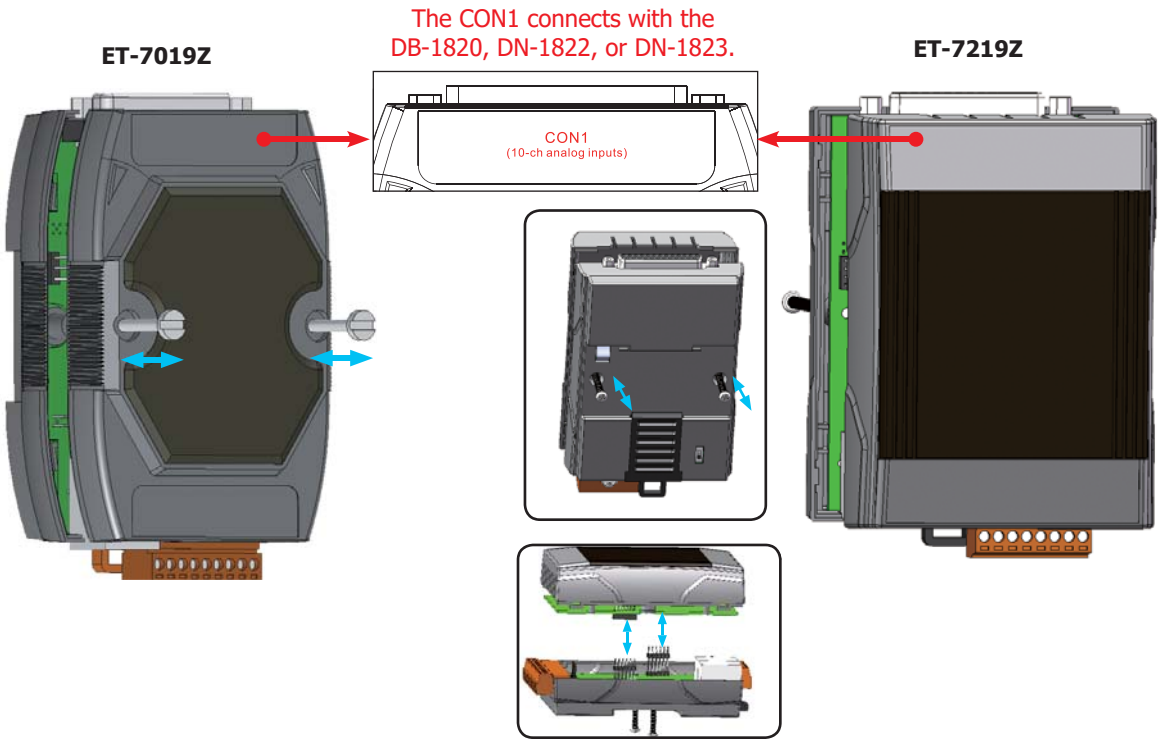

2. Users can locate the Jx/JPx jumpers on the board by checking the I/O labels on the cover.

Channel	CH0±	CH1±	CH2±	CH3±	CH4±	CH5±	CH6±	CH7±	CH8±	CH9±
Jumper	J1	J2	J3	J4	J5	J6	J7	J8	J9	J10

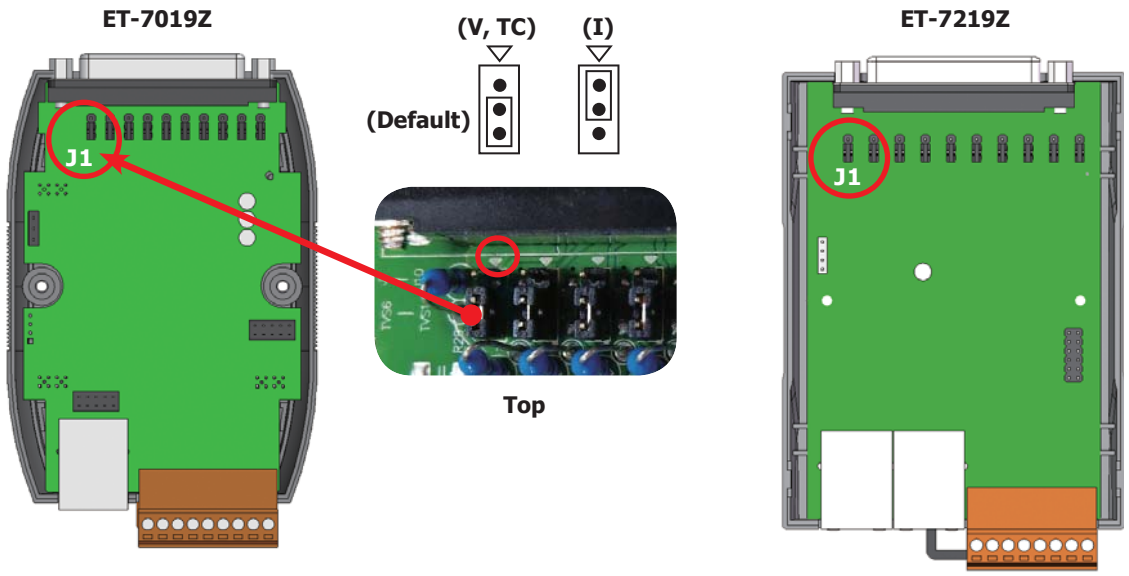

3. After adjusting the jumpers, reinstall the top cover (along with the CPU board) and secure the screws.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000