How to recover the default factory settings

Applied to:

Platform	***OS version***	***WinPAC/ViewPAC utility version***
WP-8x3x/ WP-8x4x	*All versions*	*All versions*
WP-5000	*All versions*	*All versions*
VP-23W1/ VP-25W1	*All versions*	*All versions*
VP-4131	*All versions*	*All versions*

Tips & Warnings



The following settings are affected in the recovery operation. Before recovering the default factory settings, record the current settings if necessary.

Default factory settings:


System Settings->Display resolution: ***800*600(WP-8x4x)***
System Settings->Display resolution: ***1024*768(WP-8x3x)***
Ethernet Settings->LAN1 (LAN2): DHCP enabled
FTP Settings->Access->Allow Anonymous: Enabled
FTP Settings->Access->Allow Anonymous Upload: Enabled
Auto Execution: empty
Multi-serial port wizard: uninstalled
Touch Panel Drivers: uninstalled
Control Panel->Power->Schemes->Switch state to User Idle: Never
Control Panel->Power->Schemes->Switch state to System Idle: Never
Control Panel->Network and Dial-up Connections: The settings of LAN1/2

You can recover the default factory settings as you need or an unexpected problem occurs with the following steps:


Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Step1. Reboot in Safe mode


1.1. Turn the rotary switch on the device to “**1**”, and then boot up the WinPAC/ViewPAC

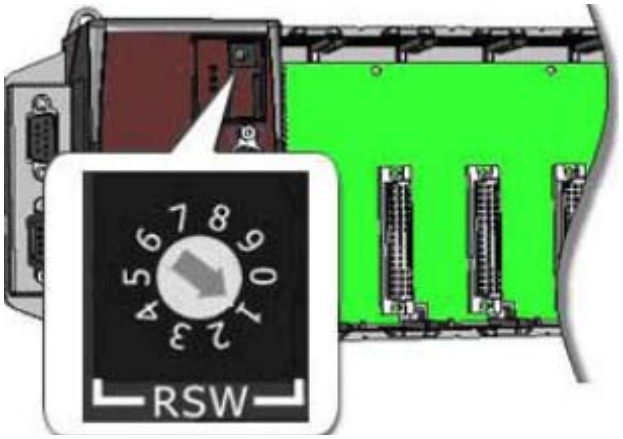

1.2. After rebooting, Click the “**No**” button.

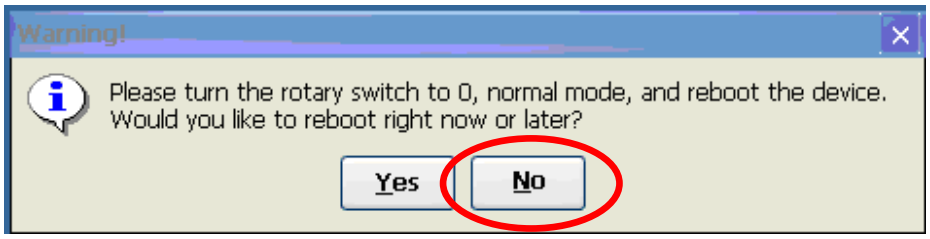


1.3. Turn the rotary switch to “**0**”.

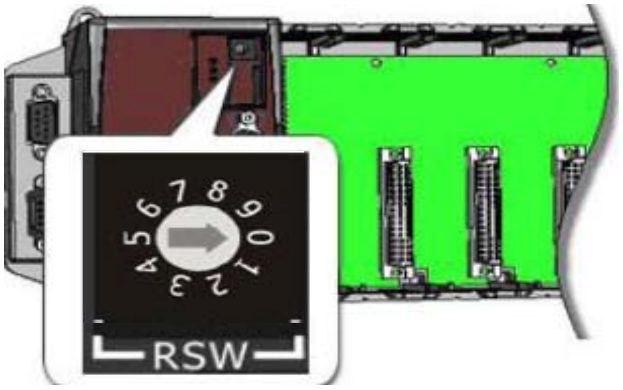


Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Step2. Recover the default factory settings

2.1. Start the WinPAC/ViewPAC Utility, and click "**File**" → "**Save and Reboot**" on the menu.

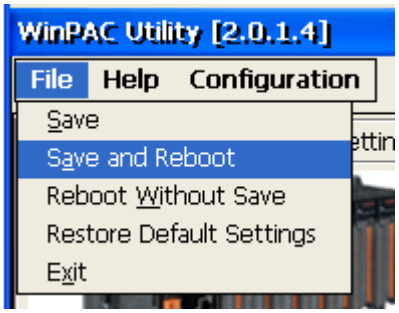

2.2. Click the "**Yes**" button and wait for the device to reboot.

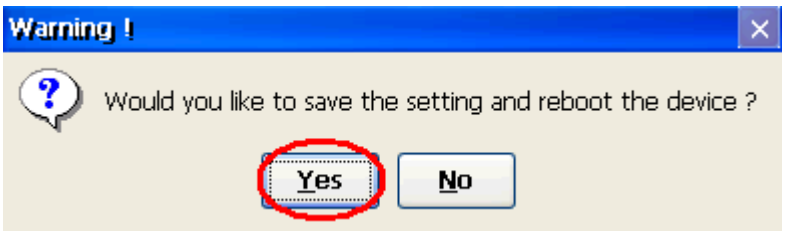

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Revision History

Revision	Date	Description
1.0.1	2013/08/16	NEW: Added support information for WP-5000 and VP-4131.
1.0.0	2010/02/12	Initial release

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000