How to recover the default factory settings

Applies to:

Platform	*OS Version*	*PAC Utility Version*
WinPAC	*All Versions*	*All Versions*
ViewPAC	*All Versions*	*All Versions*

Tips & Warnings

The following settings are affected in the recovery operation. Before recovering the default factory settings, record the current settings if necessary.

Default factory settings:


System Settings->Display resolution: ***800*600(WP-8x2x/WP-9000/WP523x)***
System Settings->Display resolution: ***800*480(VP-2201)***
System Settings->Display resolution: ***640*480(VP-1231)***
System Settings->Display resolution: ***800*600(VP-4231/VP-4201)***
System Settings->Display resolution: ***1024*768(VP-6231/VP-6201)***
Ethernet Settings->LAN1 (LAN2): DHCP enabled
FTP Settings->Access->Allow Anonymous: Enabled
FTP Settings->Access->Allow Anonymous Upload: Enabled
Auto Execution: empty
Multi-serial port wizard: uninstalled
Touch Panel Drivers: uninstalled
Control Panel->Power->Schemes->Switch state to User Idle: Never
Control Panel->Power->Schemes->Switch state to System Idle: Never
Control Panel->Network and Dial-up Connections: The settings of LAN1/2

You can recover the default factory settings as you need or an unexpected problem occurs with the following steps:


Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Step1. Reboot in Safe mode


1.1. Turn the rotary switch on the device to "**1**", and then boot up the WinPAC/ViewPAC

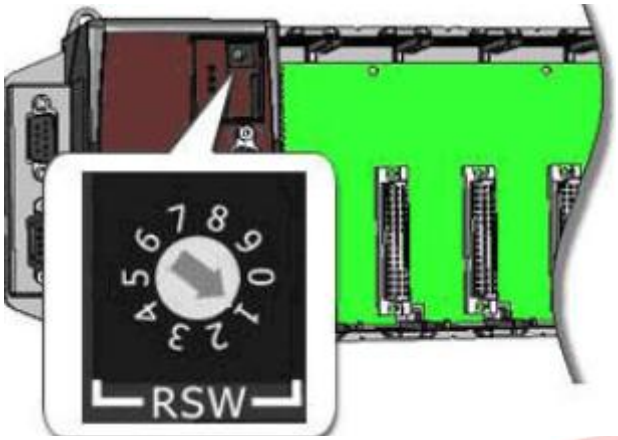

1.2. After rebooting, Click the "**OK**" button.

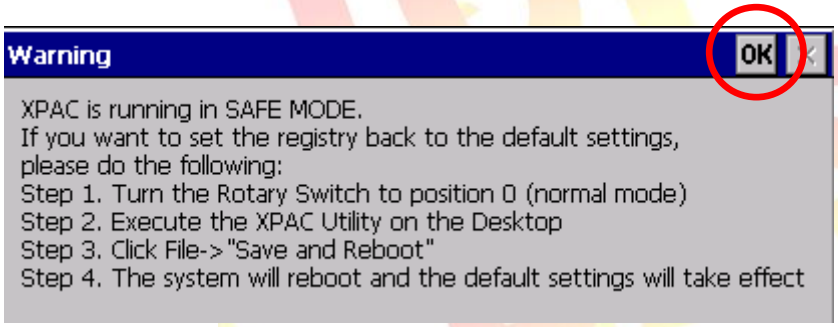


1.3. Turn the rotary switch to "**0**".

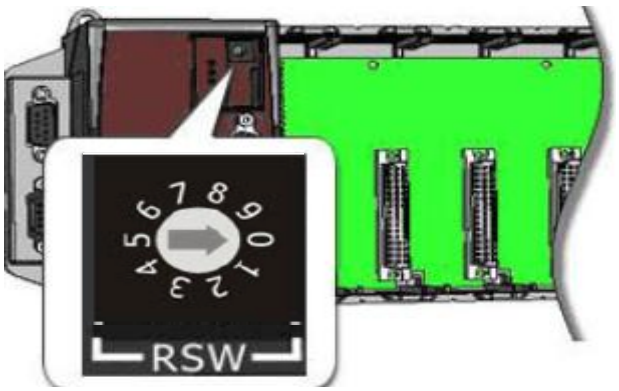


Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Step2. Recover the default factory settings

2.1. Start the WinPAC/ViewPAC Utility, and click "**File**" → "**Save and Reboot**" on the menu.

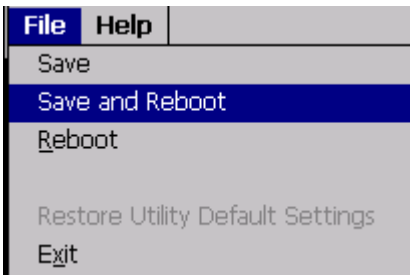

2.2. Click the "**Yes**" button and wait for the device to reboot.

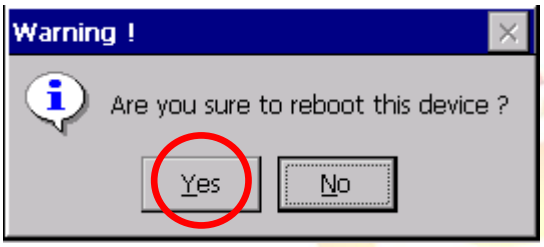

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000