

GPS-721U-MRTU

GPS/GLONASS Module with RS-232, RS-485, supports NEMA, DCON and Modbus/RTU protocols

GPS-721U-MRTU-UTA

GPS/GLONASS Module with RS-232, RS-485, supports NEMA, DCON and Modbus/RTU protocols (for -40 °C application)

Features

- Support GPS/GLONASS
- RS-232 and RS-485 support NMEA v0183 format, DCON or Modbus RTU protocol
- Built-in 1 channel DO, 1 channel PPS (1 pulse per second), 1 RS-485 port, 1 RS-232 port
- PPS: 100 ms pulse/s output for precise timekeeping and time measurement
- With various system LED indicators
- Fully compatible with SBAS (WAAS, EGNOS, MSAS)

Introduction

The GPS-721U-MRTU, GPS-721U-MRTU-UTA module provides high sensitivity and low power consumption with an ultra small form factor. The GPS/GLONASS module is powered by a u-blox solution and provides superior sensitivity and performance, even in an urban environment, or an environment that features dense foliage.

Applications

- Automotive navigation
- Marine navigation
- Personal positioning and navigation
- Precise timekeeping and time measurement
- Satellite time correction

Specifications


Model	GPS-721U-MRTU	GPS-721U-MRTU-UTA
LED Indicators		
Status	1 x Power/Communication 3 x GNSS	
GPS/GNSS		
Acquisition Time	Cold Start (Open Sky) = 29 s (typical)	
Chip	u-Blox solution	
Frequency	L1 1575.42 MHz, C/A code	
Max. Altitude	<50,000 m	
Max. Velocity	<500 m/s	
Position Accuracy	Autonomous: 2.5 m SBAS: 2.0 m	
Protocol	NMEA 0183 (9600 bps, N81 Fixed)	
Sensitivity	Tracking: Up to -161 dBm Cold start: Up to -148 dBm	
Support Channels	56	
1 PPS	Pulse per second output (Default 100 ms pulse/sec)	
Digital Output		
Channels	1 (Sink)	
Type	Non-isolated Open Collector	
Load Voltage	+5 VDC~ +30 VDC	
Load Current	100 mA	

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Specifications

COM Ports	
Ports	1x RS-232, 1x RS-485
Baud Rate	1200 ~ 115200 bps
Data Format	N81, N82, E81, O81
Protocol	RS-232/RS-485: DCON, Modbus RTU or NMEA 0183 (9600bps,N81 fixed)
Power	
Input Range	+10 VDC ~ +30 VDC (Non-regulated)
Consumption	2.5 W
Mechanical	
Casing	Plastic
Dimensions (mm)	72 x 117 x 35 (W x L x D)
Weight	200 g
Environment	
Operating Temperature	-25 ~ +75°C → GPS-721U-MRTU -40 ~ +75°C → GPS-721U-MRTU-UTA
Storage Temperature	-40 ~ +80°C
Humidity	5 ~ 95% RH, Non-condensing





Dimensions (Units: mm)

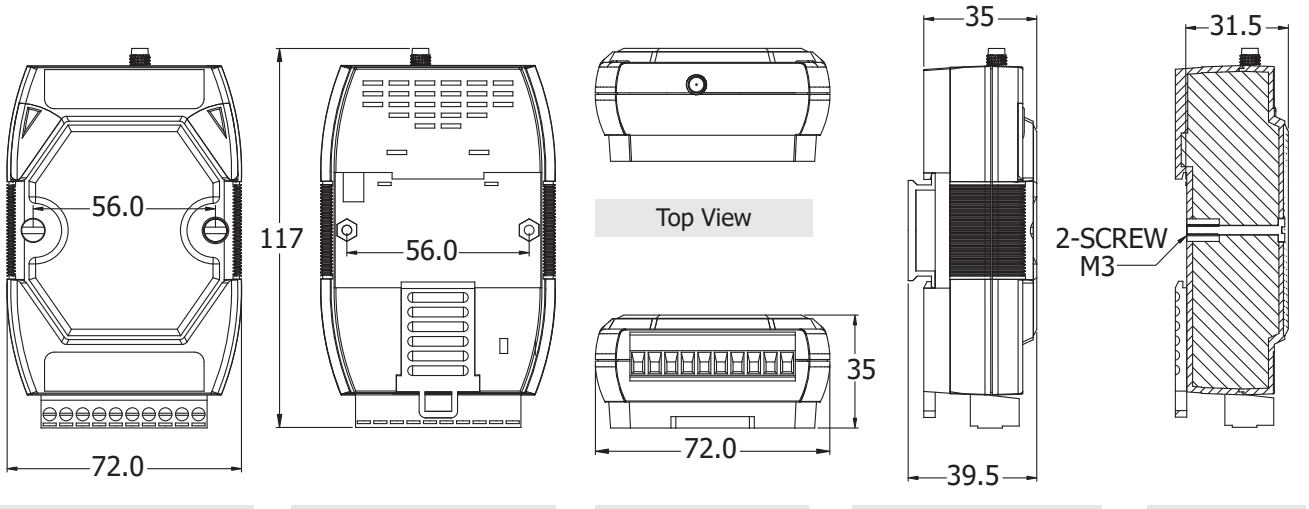


Front View | Rear View | Top View | Bottom View | Din-Rail Mounting Bracket | Side View

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000


Wiring

Output Type	ON State (LED ON)	OFF State (LED OFF)
Drive Relay	Relay ON	Relay OFF
		
Resistance Load		
		

Internal I/O Structure

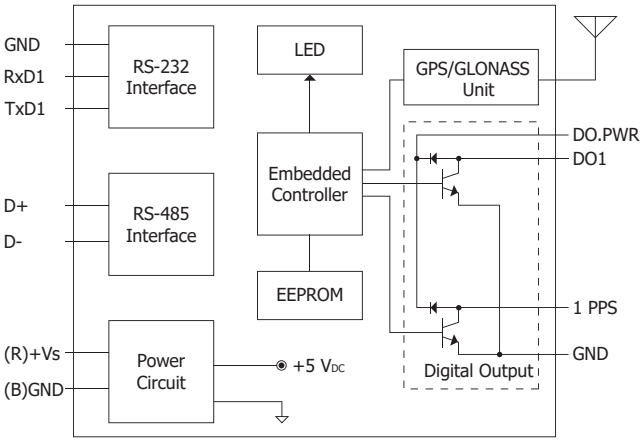

Appearance

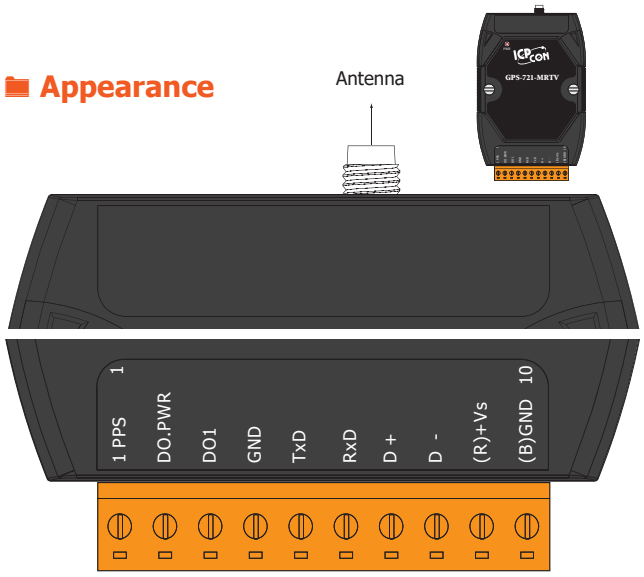

Ordering Information


GPS-721-MRTU CR	GPS/GLONASS Receiver Module with RS-232, RS-485, supports NMEA, DCON and Modbus/RTU protocols (RoHS) Includes a 5 m GPS antenna (ANT-115-03-02)
GPS-721-MRTU-UTA CR	GPS/GLONASS Receiver Module with RS-232, RS-485, supports NMEA, DCON and Modbus/RTU protocols (for -40 °C application) (RoHS) Includes a 5 m GPS antenna (ANT-115-03-02)


Accessories

ANT-115-03-02 CR	5 m Active External GPS Antenna (SMA Plug) (RoHS)

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

1 Pulse Per Second (PPS - Pulse Duration is 100 ms)

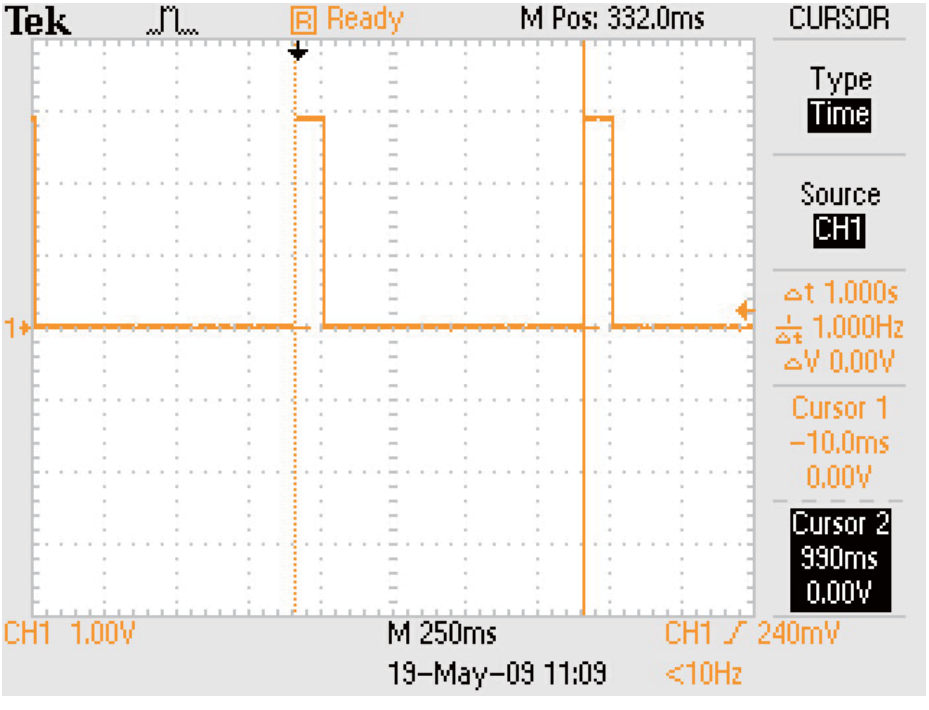

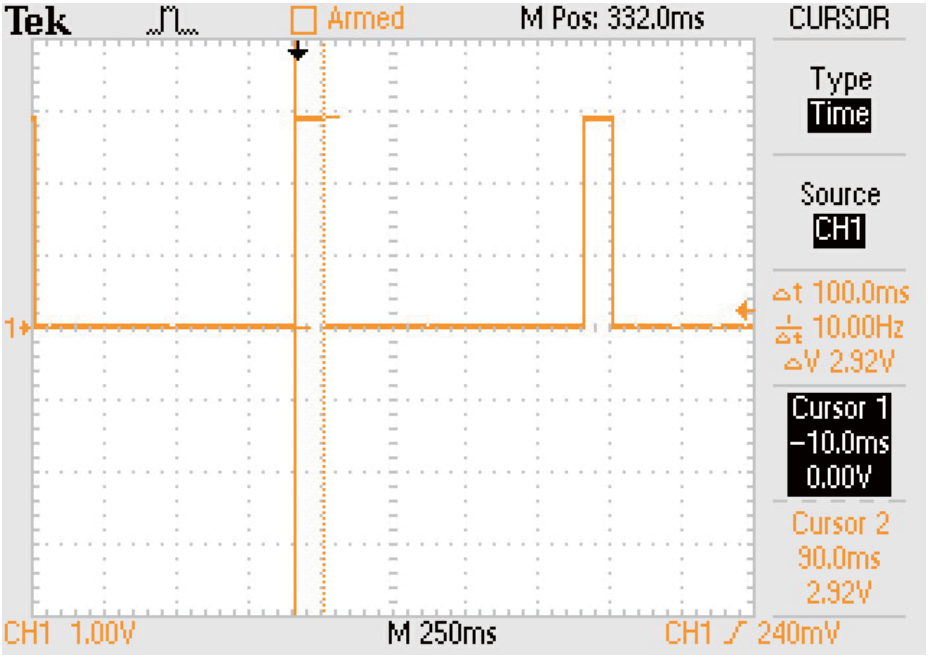

The GPS-721U-MRTU and the GPS-721U-MRTU-UTA can also be used as a time reference for radio clocks, but requires an accurate 1PPS output to be reliably used for time signals

A pulse per second (PPS) is an electrical signal that very precisely indicates the start of a second. PPS signals are output by various types of precision clock, including some models of GPS/GLONASS receivers. Depending on the source, properly operating PPS signals have an accuracy ranging from a few nanoseconds to a few milliseconds.

PPS signals are used for precise timekeeping and time measurement. One increasingly common use is in computer timekeeping, including

the NTP protocol. Since GPS/GLONASS is considered a stratum-0 source, a common use for the PPS signal is to connect it to a PC using a low-latency, low-jitter wire connection and allow a program to synchronize with it: this makes the PC a stratum-1 time source. Note that because the PPS signal does not specify the time, but merely the start of a second, one must combine the PPS function with another time source that provides the full date and time in order to ascertain the time accurately and precisely.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000