
DB-8425/DIN

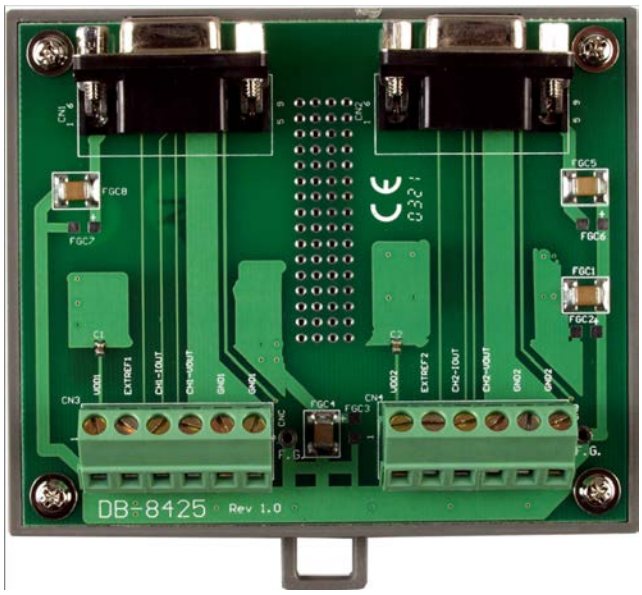


Two Female DB9 to Screw Terminal Board for PISO-DA2U with DIN-rail Mounting

Features

- Connector interface for PISO-DA2U
- Screw terminals for easy field wiring
- 9-pin D-sub connector pin to pin screw terminal for PISO-DA2U
- Current rating:1 A Max.
- Dielectric withstanding voltage: 250VAC for 1 minute
- DC rating: 24 V Max.

Pin Assignment

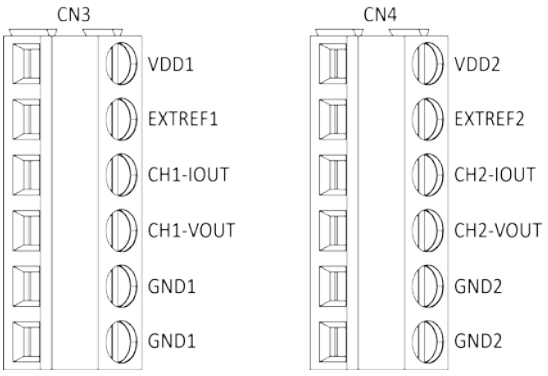

Pin Assignment	Terminal No.	Pin Assignment
GND1	05	
GND1	04	09 VDD1
EXTREF1	03	08 GND1
GND1	02	07 CH1-IOUT
CH1-VOUT	01	06 GND1
		CN1


Pin Assignment	Terminal No.	Pin Assignment
GND2	05	
GND2	04	09 VDD2
EXTREF2	03	08 GND2
GND2	02	07 CH2-IOUT
CH2-VOUT	01	06 GND2
		CN2

I/O Specifications

Mechanical	
Installation	DIN-Rail
Dimensions	103mm x 85.9mm (W x L)
Environment	
Operating Temp.	0 ~ +60 ℃
Storage Temp.	-30 ~ 80 ℃
Humidity	10 ~ 90% RH, non-condensing

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Dimensions (Units: mm)

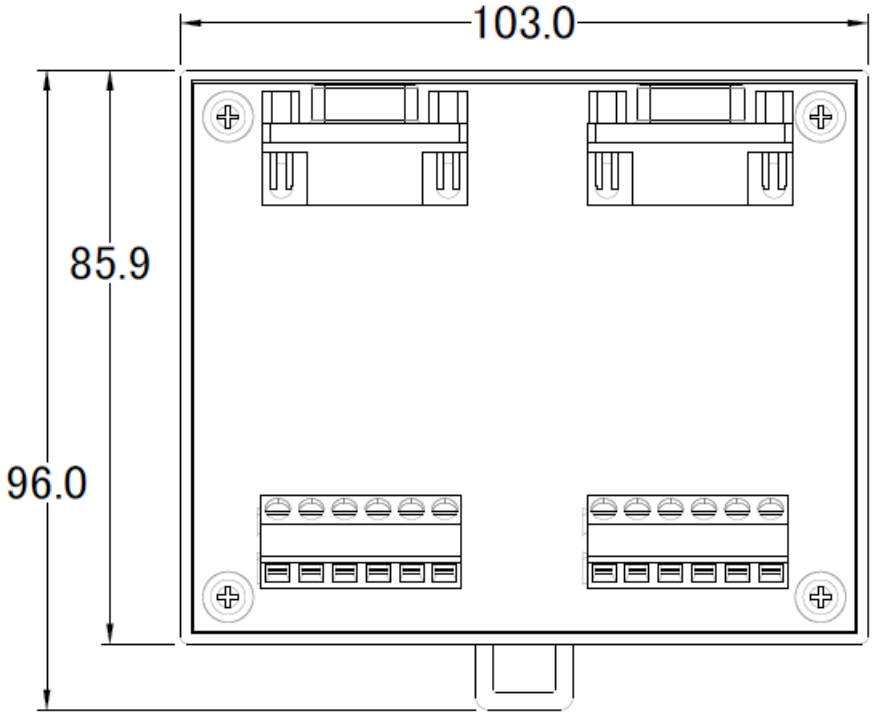

Front View

Ordering Information

DB-8425/DIN	Two Female DB9 to Screw Terminal Board for PISO-DA2U with DIN-rail Mounting Include: CA-0920 (DB9(Male) to DB9(Male) Cable [RS-232; Pin1-Pin9], 2M)

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000