

DL-301-WF-IP65
DL-302-WF-IP65
DL-303-WF-IP65
DL-304-WF-IP65
DL-305-WF-IP43
DL-306-WF-IP65
DL-307-WF-IP65
DL-308-WF-IP65

Remote CO/CO2/HCHO/TVOC/NH3/H2S/Temperature/ Humidity/Dew Point Data Logger Module (Asia Only)


Features

- Able to record CO, CO2, HCHO, TVOC, NH3, H2S, Temperature, Humidity, and Dew Point Measurements
- Non-dispersive Infrared (NDIR) CO2 Sensor
- 2.8" LCD Touch Screen
- Up to 450,000 Records with Date and Time Stamps
- Touch-screen and Web-based Configuration Interface
- Simple and Powerful Software Utility, iOS App and Android App Included
- Able to Display Multilingual Messages on the Screen
- Supports the DCON, Modbus RTU and Modbus TCP Protocols
- Supports the MQTT Protocol for Ethernet Interface
- Includes RS-485/Ethernet/Wi-Fi Communication Interfaces
- Includes Redundant Power Inputs: PoE (IEEE 802.3af, Class 1) and DC Input
- Compatible with IEEE802.11b/g/n Standards
- Support Infrastructure and Limit-AP Modes for Wireless Networks
- Relay Output for Audible/Visual Alarm or Device Control
- Web-based configuration interface and firmware update via Ethernet
- IP65/IP43 Protection Approval

Introduction


The DL-300-WF-IP65/IP43 series is a gas detector monitoring module with Wi-Fi, Ethernet and RS-485 interfaces. It provides a WLAN connection which complies with the IEEE802.11b/g/n standards. With the popularity of 802.11 network infrastructure, the modules make an easy way to incorporate wireless connectivity into monitoring and control systems. The DL-300-WF-IP65/IP43 series of Data Logger devices can be used to record CO, CO2, HCHO, TVOC, NH3, H2S, Temperature, Humidity and Dew Point information, including date and time stamps, and are able to store up to 450,000 downloadable records. Real-time data can be accessed from the DL-300-WF-IP65/IP43 series Data Logger from anywhere and at any time using the free Windows software, the iOS App or the Android App, as long as they are connected to the same local network as the data Logger. Support is provided for popular industrial protocols such as DCON, Modbus RTU, and Modbus TCP. For Ethernet interface, It also support the emerging machine-to-machine (M2M)/IoT (Internet of Things) connectivity protocol - MQTT. The DL-300-WF-IP65/IP43 series Data Logger can be connected via widely used communication interfaces including RS-485, Ethernet, PoE and Wi-Fi, meaning that the device can be easily integrated into existing HMI or SCADA systems, and is easy to be maintained in a distributed control system. The IP65/ IP43 is designed for industrial applications in harsh environments that provides IP65/IP43 grade protection approval. The rugged RJ-45 ensures tight, robust connections, and guarantees reliable operation, even for applications that are subject to high vibration and shock.

Large 2.8" LCD Touch Screen, with clear Color Chart to indicate the CO/CO2 Level

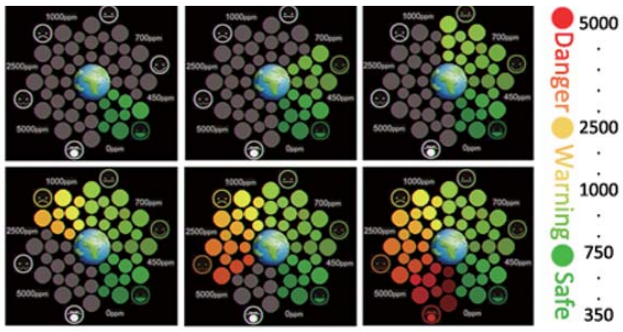


Simple and powerful utility

The DL300 Utility can be used to configure the modules, monitor real-time data, group DL-300 modules so that the status of distribution groups can be viewed and managed. The utility also allows the log data to be downloaded and exported to a .CSV file that can then be imported into any industry-standard software or spread sheet for analysis.

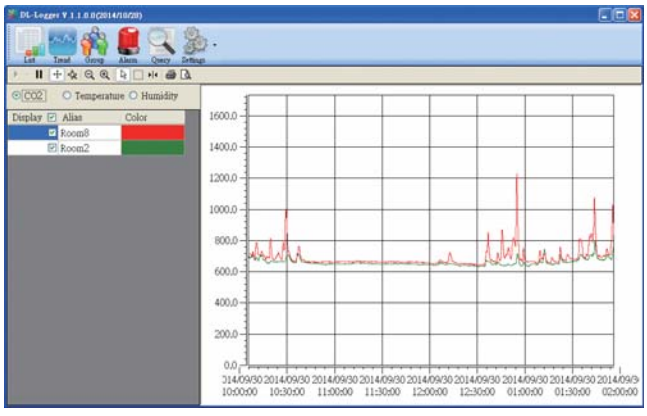

Supports the MQTT Protocol for IoT Applications

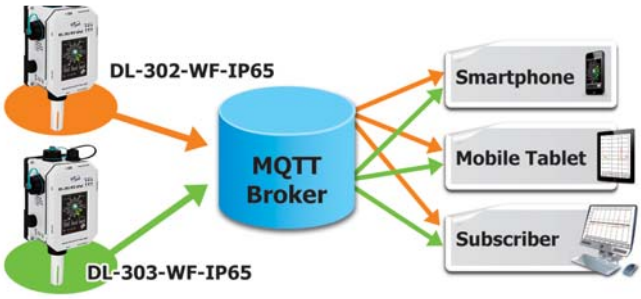

Multi-platform Remote Access Software

Real-time data from the DL-300 Data Logger can be accessed from anywhere and at any time using the DL300 Utility, the iOS or Android App, or via a regular web browser, as long as they are connected to the same local network as the Data Logger.



Display Messages in Multiple Languages

The display-message-on-screen function supports multiple language character sets based on UTF-8 encoding. Either pre-configured messages or dynamic messages can be remotely displayed using Modbus commands, or a dynamic message can be sent via the web-based interface.




Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

➲ **Real-time data from the DL-300-WF series can be accessed from anywhere and at any time using the WF-IIOT-Utility and iOS App.**


▲ iOS APP QR CODE

▲ Android APP QR CODE

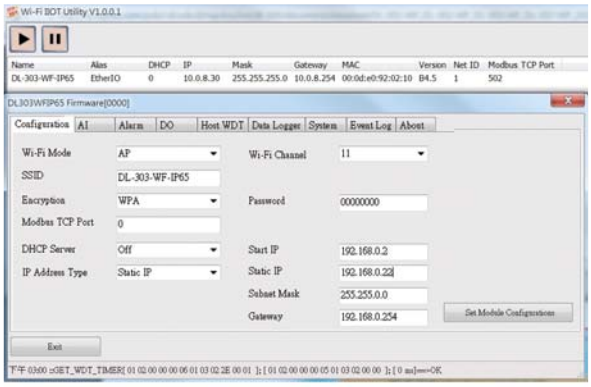


▲ WiFi_IIOT_Utility


Appearance

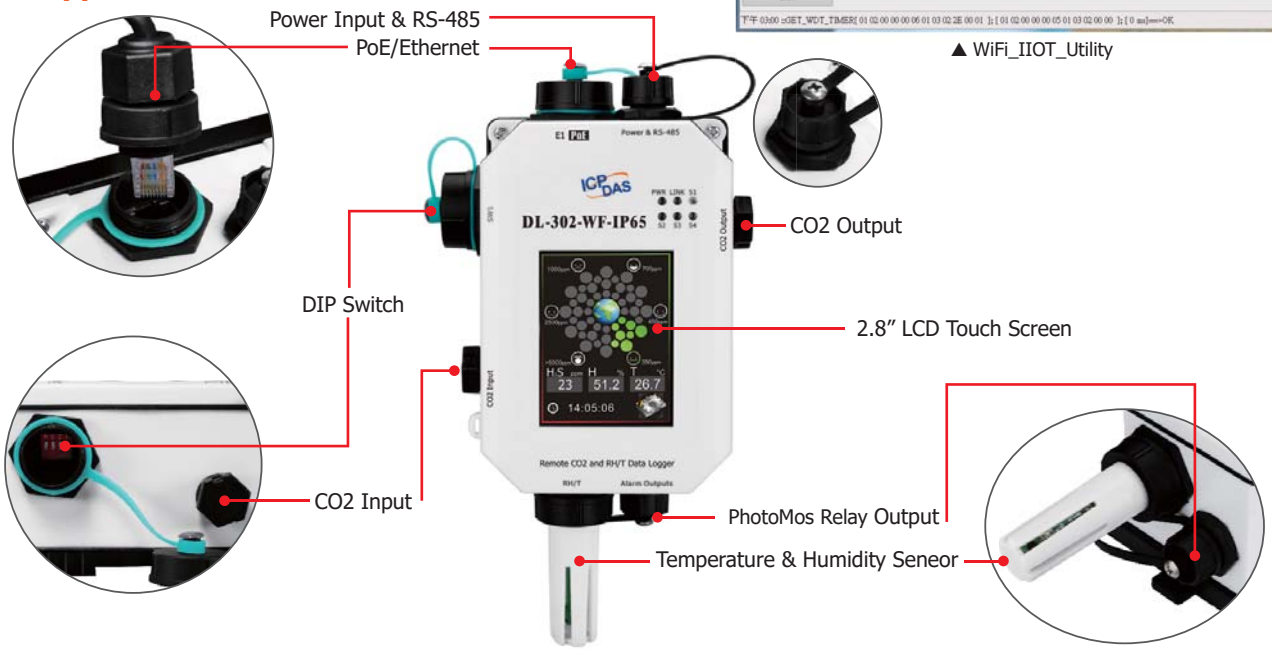

Dimensions (Units: mm)

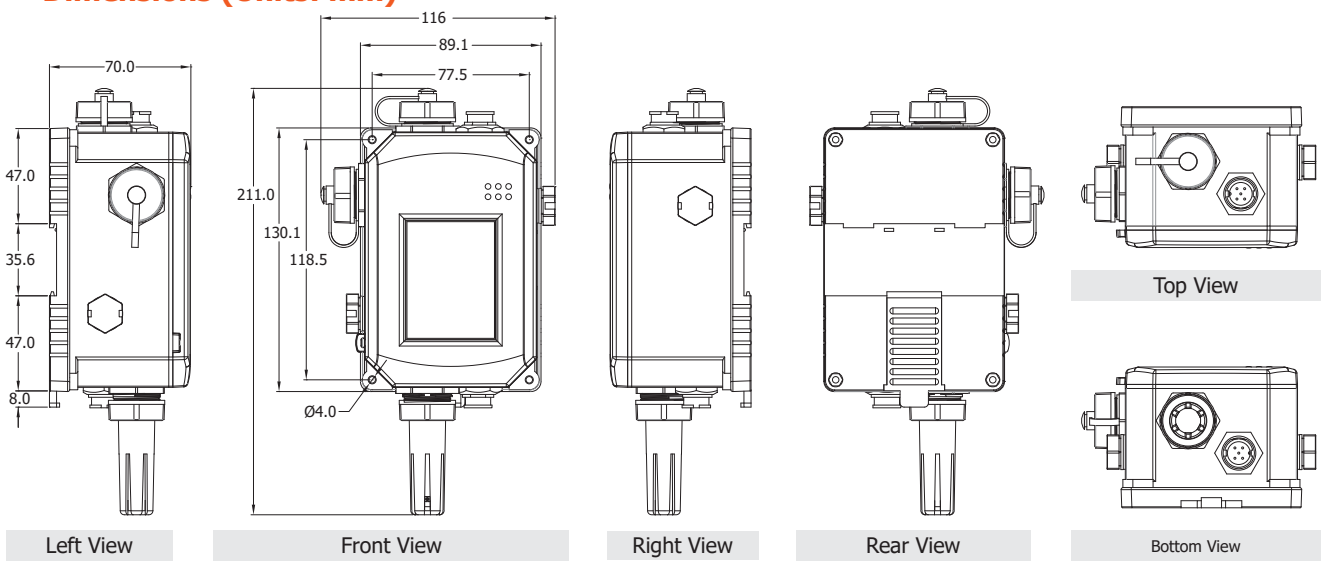


IP65 Ethernet Cap with Tether




IP65 Ethernet Plug

Cable Dia:
Max. 7.0 mm
Min. 5.5 mm



IP65 PWR Plug

Cable Dia:
Max. 6.5 mm
Min. 5.0 mm



LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Applications

Mushroom Farm

Mushroom growth yield requires long time to monitor the environment of CO2 concentration, temperature and humidity values, and its growth environment is high humidity condition. The general equipment cannot work in such environment, but the DL-302-WF-IP65 can be used to record CO2, temperature, humidity and dew point information with date and time stamps in the operating temperature from -20°C to +50°C, and are able to store up to 450,000 downloadable records . The WISE-5231-3GWA features timer and schedule functions. It allows user to schedule specific date or time for control logic execution, or perform specific tasks such as time delay. With calendar user interface provided, schedule setting can be more efficient and flexible. This does not require programming, only some simple settings will be able to achieve the farm production control and quality control, production resume ... and so on.



Pig Farm

Ammonia and Hydrogen sulfide are two of the most harmful gases in animal farming environment. They will directly affect animals' growth and immunity. Pig farm requires long-term immediate monitoring the environment of NH3 concentration, temperature and humidity values. The general equipment cannot work in such environment, but the DL-305-WF-IP65 can be used to record NH3, temperature, humidity and dew point information with date and time stamps in the operating temperature from -20°C to +50°C, and are able to store up to 450,000 downloadable records . The WISE-5231-3GWA features timer and schedule functions. It allows user to schedule specific date or time for control logic execution, or perform specific tasks such as time delay. With calendar user interface provided, schedule setting can be more efficient and flexible. This does not require programming, only some simple settings will be able to achieve the farm production control and quality control, production resume ... and so on.



Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

System Specifications

Model		DL-301-WF-IP65	DL-302-WF-IP65	DL-303-WF-IP65	DL-304-WF-IP65	DL-305-WF-IP43	DL-306-WF-IP65	DL-307-WF-IP65	DL-308-WF-IP65
System									
CO Alarm		Yes	-	Yes	-				
CO2 Alarm			Yes	Yes	-				
HCHO Alarm		-			Yes	-		Yes	-
TVOC Alarm		-			Yes	-			Yes
NH3 Alarm		-				Yes	-		
H2S Alarm		-					Yes	-	
RH/Temperature Alarm		Yes							
Real Time Clock		Yes							
Data Logger		Yes, up to 450,000 records							
Relay Output		PhotoMos Relay × 4, 100 VDC @ 1 A							
Software									
Built-in Web Server		Yes							
CPU Module									
Real Time Clock		Yes							
Watchdog Timer		Yes, Module (2.3 sec), Communication (Programmable)							
Display									
Backlight Life		20,000 hours							
Brightness		160 cd/m2							
Touch Panel		Yes							
LCD Information Displayed		2.8 TFT (Resolution 240 x 320 x 16), Defective Pixels <= 3							
LED Indicators									
	PWR	Green for normal operation							
Status	Link	Green for the Ethernet-linked							
	S1 ~ S4	Red for an alarm condition							
System									
Security		IP filter (whitelist) and Password (web)							
Real Time Clock		Yes							
Security		Yes, up to 450,000 records							
Wi-Fi									
Transmission Range		50 meters (LOS)							
Standard Supported		IEEE 802.11 b/g/n							
RX Sensitivity		-95.7 dBm @ 1 DSSS, -74.0 dBm @ 54 OFDM							
Output Power		18 dBm @ 1 DSSS, 14.5 dBm @ 54 OFDM							
Mode		Infrastructure & Limited AP							
Protocol		Modbus/TCP							
Encryption		WEP, WPA and WPA2							
Antenna		1 dBi (PCB Antenna)							
Relay Output									
Type		PhotoMos Relay × 4, 100 VDC @ 1 A							
COM Ports									
Ports		1 x RS-485							
Baud Rate		1200 ~ 115200 bps							
Protocol		DCON, Modbus/RTU							
Ethernet									
Ports		10/100 Base-TX, 8-Pin RJ-45 x1(Auto-negotiating, Auto-MDI/MDIX, LED indicators)							
PoE		Yes							
Protocol		Modbus/TCP, MQTT							
Power									
Consumption	PoE	3.4 W (Max.)	3.5 W (Max.)	3.5 W (Max.)	2.0 W (Max.)	2.9 W (Max.)	2.9 W (Max.)	2.1 W (Max.)	2.0 W (Max.)
	Non-PoE	3.1 W (Max.)	3.1 W (Max.)	3.2 W (Max.)	2.0 W (Max.)	3.0 W (Max.)	3.0 W (Max.)	2.1 W (Max.)	2.0 W (Max.)
Powered from PoE		+12 ~+48 VDC							
Powered from Terminal Block		IEEE 802.3af, Class 1 (48 V)							
Mechanical									
Dimensions (mm)		116 x 211 x 70 (W x L x H)							
Installation		DIN-Rail or Wall Mounting							
Ingress Protection Rating		IP65				IP43	IP65		
Environment									
Operating Temperature		-20 to +50°C							
Storage Temperature		-30 to +75°C							
Humidity		10 ~ 90% RH, Non-condensing							

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

I/O Specifications

Model	DL-301-WF-IP65	DL-302-WF-IP65	DL-303-WF-IP65	DL-304-WF-IP65	DL-305-WF-IP43	DL-306-WF-IP65	DL-307-WF-IP65	DL-308-WF-IP65
CO Measurement								
Range	0 to 1000 ppm (Electrochemical)	-	0 to 1000 ppm (Electrochemical)	-				
Resolution	1 ppm	-	1 ppm	-				
Accuracy	±5% of measured value	-	±5% of measured value	-				
Response Time	30 sec	-	30 sec	-				
Warm-up Time	300 sec	-	300 sec	-				
CO2 Measurement								
Range	-	0 to 9999 ppm (NDIR)		-				
Resolution	-	1 ppm		-				
Accuracy	-	±30 ppm ±3% of measured value		-				
Response Time	-	20 sec		-				
Warm-up Time	-	60 sec		-				
HCHO Measurement								
Range	-			0 ppb to 2000 ppb (Electrochemical)	-		0 ppb to 2000 ppb (Electrochemical)	-
Resolution	-			1 ppb	-		1 ppb	-
Accuracy	-			0 ~ 300ppb : ±30ppb > 300ppb : ±10%	-		0 ~ 300ppb : ±30ppb > 300ppb : ±10%	-
Response Time	-			≤60 sec	-		≤60 sec	-
Warm-up Time	-			180 sec	-		180 sec	-
TVOC Measurement								
Range	-			0 ppb to 60000 ppb (MEMS Metal Oxide)	-			0 ppb to 60000 ppb (MEMS Metal Oxide)
Resolution	-			1 ppb	-			1 ppb
Accuracy	-			±15%	-			±15%
Response Time	-			60 sec	-			60 sec
Warm-up Time	-			180 sec	-			180 sec
NH3 Measurement								
Range	-				0 to 100 ppm (Electrochemical)	-		
Resolution	-				1 ppm	-		
Accuracy	-				±5% of measured value	-		
Response Time	-				< 40 Sec	-		
Warm-up Time	-				60 Sec	-		
H2S Measurement								
Range	-					0 to 100 ppm (Electrochemical)	-	
Resolution	-					1 ppm	-	
Accuracy	-					±5% of measured value	-	
Response Time	-					< 30 Sec	-	
Warm-up Time	-					60 Sec	-	
Temperature Measurement								
Range	-20 to +50°C							
Resolution	0.1°C							
Accuracy	±0.6°C							
Relative Humidity Measurement								
Range	0 to 100% RH, Non-condensing							
Resolution	0.1% RH, Non-condensing							
Accuracy	±5% RH, Non-condensing							
Dew Point								
Range	Calculated using temperature and relative humidity							
Resolution	0.1°C							

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Ordering Information

DL-301-WF-IP65 CR	IP65 Remote CO/Temperature/Humidity/Dew Point Data Logger with Safety Alarm (RS-485, Ethernet, PoE, Wi-Fi) (RoHS) (Asia Only)
DL-302-WF-IP65 CR	IP65 Remote CO2/Temperature/Humidity/Dew Point Data Logger with Safety Alarm (RS-485, Ethernet, PoE, Wi-Fi) (RoHS) (Asia Only)
DL-303-WF-IP65 CR	IP65 Remote CO/CO2/Temperature/Humidity/Dew Point Data Logger with Safety Alarm (RS-485, Ethernet, PoE, Wi-Fi) (RoHS) (Asia Only)
DL-304-WF-IP65 CR	IP43 Remote HCHO/TVOC/Temperature/Humidity/Dew Point Data Logger with Safety Alarm (RS-485, Ethernet, PoE, Wi-Fi) (RoHS) (Asia Only)
DL-305-WF-IP43 CR	IP65 Remote NH3/Temperature/Humidity/Dew Point Data Logger with Safety Alarm (RS-485, Ethernet, PoE, Wi-Fi) (RoHS) (Asia Only)
DL-306-WF-IP65 CR	IP65 Remote H2S/Temperature/Humidity/Dew Point Data Logger with Safety Alarm (RS-485, Ethernet, PoE, Wi-Fi) (RoHS) (Asia Only)
DL-307-WF-IP65 CR	IP65 Remote HCHO/Temperature/Humidity/Dew Point Data Logger with Safety Alarm (RS-485, Ethernet, PoE, Wi-Fi) (RoHS) (Asia Only)
DL-308-WF-IP65 CR	IP65 Remote TVOC/Temperature/Humidity/Dew Point Data Logger with Safety Alarm (RS-485, Ethernet, PoE, Wi-Fi) (RoHS) (Asia Only)

Accessories

Mode Name	**NS-205-IP67**	**NS-208PSE-IP67**	**NS-208-IP67**
Picture			
PoE	–	802.3af x 8	–
Input Voltage Range	+10 VDC ~ +30 VDC (1 kV Isolated)	+46 VDC ~ +53 VDC	+12 VDC ~ +53 VDC
Installation	Wall Mounting	Wall Mounting	
Dimensions (W x L x H)(Unit: mm)	85 x 76 x 137	190 x 155 x 104	

IP67 RJ-45 Plug	Cap with Tether	IP67 Waterproof Cable, 1M
		
4SASO-0001	4SASO-0004	CA-05BFFM-LL7A01

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000