# How to set up an ELO USB touch panel


*Applied to:*

| *Platform* | *OS version* | *WinPAC/ViewPAC utility version* |
|---|---|---|
| *WP-8x3x/ WP-8x4x* | *All versions* | *All versions* |
| *WP-5000* | *All versions* | *All versions* |
| *VP-23W1/ VP-25W1* | *N/A* | *N/A* |
| *VP-4131* | *N/A* | *N/A* |

*N/A: Not applicable to this platform and OS.*

## Tips & Warnings

⚠ *To use a touch panel and a keyboard at the same time on WP-8x4x, you need a USB hub to expand the single USB port of WP-8x4x into several.*

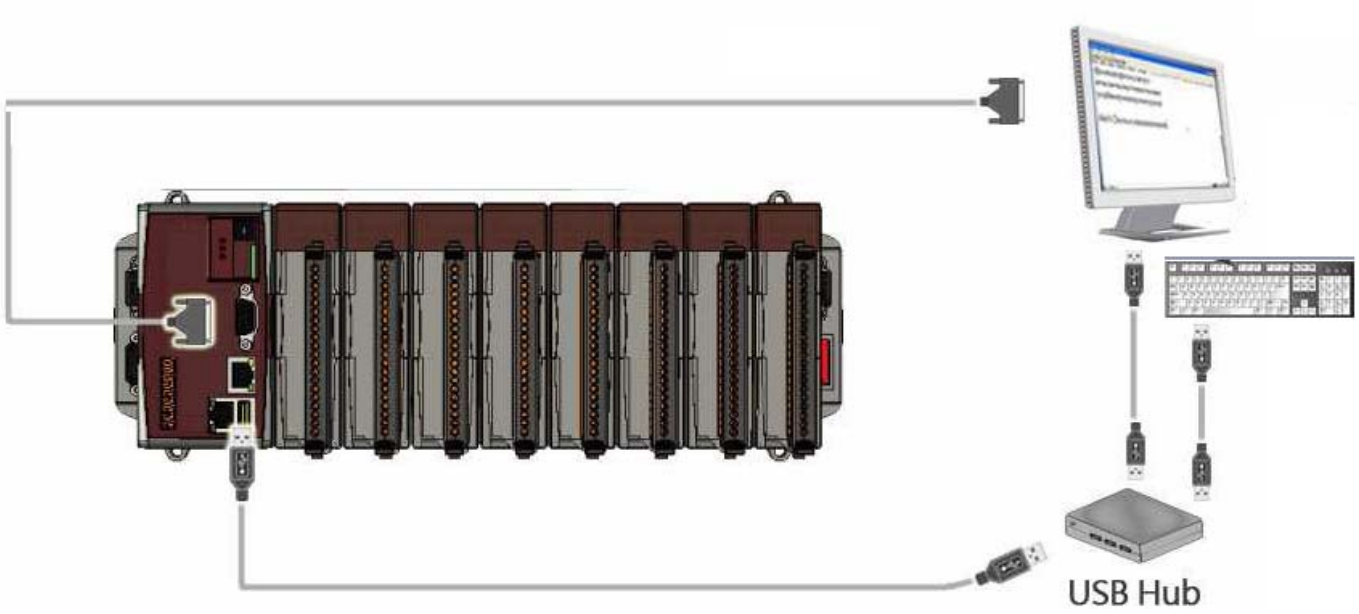




LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

To use an ELO USB touch panel, perform the following steps:

**Step 1:** Locate the driver.

The **ELO_USB_TOUCH_V20100506.CAB** is located at

1. **WinPAC file path:** \Micro_SD\External_device_driver\
2. CD: \napdos\wp-8x4x_ce50\Micro_SD\External_device_driver\
3. ftp://ftp.icpdas.com/pub/cd/winpac/napdos/wp-8x4x_ce50/Micro_SD/external_device_driver/

**Step 2:** Install the driver.


2.1. Double click the **ELO_USB_TOUCH_V20100506.CAB** file, and then click "**OK**".




**Step 3:** Save and Reboot your WinPAC.

3.1. Start the Win PAC utility on the desktop and click the "**File**" → "**Save and Reboot**".

3.2. Click the "**Yes**" button on the warning window and wait for reboot.

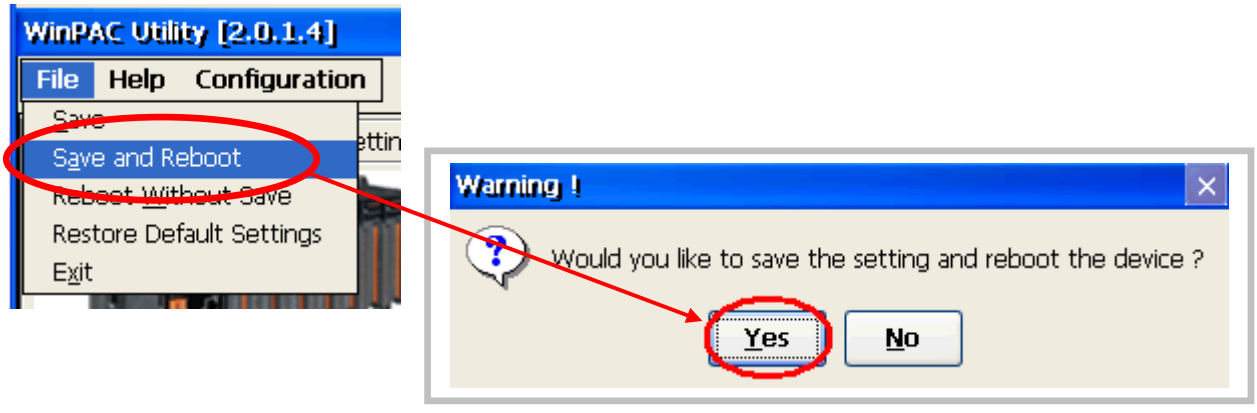






Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

**Step 4:** Calibrate the touch panel.

4.1. After rebooting, click Start → Programs → USB_TOUCH → ELO → EloVa.

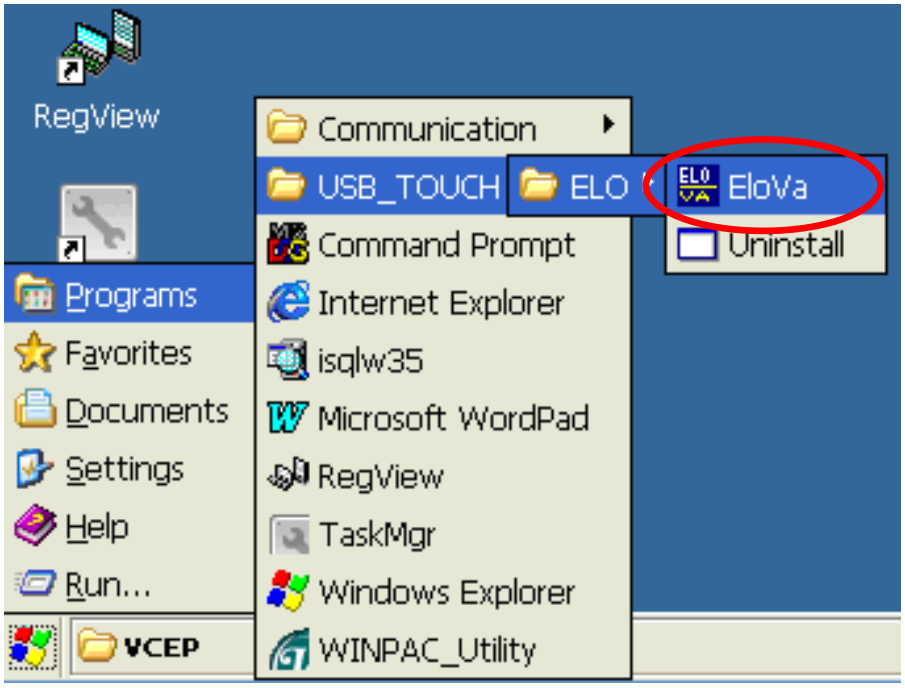



4.2. Touch the “+” icons on the monitor one by one to perform the calibration process.

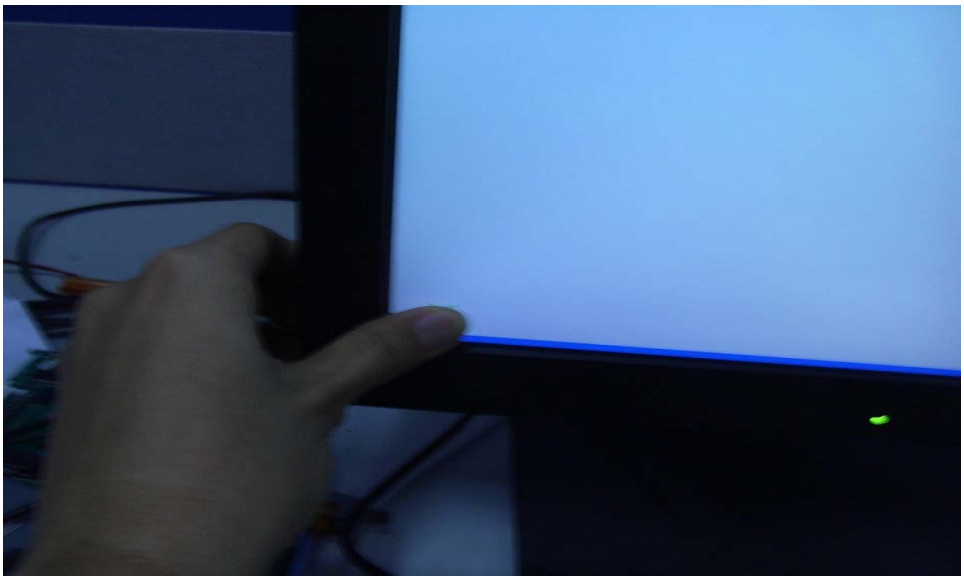




LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

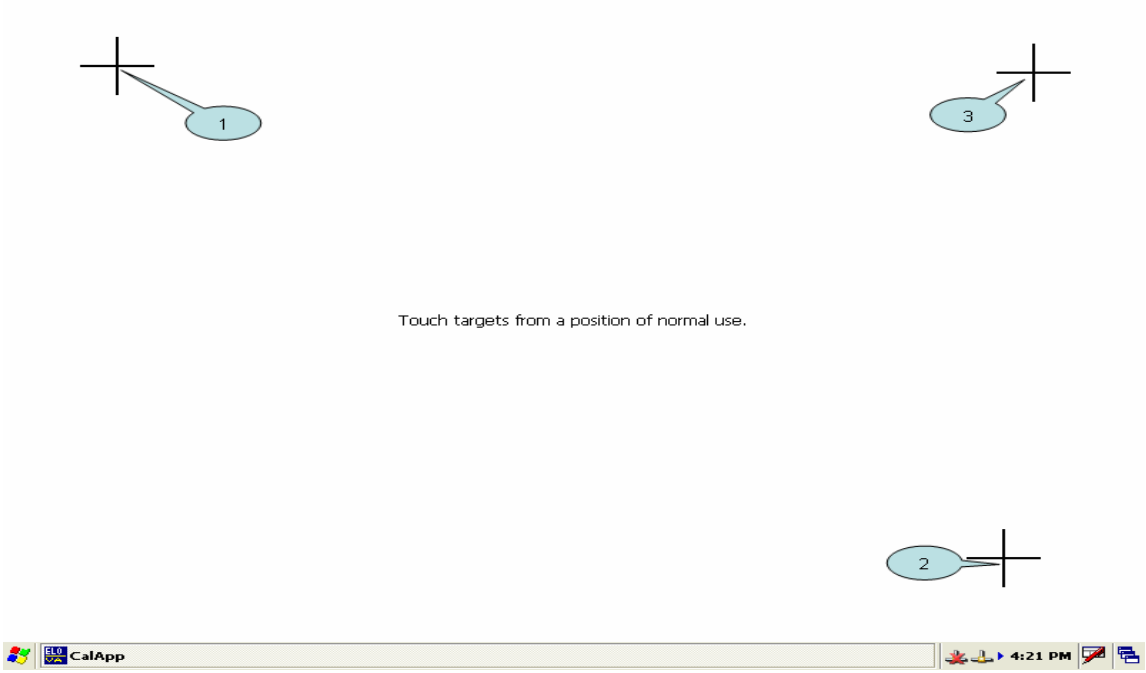


**Step 5:** Save the settings.

5.1. Start the Win PAC utility and click the "**File**" → "**Save and Reboot**" menu option.

5.2. Click the "**Yes**" button and wait for reboot.

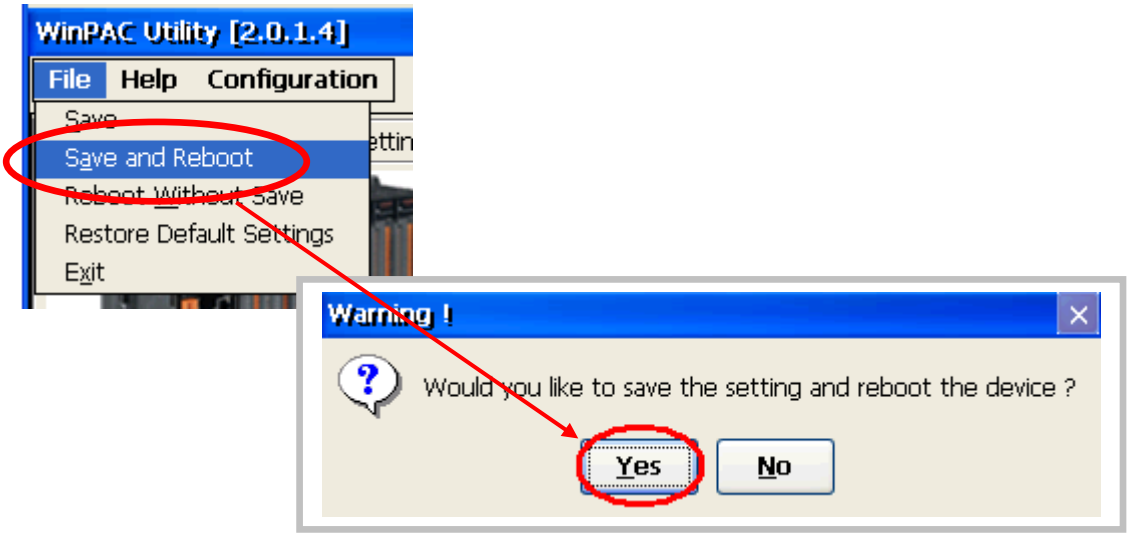




LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

## Revision History

| Revision | Date | Description |
|---|---|---|
| 1.0.1 | 2013/08/06 | NEW: Added support information for WP-5000 series |
| 1.0.0 | 2010/02/12 | Initial release |



Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000