
How to set up a Penmount USB touch panel

Applies to:

Platform	*OS Version*	*PAC Utility Version*
WinPAC	*All Versions*	*All Versions*

Tips & Warnings

⚠ *To use a touch panel and a keyboard at the same time on WP-8x2x, you need a USB hub to expand the single USB port of WP-8x2x into several.*

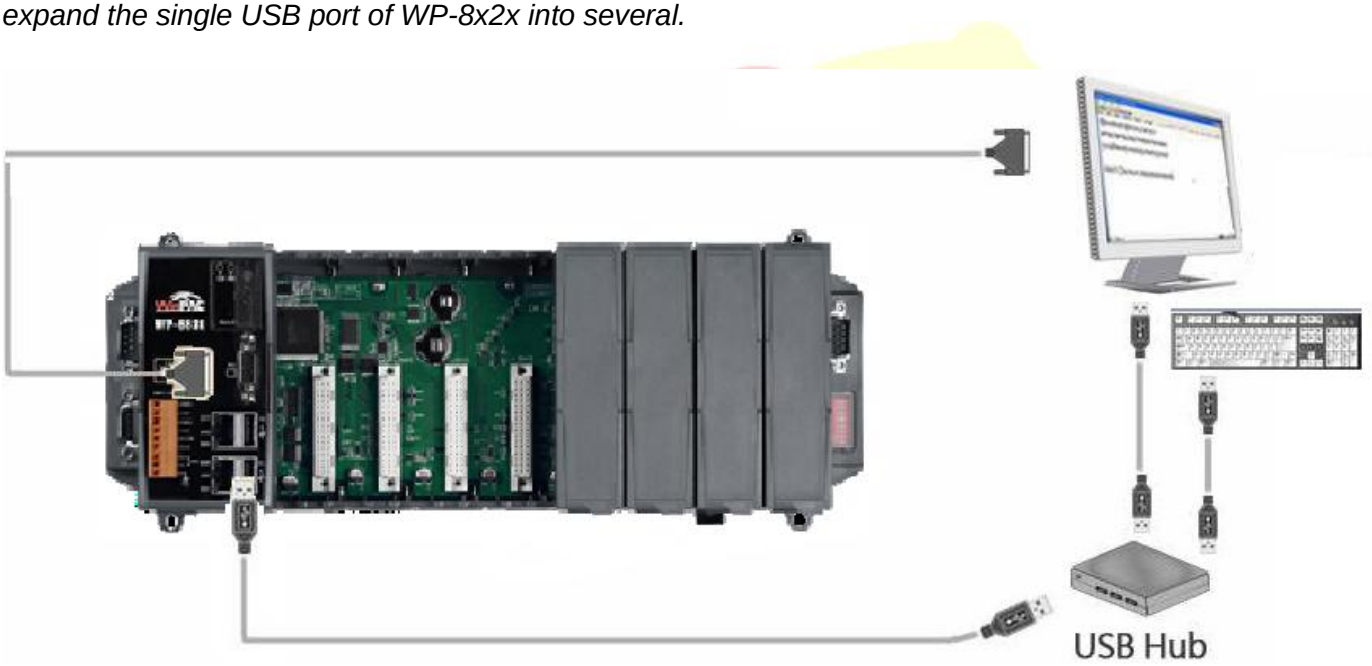

To use a Penmount USB touch panel, perform the following steps:

Step 1: Locate the driver.


The **PenMount_USB_TOUCH_V20100526.CAB** is located at

1. **WinPAC file path:** \System_Disk\External_device_driver\
2. CD: \Wp-5231\System_Disk\External_device_driver\
3. http://ftp.icpdas.com/pub/cd/winpac_am335x/wp-5231/system_disk/external_device_driver/

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Step 2: Install the driver.


2.1. Double click the **PenMount_USB_TOUCH_V20100526.CAB** file, and then click "**OK**".

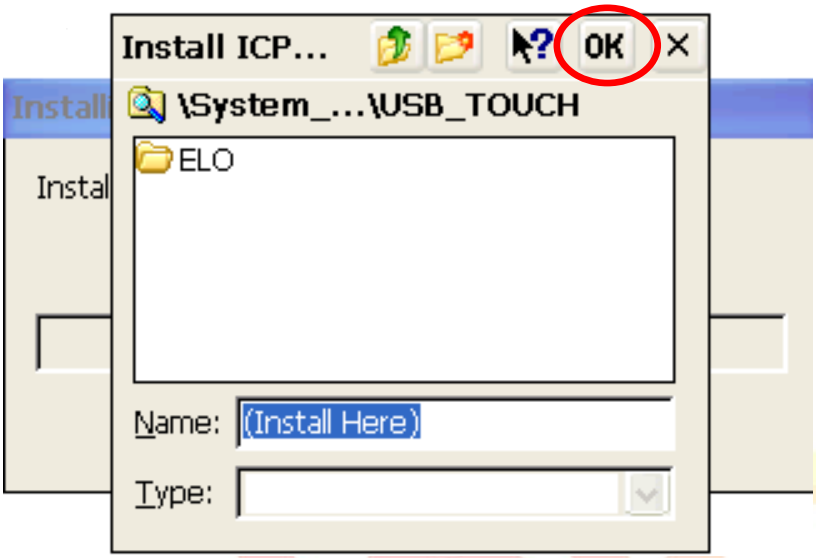

Step 3: Reboot your WinPAC.

3.1. Start the PAC utility on the desktop and click the "**File**" → "**Reboot**".

3.2. Click the "**Yes**" button on the warning window and wait for reboot.

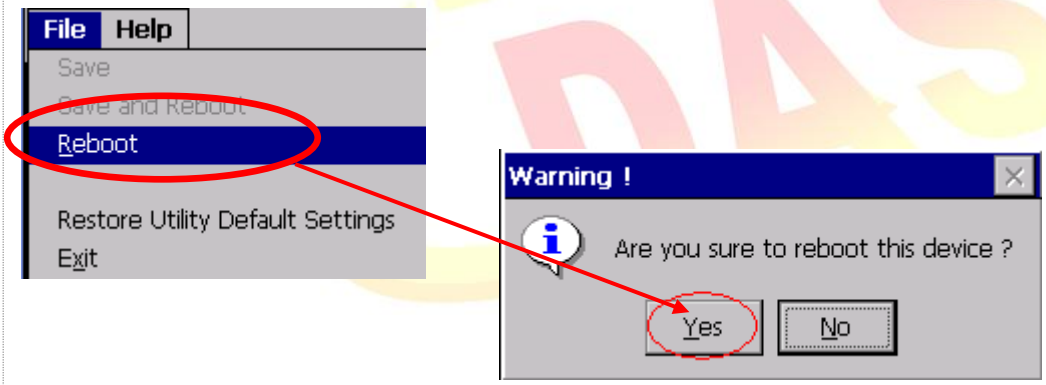


Step 4: Calibrate the touch panel.

4.1. After rebooting, click My Device →System_Disk→Drivers→ USB_TOUCH → PenMount →LNK→ Calibration.




Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

4.2. Click the “4 Points” button.
(Pressing “9 Points” or “16 Points” button could process a more accurate calibration)

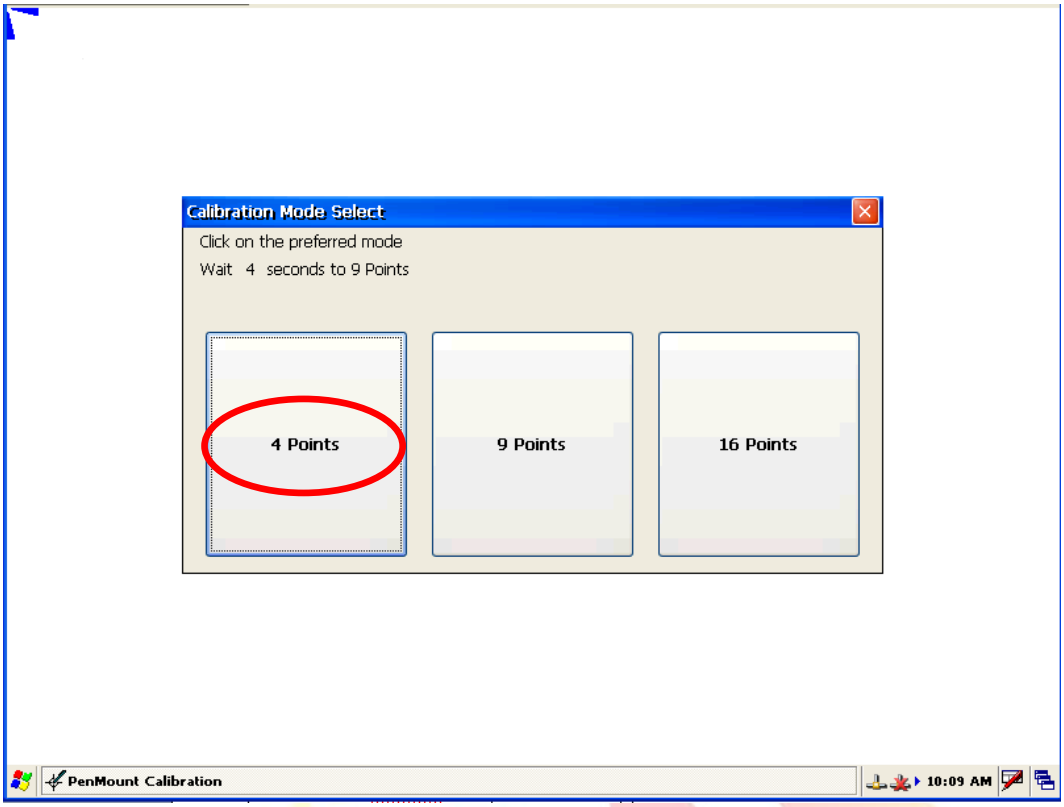

4.3. Touch the “ ” icons on the monitor one by one to perform the calibration process.

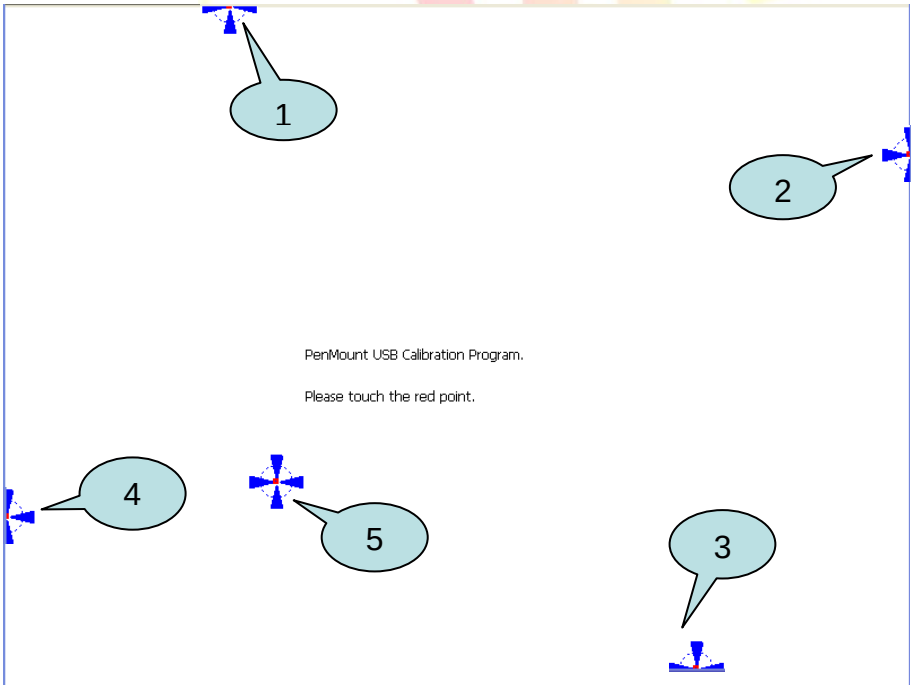


LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Step 5: Save the settings.

5.1. Start the PAC utility and click the "**File**" → "**Reboot**" menu option.

5.2. Click the "**Yes**" button and wait for reboot.

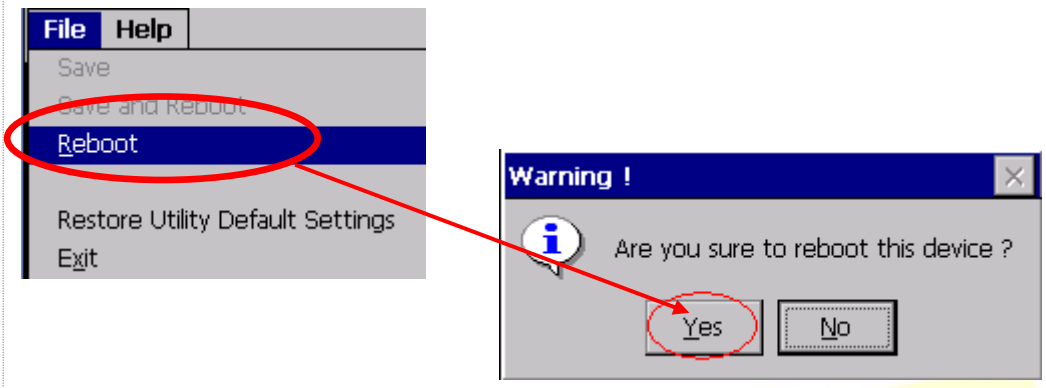

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000