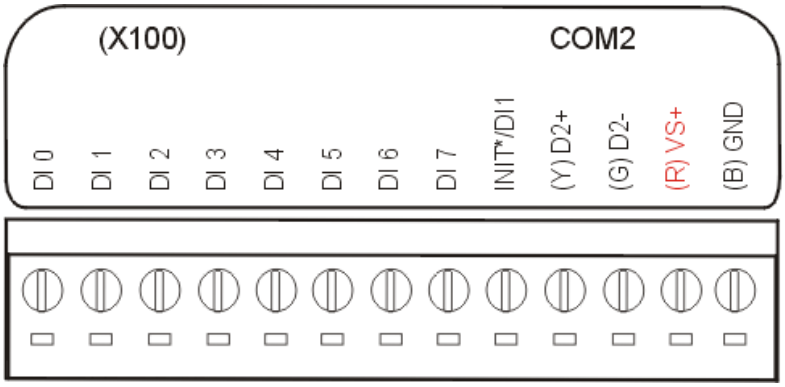
X100 Release Note:

Supported Products: I-7188XC

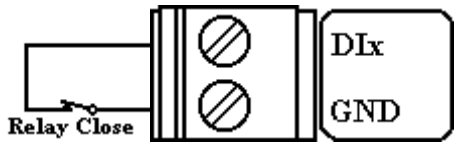
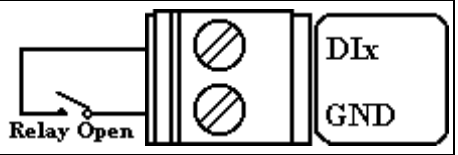
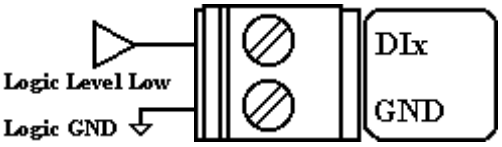
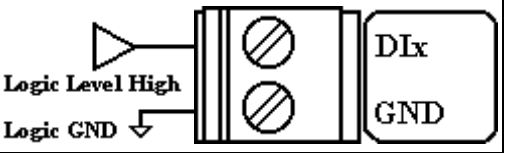
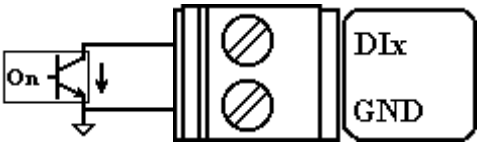
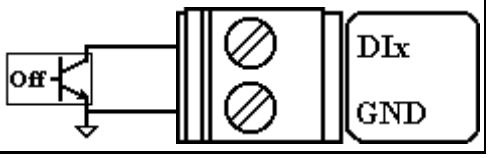
Specifications:

Digital Input	
Channel	8
Contact	Dry
On Voltage Level	+3.5 VDC ~ +30 VDC
Off Voltage Level	0 ~ +1 VDC
Intra-module Isolation, Field to Logic	non-isolated

Pin Assignment:



Wire Connection:

Input Type	ON State DI value as 0	OFF State DI value as 1
Relay Contact		
TTL/CMOS Logic		
Open Collector		

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Jumper Setting:

Note: user should remove R19, R20, R21, R22 and R23 in the 7188XC first.

- **J1: I/O expansion bus, connect to J1 of 7188XC**
- **J2: I/O expansion bus, connect to J2 of 7188XC**
- **J7: Three channels of 8 DI**
- **TP0: Original function on 7188XC**
- **TP1: Five channels of 8 DI**
- **Jumper: Select TP0 or TP1 function**
  - **TP0: J9 and J8 closed**
  - **TP1: J9 and J10 closed**

Programming:

for I-7188XC

http://ftp.icpdas.com/pub/cd/8000cd/napdos/7188xabc/7188xc/demo/bc_tc/xboard/

Manual:

http://ftp.icpdas.com/pub/cd/8000cd/napdos/xboard/document/

Technical Service:

service@icpdas.com

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000