

PISO-P32A32U/PISO-P32A32U-5V

Universal PCI, 32-ch Optical Isolated DI and 32-ch Open Collector Isolated (Source, PNP) DO Board

Features

- Universal PCI (3.3 V/5 V) Interface
- 32 Optically-isolated Digital Input Channels
- 32 Optically-isolated Digital Output Channels (Source, PNP)
  - Supports DO Status Readback (Register Level)
- 3750 Vrms Photo-isolation Protection
- Built-in DC/DC Converter with 3000 VDC Isolation
- Supports Card ID (SMD Switch)

Introduction

The PISO-P32A32U/P32A32-5V card features 32 optically-isolated Digital Input channels and 32 optically-isolated Digital Output channels, arranged into four isolated banks.

Each Digital Output channel includes a PNP transistor and an integral suppression diode for the inductive load. Isolated input channels 0 - 15 are allocated to Group A, while channels 16 - 31 are allocated to Group B. Isolated output channels are allocated to Groups C and D. The photocoupler input for the PISO-P32A32-5V can be powered by using either an internal current source or an external power supply, while the input for the PISO-P32A32U operates using an external power supply only.

The PISO-P32A32U/P32A32-5V cards also include an onboard Card ID switch that enables the board to be recognized via software if two or more boards are installed in the same computer.

The PISO-P32A32-5V uses lower input impedance that is suitable for 5 V signal applications, while the PISO-P32A32U uses higher input impedance that is suitable for 12 or 24 V signal applications and produces less heat.

Applications

- Factory automation
- Product test
- Laboratory automation

Software

Drivers

- [x] 32/64-bit Windows 10/11
- [x] Linux
- [x] DASYLab

Sample Programs

- [x] DOS Lib and TC/BC/MSC Demo
- [x] VB/VC/Delphi/VB.NET/C#.NET/VC.NET/LabVIEW/Python/MATLAB

Hardware Specifications

Model	PISO-P32A32U	PISO-P32A32U-5V
Hardware		
Card ID	Yes (4-bit) for Version 4.0 or above	
Connector	Female DB37 x 1 40-pin box header x 1	
Digital Input		
Channels	32	
Type	Dry + Wet Contact , Photocoupler	Wet Contact Photocoupler
Sink/Source (NPN/PNP)	Sink/Source	
ON Voltage Level	Dry: Close to GND Wet: 9 ~ 24 V (Min. 7 V; Max. 30 V)	Dry: Close to GND Wet: 5 ~ 12 V (Min. 3.5 V; Max. 16 V)
OFF Voltage Level	Dry: Open Wet: 0 ~ 1 V	
Response Speed	4 kHz (Typical)	
Trigger Mode	Static Update	
Isolation	3750 Vrms (Using external power)	
Digital Output		
Channels	32	
Type	Open Emitter	
Sink/Source (NPN/PNP)	Source (PNP)	
Operation Mode	Static Update	
Load Voltage	100 mA/+30 V for each channel @ 100% duty	
Response Speed	4 kHz (Typical)	
Isolation	3750 Vrms	
PC Bus		
Type	3.3 V/5 V Universal PCI, 32-bit, 33 MHz	
Data Bus	8-bit	
Power		
Consumption	600 mA @ +5 V	
Mechanical		
Dimensions (mm)	105 x 180 x 22 (W x L x D)	
Environment		
Operating Temperature	0 ~ +60°C	
Storage Temperature	-20 ~ +70°C	
Humidity	5 ~ 85% RH, Non-condensing	

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000


Ordering Information

PISO-P32A32U CR	Universal PCI, 32-ch Optical Isolated DI and 32-ch Open Collector Isolated (Source, PNP) DO Board (RoHS) Includes one CA-4037B cable and two CA-4002 D-Sub connectors
PISO-P32A32U-5V CR	Universal PCI, 32-ch Optical Isolated DI and 32-ch Open Collector Isolated (Source, PNP) DO Board (RoHS) Includes one CA-4037B cable and two CA-4002 D-Sub connectors

Pin Assignments


Pin Assignment	Terminal No.		Pin Assignment
Ext. GND0	01	20	Ext. GND0
DI_0	02	21	DO_0
DI_1	03	22	DO_1
DI_2	04	23	DO_2
DI_3	05	24	DO_3
DI_4	06	25	DO_4
DI_5	07	26	DO_5
DI_6	08	27	DO_6
DI_7	09	28	DO_7
DI_8	10	29	DO_8
DI_9	11	30	DO_9
DI_10	12	31	DO_10
DI_11	13	32	DO_11
DI_12	14	33	DO_12
DI_13	15	34	DO_13
DI_14	16	35	DO_14
DI_15	17	36	DO_15
ECOM0	18	37	Ext. PWR0
IGND0	19		

CON1




Pin Assignment	Terminal No.		Pin Assignment
Ext. GND1	01	02	Ext. GND1
DI_16	03	04	DO_16
DI_17	05	06	DO_17
DI_18	07	08	DO_18
DI_19	09	10	DO_19
DI_20	11	12	DO_20
DI_21	13	14	DO_21
DI_22	15	16	DO_22
DI_23	17	18	DO_23
DI_24	19	20	DO_24
DI_25	21	22	DO_25
DI_26	23	24	DO_26
DI_27	25	26	DO_27
DI_28	27	28	DO_28
DI_29	29	30	DO_29
DI_30	31	32	DO_30
DI_31	33	34	DO_31
ECOM1	35	36	Ext. PWR1
IGND1	37	38	N/A
N/A	39	40	N/A

CON2



Accessories

 CA-3710 CR	DB-37 Male-Male D-sub cable 1 M (Cable for Daughter Board (45°)) (RoHS)
 CA-3710D CR	DB-37 Male-Male D-sub cable 1 M (Cable for Daughter Board (180°)) (RoHS)
 CA-3715DM-H CR	DB-37 Male-Male Cable, 1.5 M, 180° (RoHS)
 CA-3730DM-H CR	DB-37 Male-Male Cable, 3.0 M, 180° (RoHS)
 CA-3750DM CR	DB-37 Male-Male Cable, 5.0 M, 180° (RoHS)
 CA-3750DM-H CR	DB-37 Male-Male Cable, 5.0 M, 180° (RoHS)
 DB-37 CR	Directly connect signal to D-sub 37-pin connector (RoHS)
 DN-37 CR	DIN Rail Mounting 37-pin Connector (RoHS)

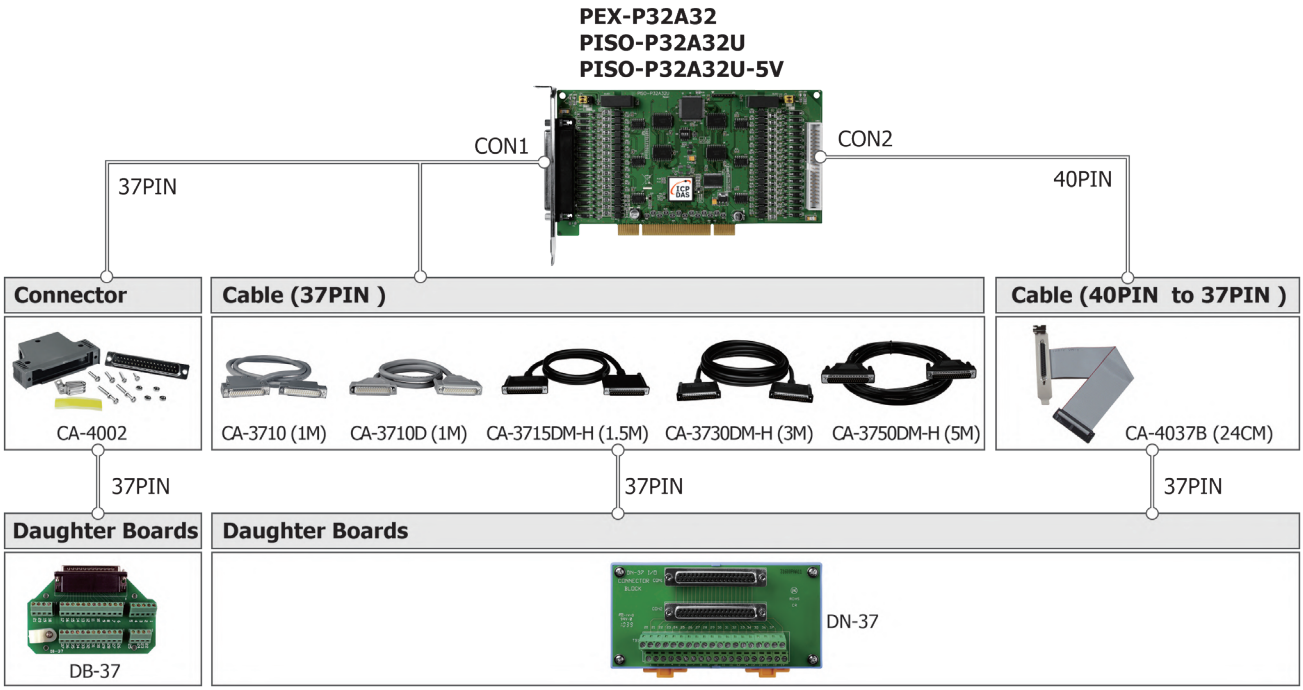

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000