

USB-2514

USB to 4-Port RS-232 Converter

Features

- Hi-Speed USB 2.0 for up to 480 Mbps USB transmission
- Power and data flow indicator for troubleshooting
- Driver Supports Windows 7(32/64-bit)/ 8 (32/64-bit)/10(64-bit)/11(64-bit)/Linux

Introduction


USB-2514 is USB to 4-port RS-232 converter that provides a simple way add up to four RS-232 ports on your PC. The USB-2514 is support USB 1.1, USB 2.0 standards and easy setting RS-232 transmission speed from 300 bps to 921600 bps.

System Specifications


Interface		
USB		Fully Compliant with the USB 1.1/2.0/3.0
RS-232		TxD, RxD, RTS, CTS, DTR, DSR, DCD, RI, GND
Speed		300 bps ~ 921.6 Kbps
Connector	RS-232	DB9 male x 4
	USB	Type B
LED Indicators		
Power/Communication		Yes
Power		
Input Voltage Range		Bus-powered
Power Consumption		4 W
Mechanical		
Casing		Plastic
Dimensions (W x L x H)		31 mm x 116 mm x 147 mm
Environment		
Operating Temperature		-25 °C ~ +75 °C
Storage Temperature		-30 °C ~ +75 °C
Humidity		10 ~ 90% RH, non-condensing

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Applications

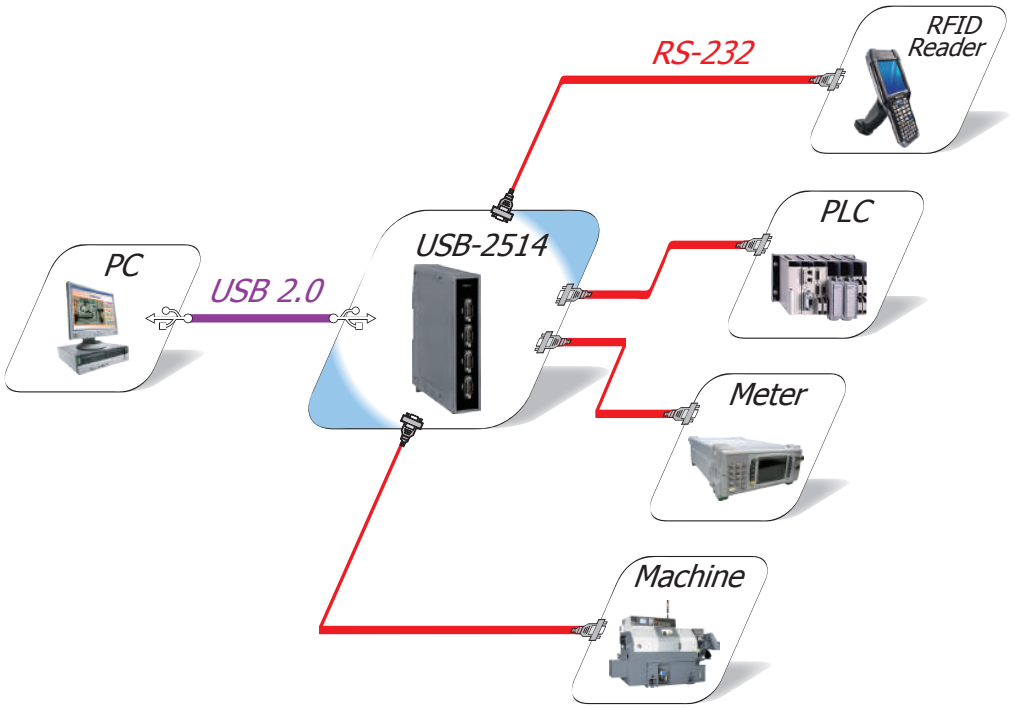

Dimensions (Units: mm)

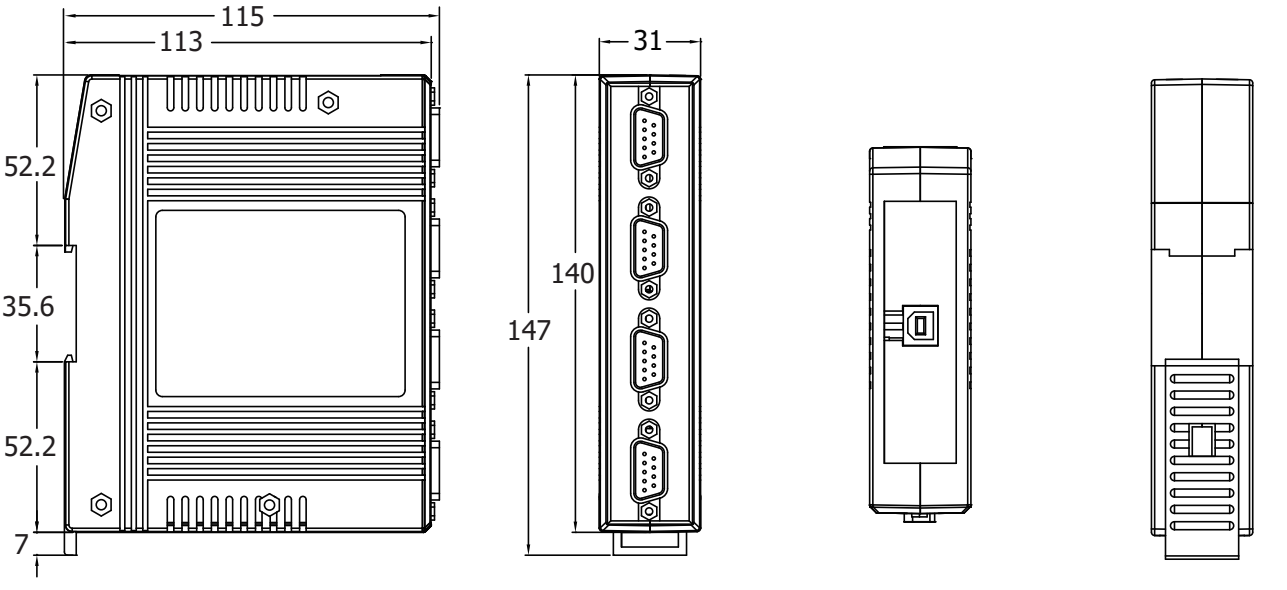

Left Side View | Front View | Top View | Rear View

Ordering Information

USB-2514 CR	USB to 4-Port RS-232 Converter (RoHS) Includes CA-USB18 Cable

Accessories

USB-2560 CR	Industrial 4-port USB 2.0 Hub (RoHS)

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000