
How to download the firmware to the GW-7553 module?

Step 1: Download the newest firmware (7553vxx.exe & autoexec.bat) at


ftp://ftp.icpdas.com.tw/pub/cd/fieldbus_cd/profibus/gateway/gw-7553/firmware/

Step 2: Open the cover of GW-7553

Step 3: Close the initial pin 2, 3 (JP1) and flash protection pin 1, 2 (JP2) by jumper

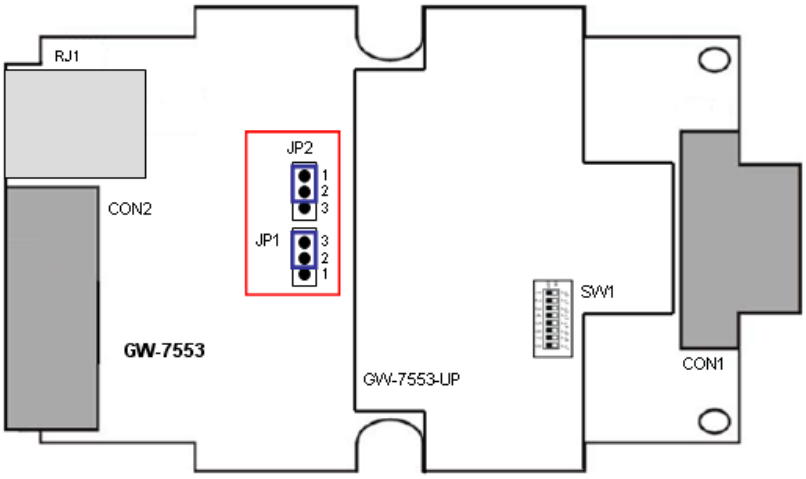

Step 4: Connect the power supply

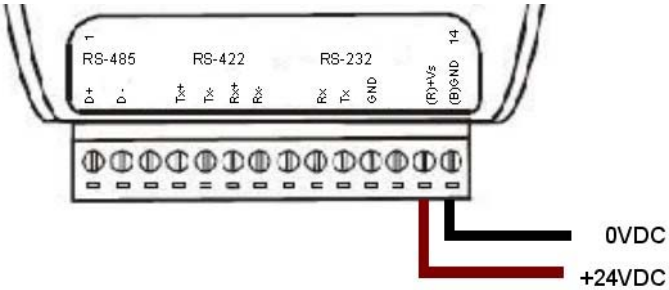

Step 5: Connect the PC and the GW-7553 by Com Port (RS-232)




Step 6: Turn the power on


Step 7: Run MiniOS7 utility in the PC (You can download MiniOS7 Utility at

http://ftp.icpdas.com.tw/pub/cd/8000cd/napdos/minios7/utility/minios7_utility/)

Step 8: Connect MiniOS7 Utility and the GW-7553 by click the connection button.

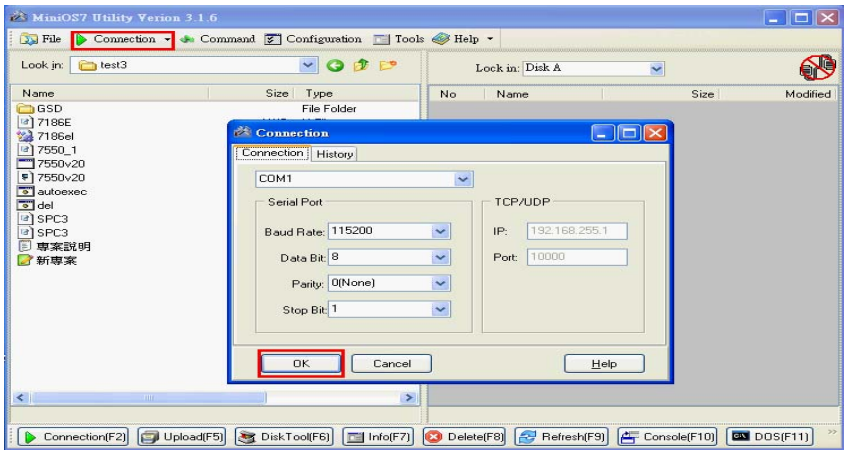


Step 9: Erase 7553vxx.exe & autoexec.bat

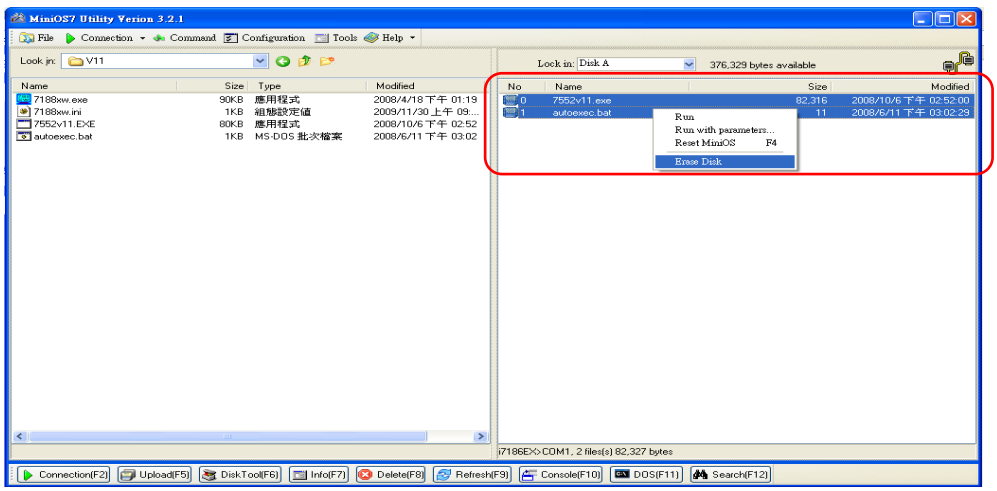


LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Step 10: Select the new firmware (7553vxx.exe) and autoexec.bat and upload

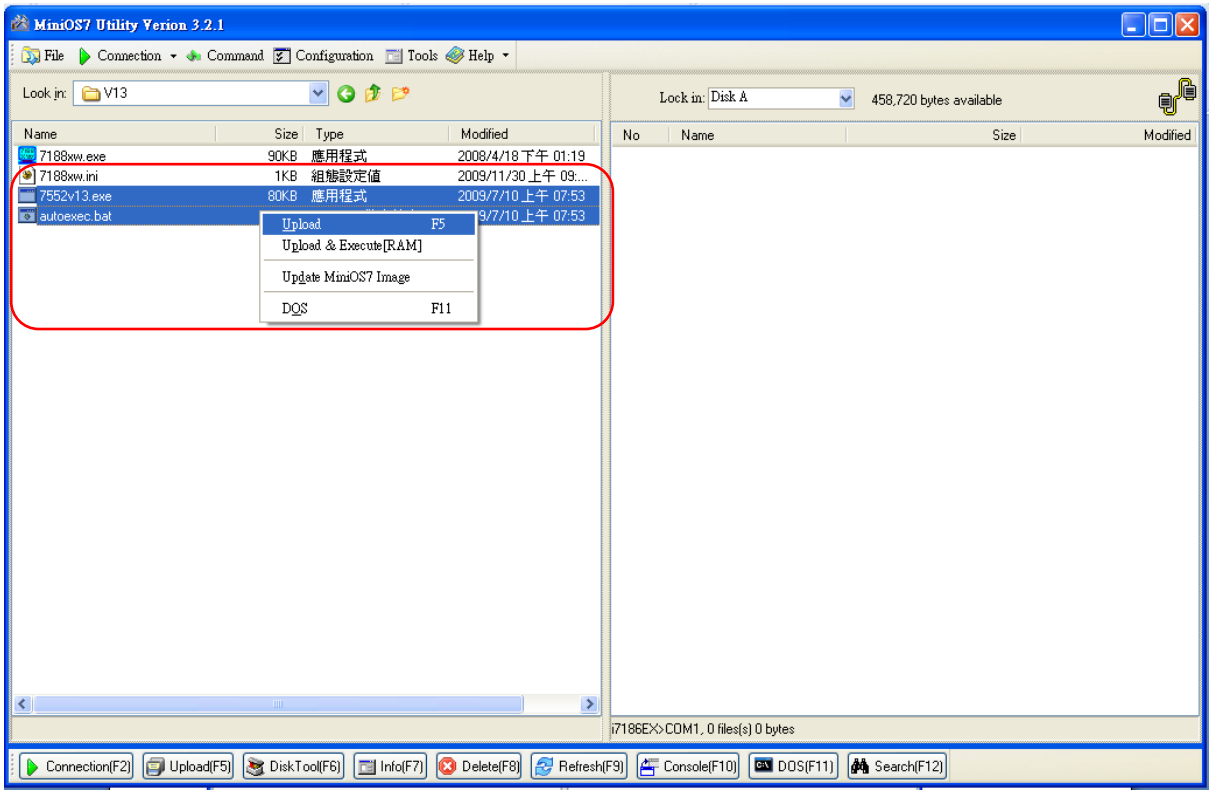


Step 11: Complete download the firmware

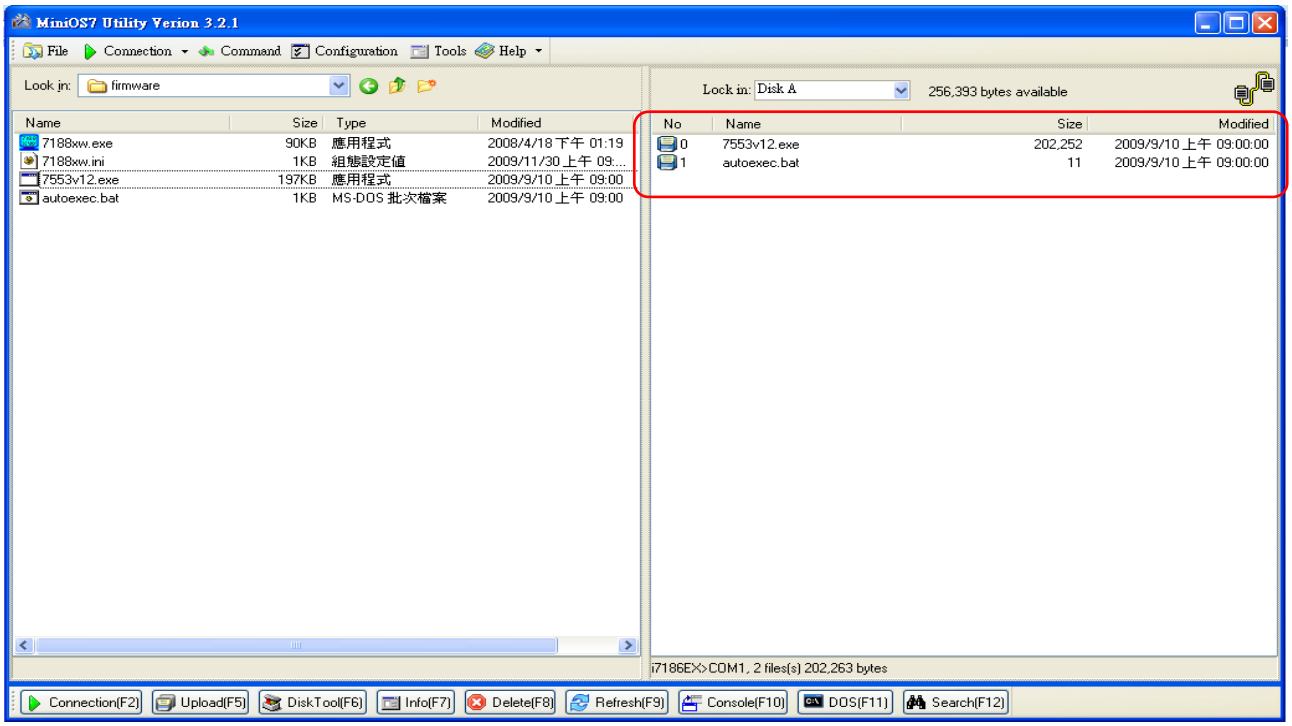

Step 12: Turn the power off

Step 13: Close the initial pin 2, 3 (JP1) and flash protection pin 1, 2 (JP2) by jumper

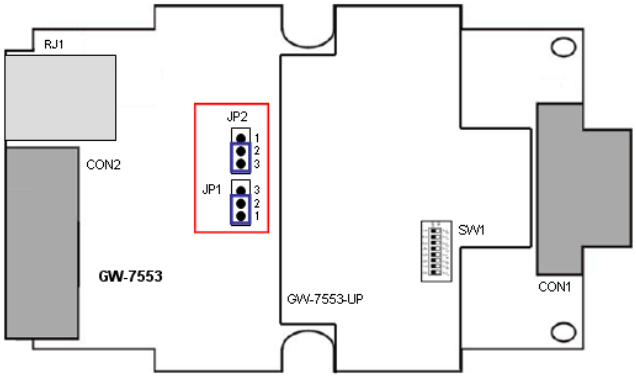

Step 14: Close the cover of GW-7553

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000