How to setup configuration between GW-7662 and SIMATIC TIA portal?


In this example, please follow the step to setup project.

Step 1: Create the project

- Double Click TIA icon to start Step 7 V11




- Create the Project

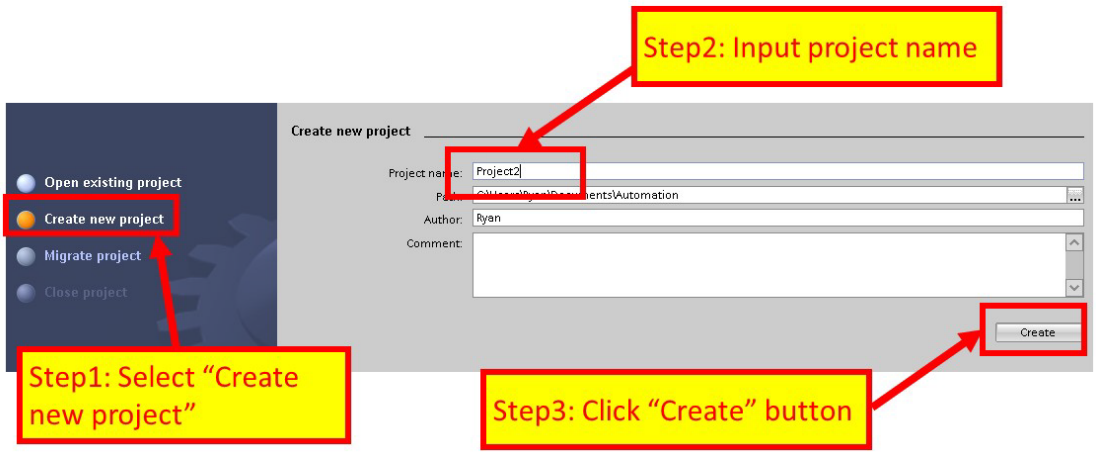


Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000


Step 2: Project configuration

- Add a PLC device

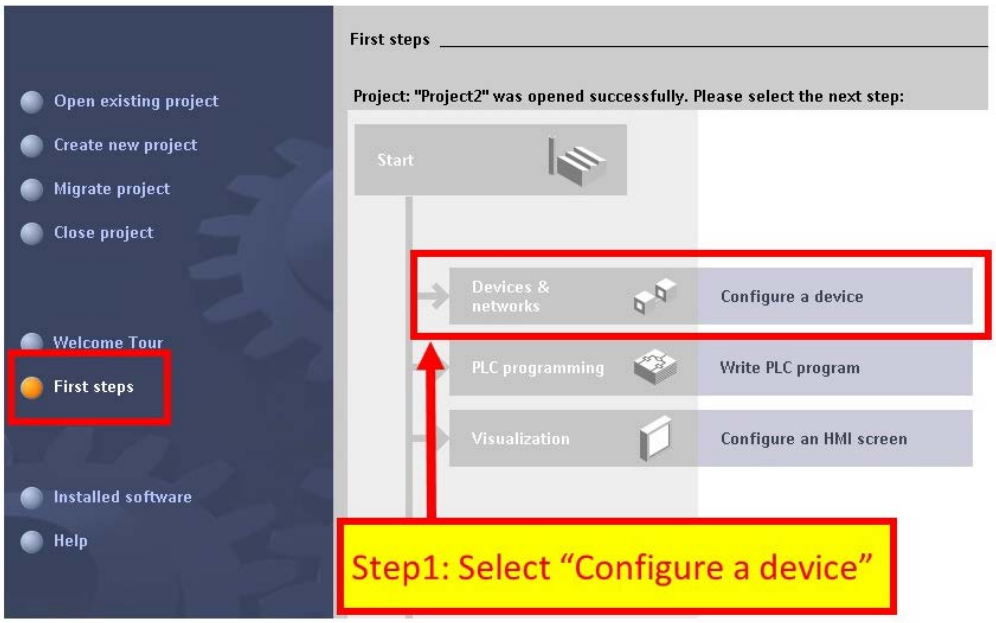


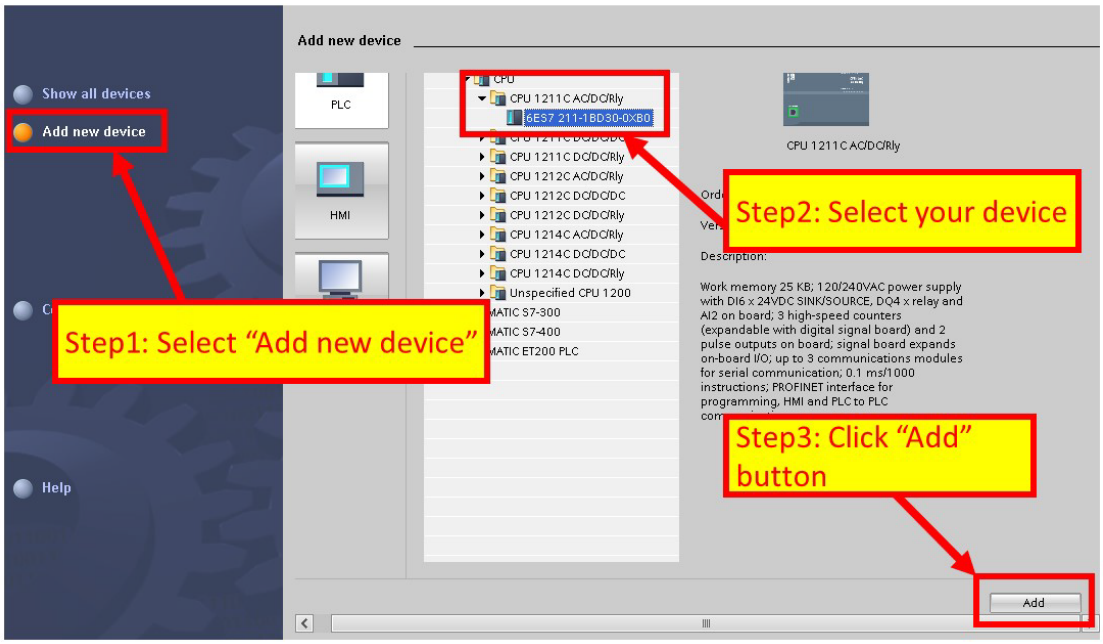

- Set the device name of PLC to “PLC_1”

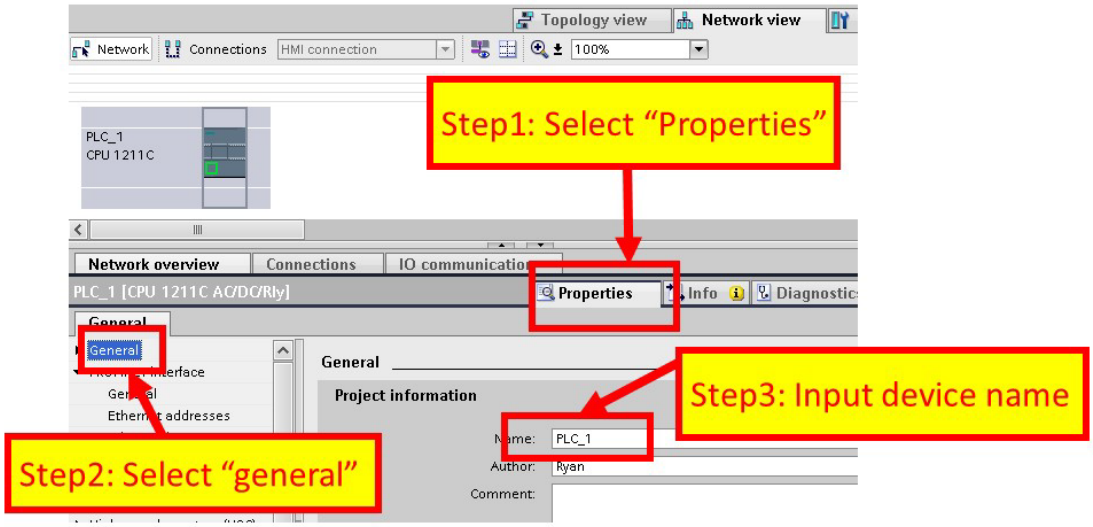


- Set the IP and mask of PLC and add a new subnet

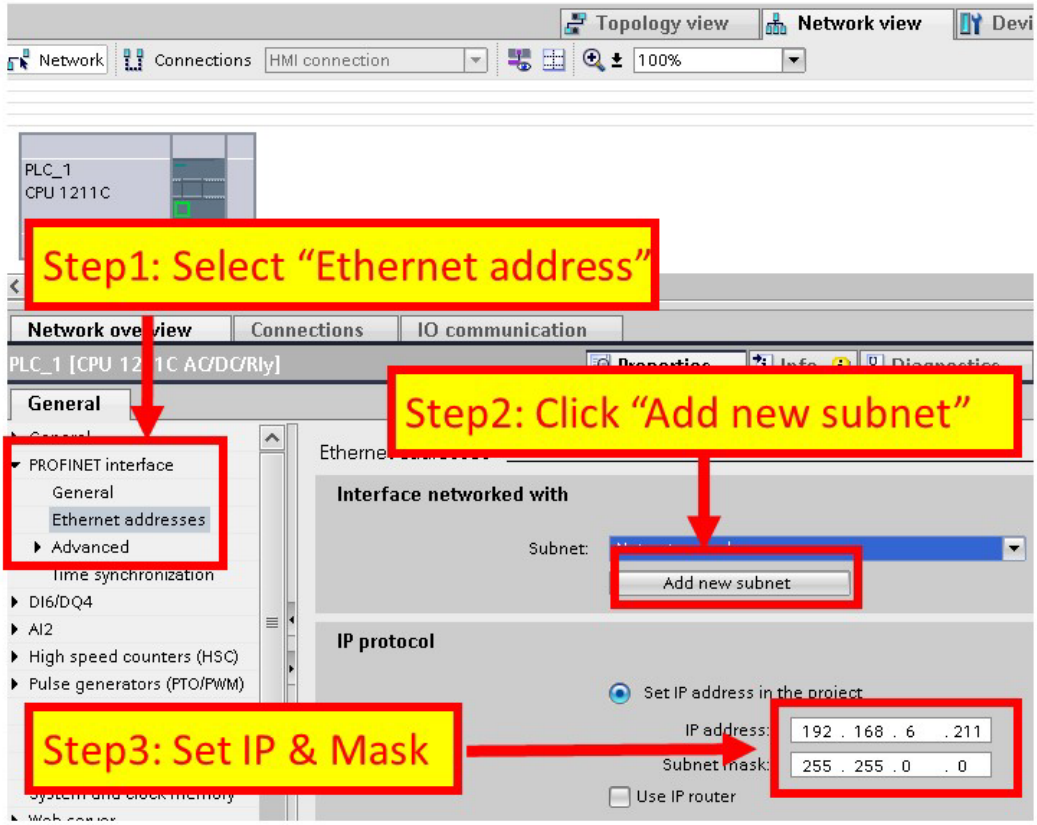


LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000


◆ Add GW-7662 module

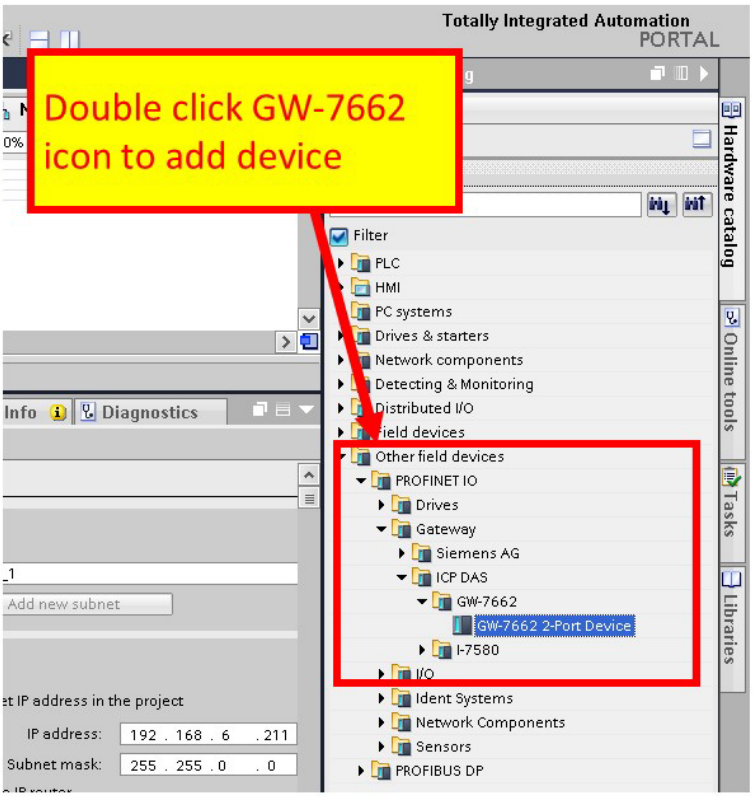


◆ Select PROFINET interface

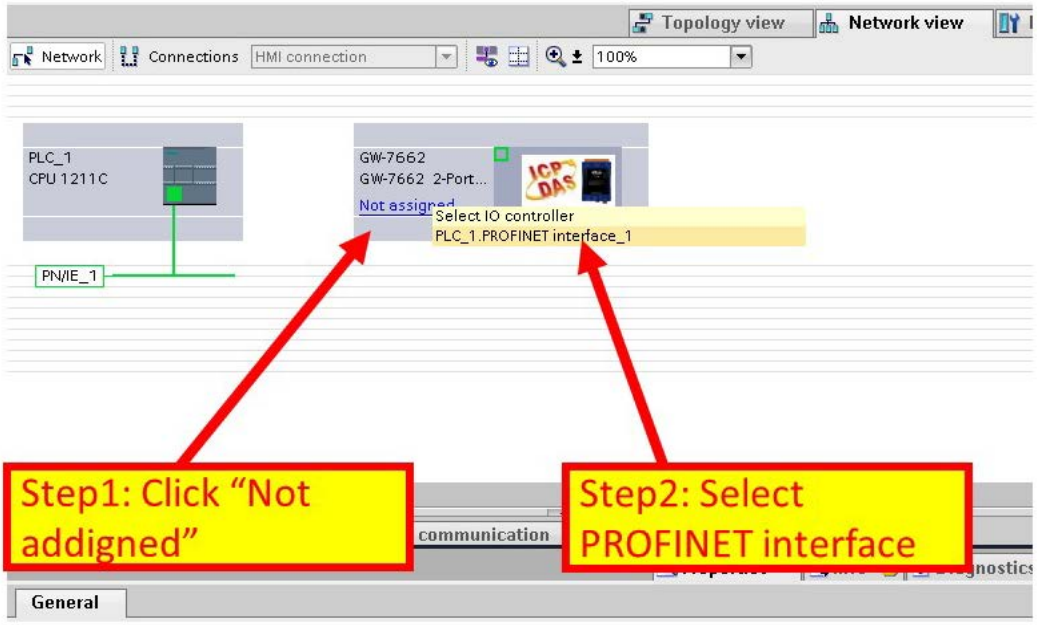


- Set device name to “gw-7662”

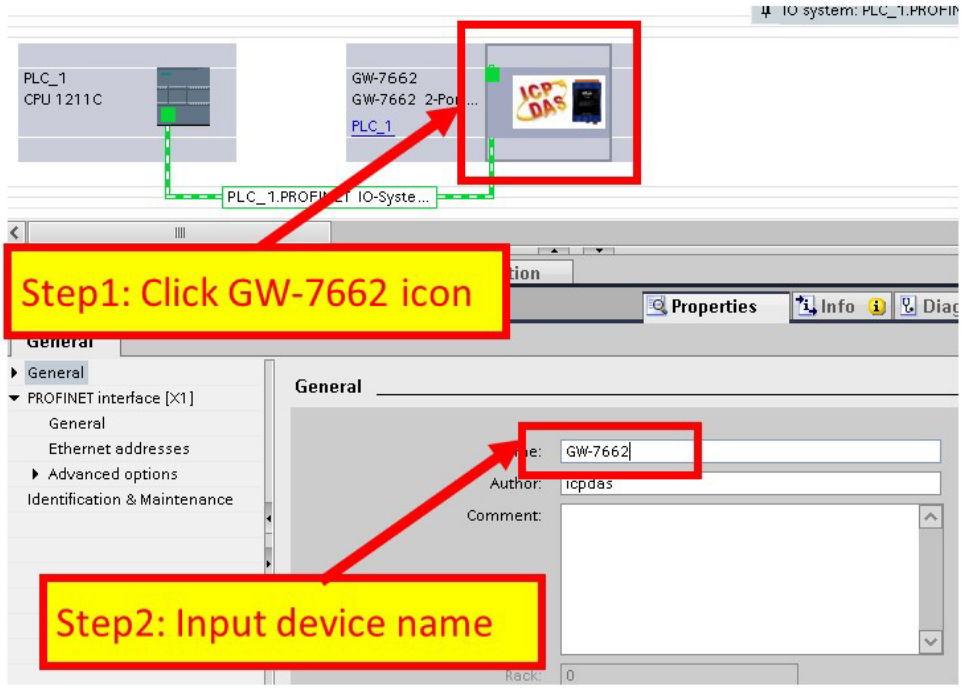


- Set the IP of GW-7662 module

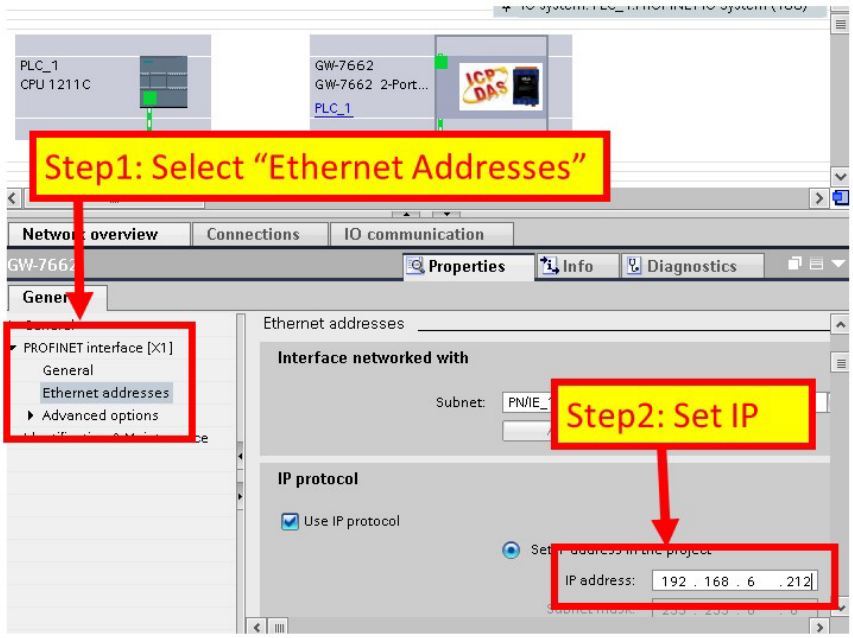



◆ Select module type of GW-7662 module

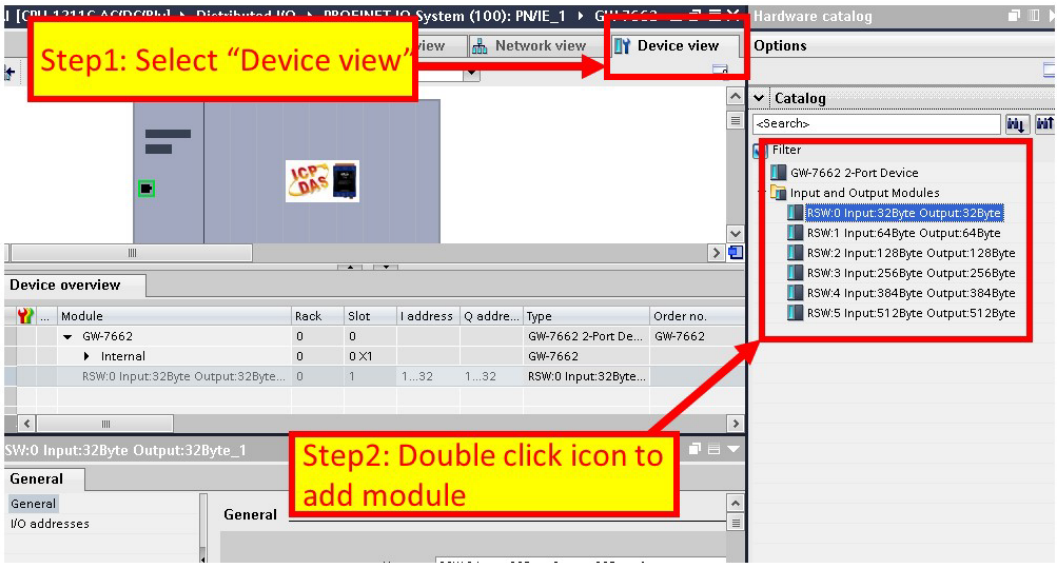


◆ Compile and download to device

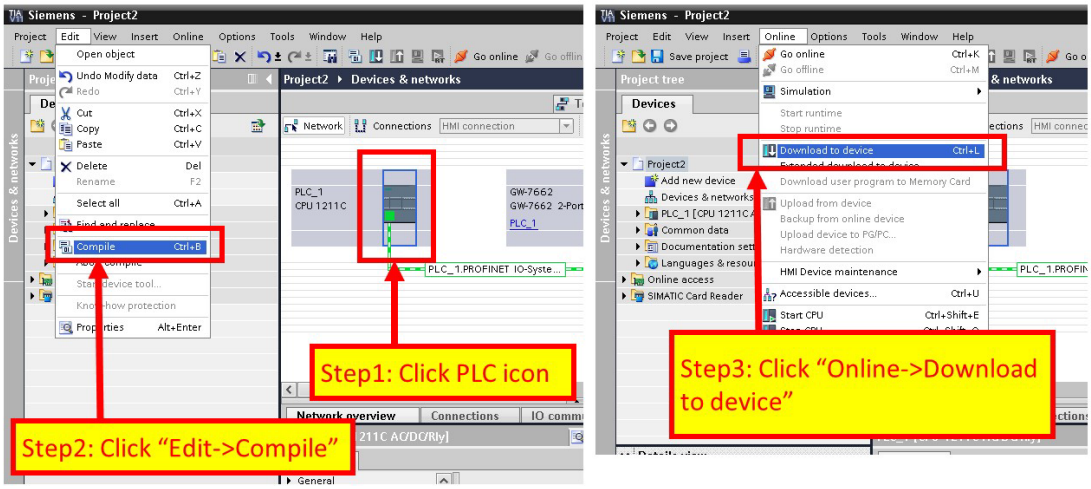


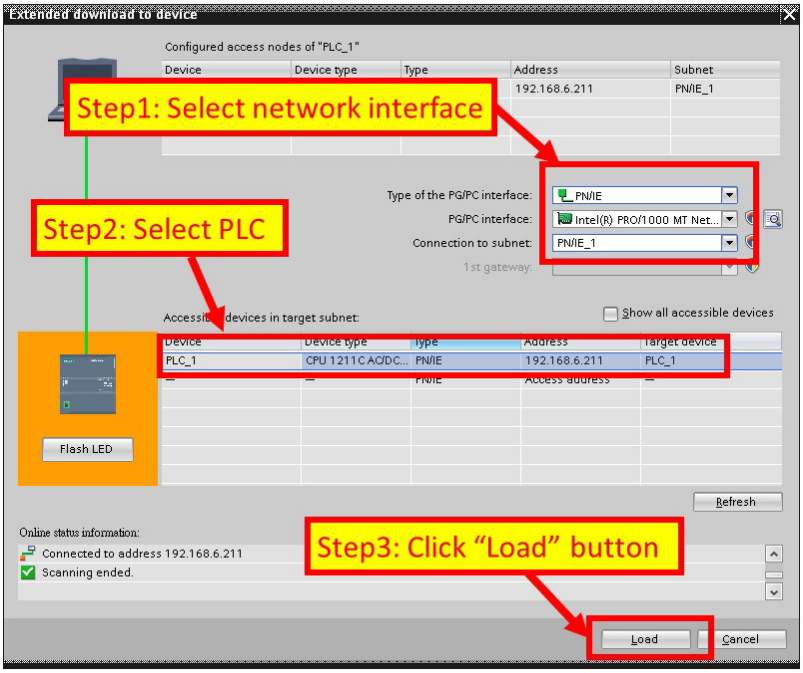

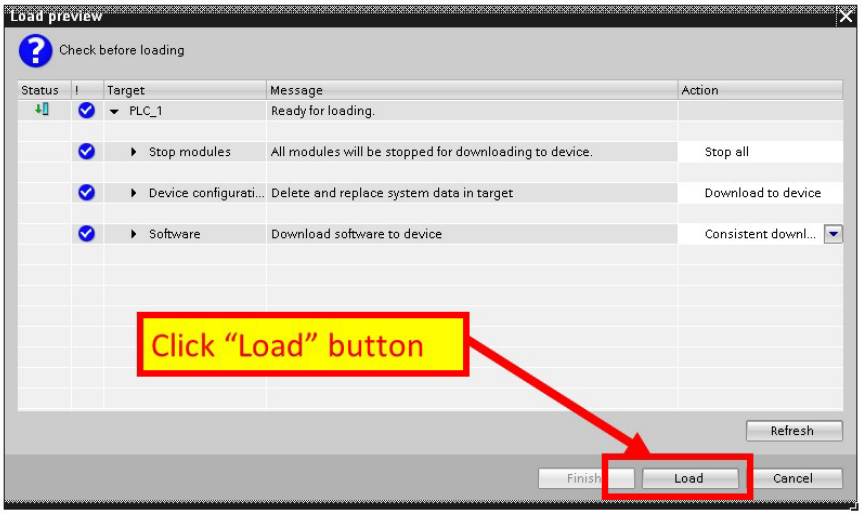


LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

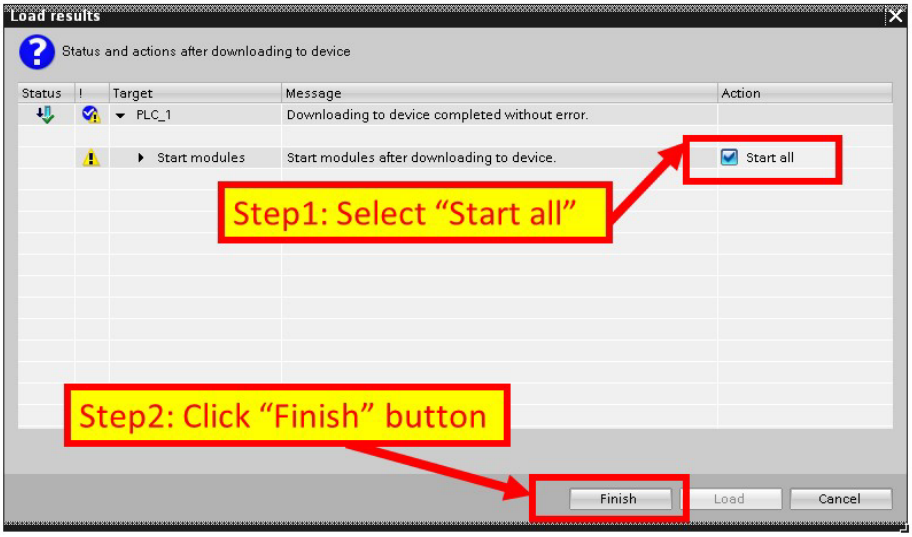

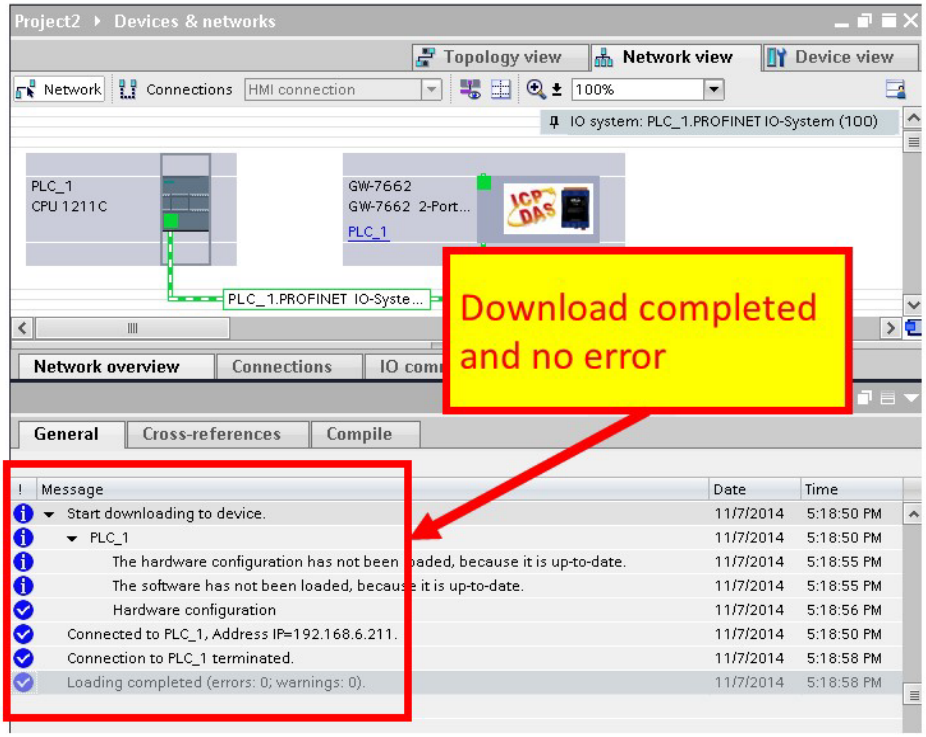

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

At this time, the AP LED should turn on, BOOT LED and ERR LED should turn off, it means the connection between PLC and GW-7662 module is established.

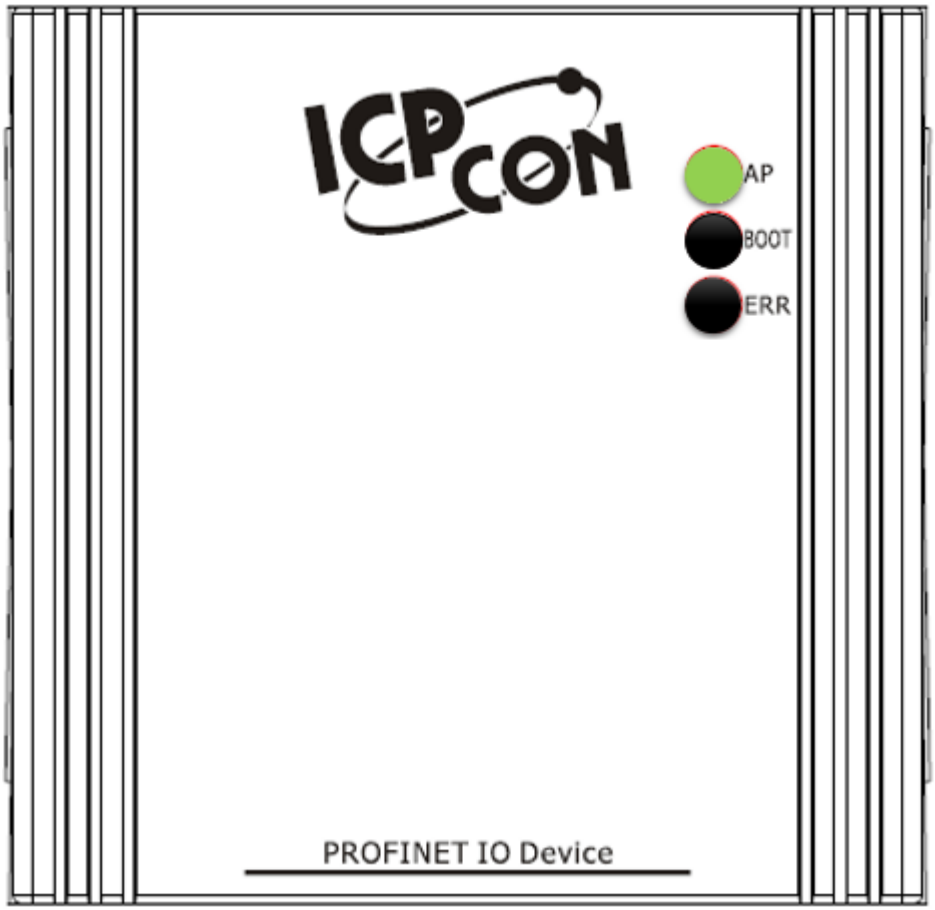

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000