ICP DAS

RMV-762D-MTCP FAQ

FAQ Version 1.00

ICP DAS Co., Ltd.

2022-12-1

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Table of Contents

Q1: How do I know the signal strength of the RMV-762D-MTCP?.....3
Q2: The Wi-Fi signal strength is low. How do I install my Wi-Fi antenna?.....3


Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Q1: How do I know the signal strength of the RMV-762D-MTCP?

A1: The signal strength can be show on the 7-seg LED when the RMV-762D-MTCP is set in the infrastructure mode. The RSSI value is shown when the Wi-Fi connection is established. The value is refresh when the data stop exchanging on Wi-Fi.

Q2: The Wi-Fi signal strength is low. How do I install my Wi-Fi antenna?

A2: The Wi-Fi antenna should be installed parallel.

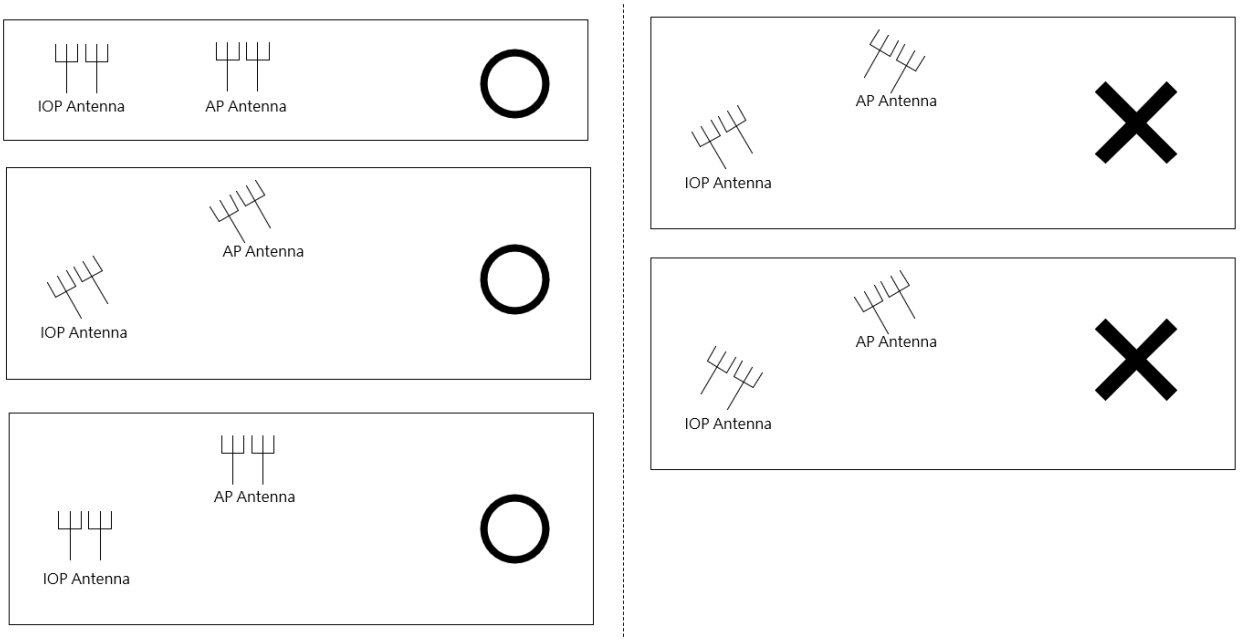

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000