
X000 Release Note:

Supported Products: I-7188XC

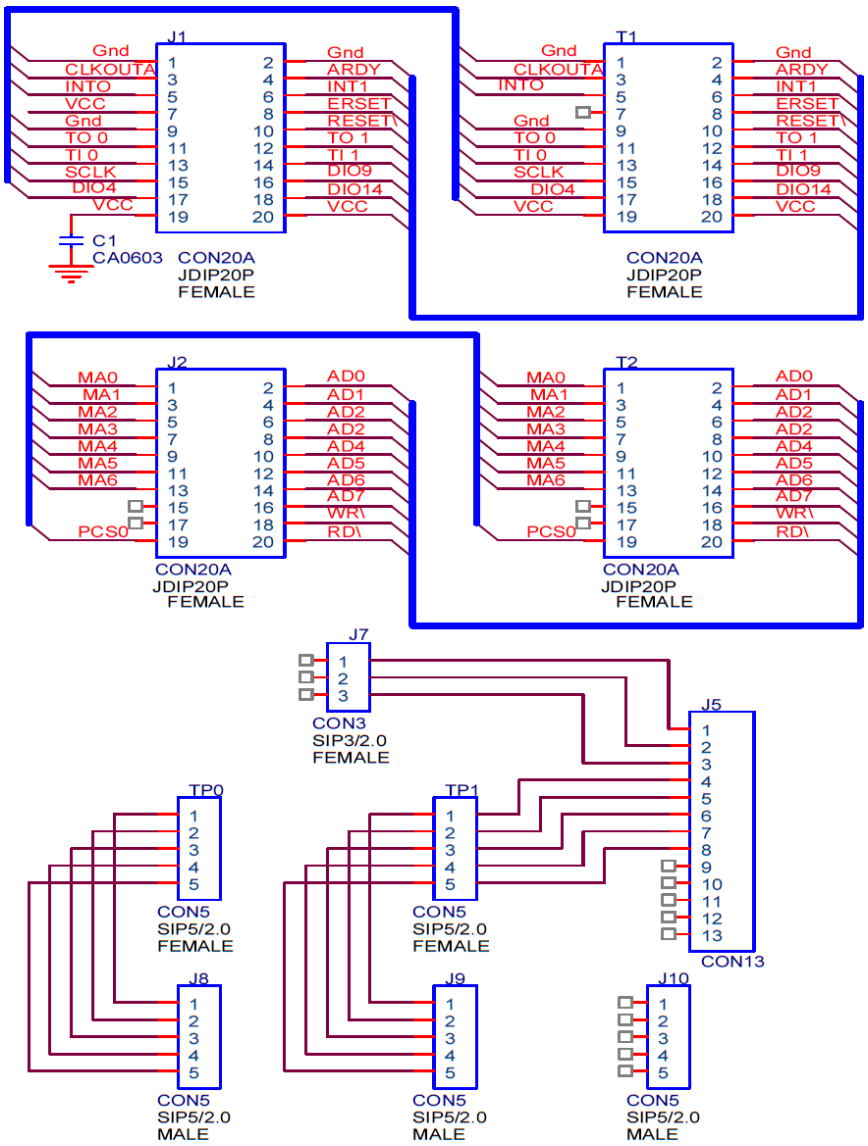

Jumper Setting:

Note: user should remove R19, R20, R21, R22 and R23 in the 7188XC first.

- **J1: I/O expansion bus, connect to J1 of 7188XC**
- **J2: I/O expansion bus, connect to J2 of 7188XC**
- **J7: 3 user defined Pins via X-board**
- **TP0: Original function on 7188XC**
- **TP1: 5 user defined Pins via X-board**
- **Daughter Board: JP9, JP10 (close)**
- **On Board: JP8, JP9 (close)**

Manual:

http://ftp.icpdas.com/pub/cd/8000cd/napdos/xboard/document/

Technical Service:

service@icpdas.com

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000