
X502 Release Note:

Supported Products: I-7188XC

Specifications:


Serial Port	
Number of port	RS-232 x 2
Interface	COM3 : TxD, RxD, RTS, CTS, GND COM4 : TxD, RxD, GND
Controller	16C550 compatible
	Speed: 115200 bps Max.
	Data bit : 5, 6, 7, 8
	Stop bit : 1, 1.5, 2
	Parity : None, Even, Odd, Mark, Space
	FIFO: Internal 16 bytes for each port
Intra-module Isolation, Field to Logic	non-isolated


Pin Assignment:

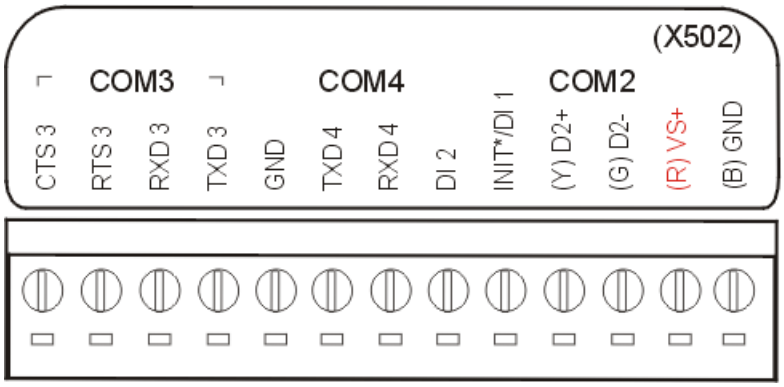

Jumper Setting:

Note: user should remove R19, R20, R21 and R22 in the 7188XC first.

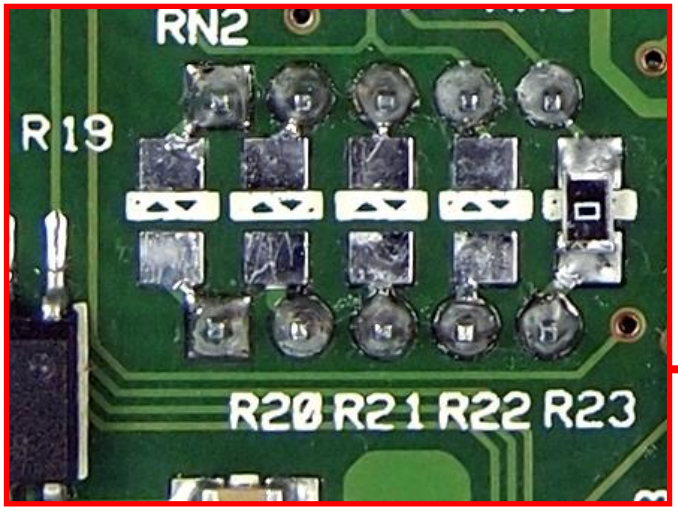

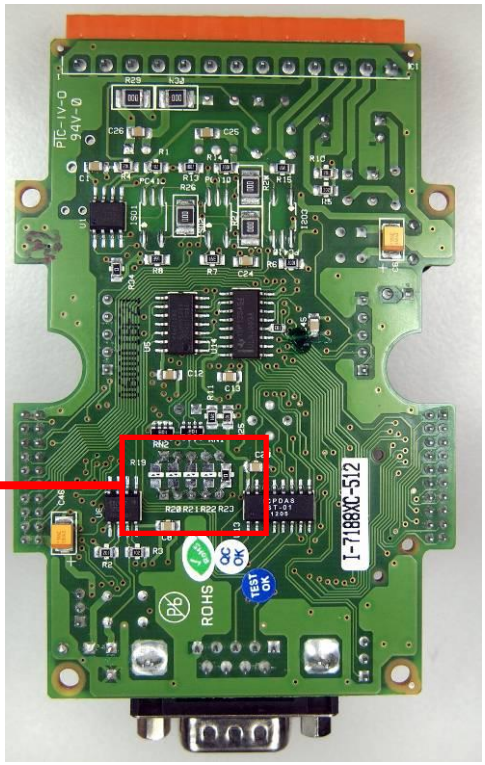

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

- **J1: I/O expansion bus, connect to J1 of 7188XC**
- **J2: I/O expansion bus, connect to J2 of 7188XC**
- **J7: CTS, RTS, RxD of COM3**
- **TP0: Original function on 7188XC**
- **TP1: TxD, RxD of COM4**

Programming:

for I-7188XC

http://ftp.icpdas.com/pub/cd/8000cd/napdos/7188xabc/7188xc/demo/bc_tc/xboard/

Manual:

http://ftp.icpdas.com/pub/cd/8000cd/napdos/xboard/document/

Technical Service:

service@icpdas.com

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000