# X506 Release Note:


## Supported Products:

I-7188XB/XG/EX/EG, µPAC-7186EX/EG/EX-FD/EX-SM, µPAC-7186PEX

## Specifications:

| Serial Port | |
|---|---|
| Number of port | RS-232 x 6 |
| Interface | TxD, RxD, GND |
| Controller | 16C550 compatible |
| | Speed: 115200 bps Max. |
| | Data bit : 5, 6, 7, 8 |
| | Stop bit : 1, 1.5, 2 |
| | Parity : None, Even, Odd, Mark, Space |
| | FIFO: Internal 16 bytes for each port |
| Intra-module Isolation, Field to Logic | non-isolated |

## Pin Assignment:

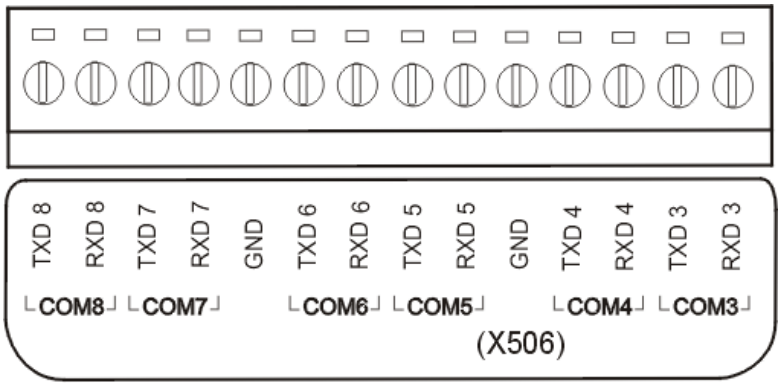


## Programming:

### for I-7188XB

http://ftp.icpdas.com/pub/cd/8000cd/napdos/7188xabc/7188XB/Demo/BC_TC/Xboard/

### for I-7188EX

http://ftp.icpdas.com/pub/cd/8000cd/napdos/7188e/demo/bc_tc/xboard/

### for µPAC-7186EX

http://ftp.icpdas.com/pub/cd/8000cd/napdos/7186e/demo/basic/bc_tc/xboard/

### for I-7188XG/I-7188EG (manual, Driver, Demo)

http://ftp.icpdas.com/pub/cd/8000cd/napdos/isagraf/

## Manual:

http://ftp.icpdas.com/pub/cd/8000cd/napdos/xboard/document/

## Technical Service:

service@icpdas.com



LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000