CAN-2057C/D-32 Quick Start

v1.10, June 2026

Packing List

In addition to this guide, the package includes the following items:



CAN-2057C/D-32



Screw Driver

Technical Support

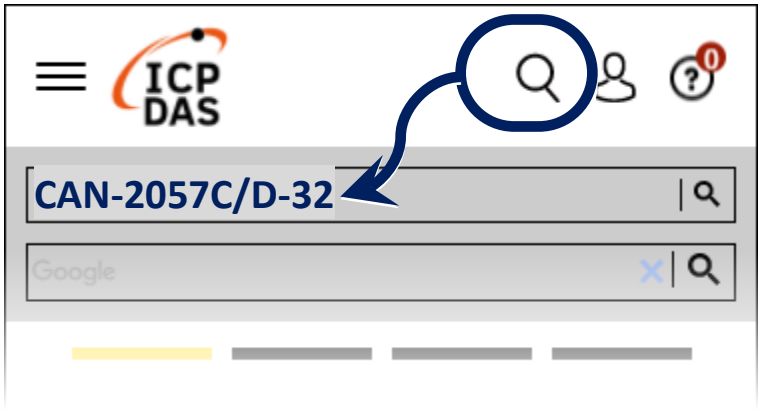
service@icpdas.com

www.icpdas.com


Resources

How to search for drivers, manuals and spec information on ICP DAS website.

- For Mobile Web




- For Desktop Web

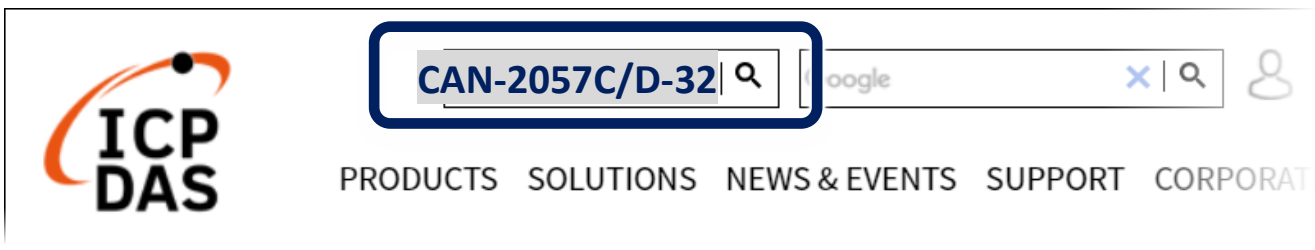

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

1 Node ID, baud rate and terminal resistance




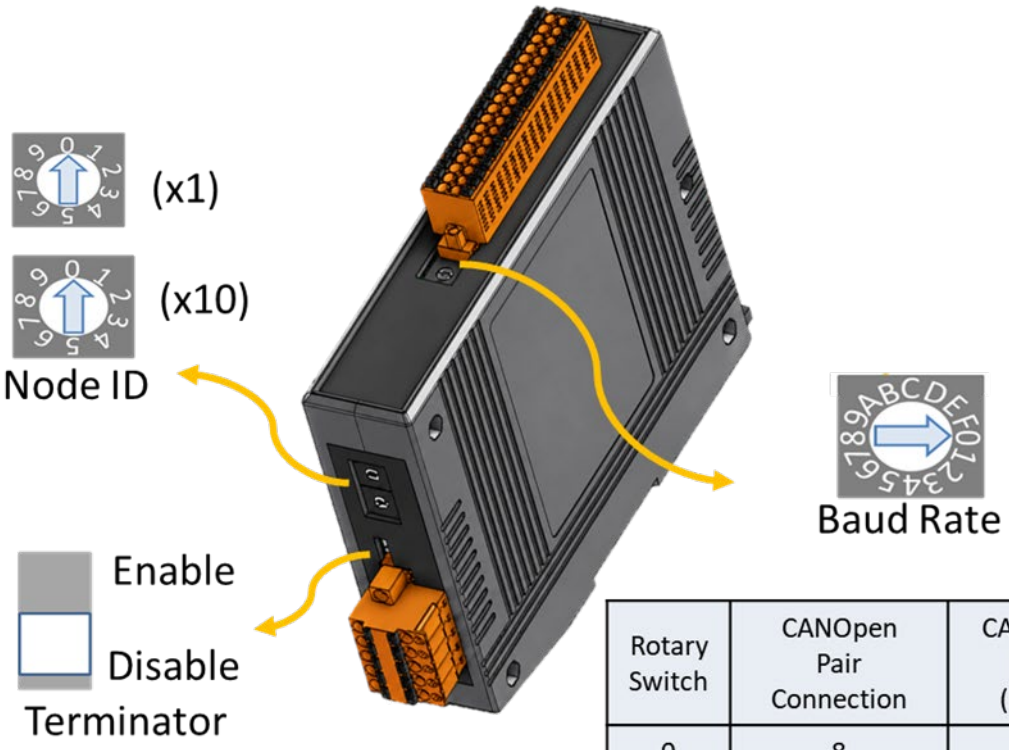
According to the user's requirements for CANopen/DeviceNet network, set the node ID and CAN baud rate of this module on the CANopen/DeviceNet network. If the module is located at the terminal of the network, according to the standard CANopen/DeviceNet network specification, this module must enable the terminator resistance.







Rotary Switch	CANOpen Pair Connection	CANOpen Baud (k bps)	DeviceNet Baud (k bps)
0	8	10	125
1	9	20	250
2	A	50	500
3	B	125	-
4	C	250	-
5	D	500	-
6	E	800	-
7	F	1000	-

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

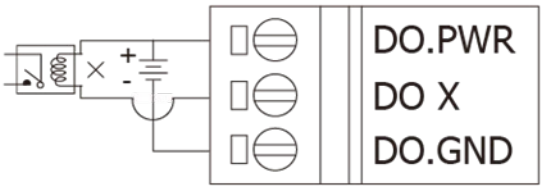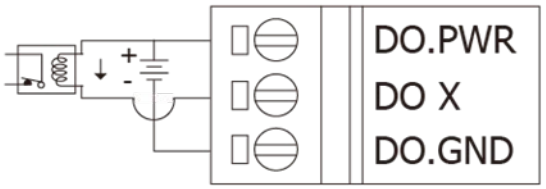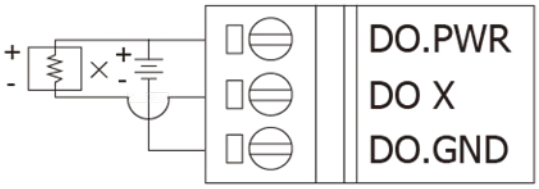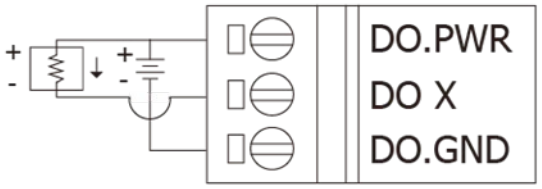2 I/O channel connection


Module Name	CAN-2057C-32	
Output Type	ON State LED ON Readback as 1	OFF State LED OFF Readback as 0
Drive Relay	Relay Off	Relay ON
		
Resistance Load		

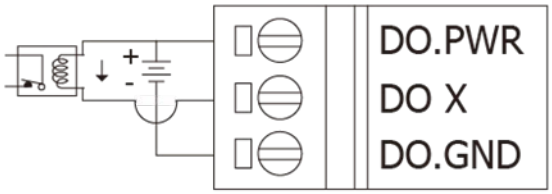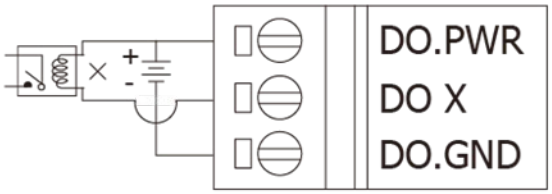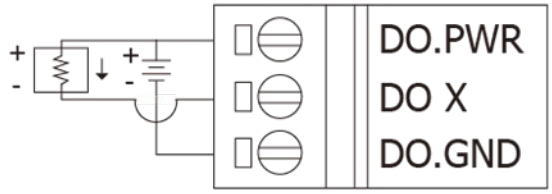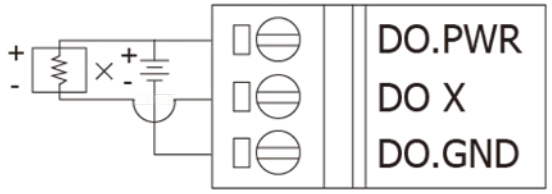Module Name	CAN-2057D-32	
Output Type	ON State LED ON Readback as 1	OFF State LED OFF Readback as 0
Drive Relay	Relay ON	Relay Off
		
Resistance Load		


Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

3 CAN port connection

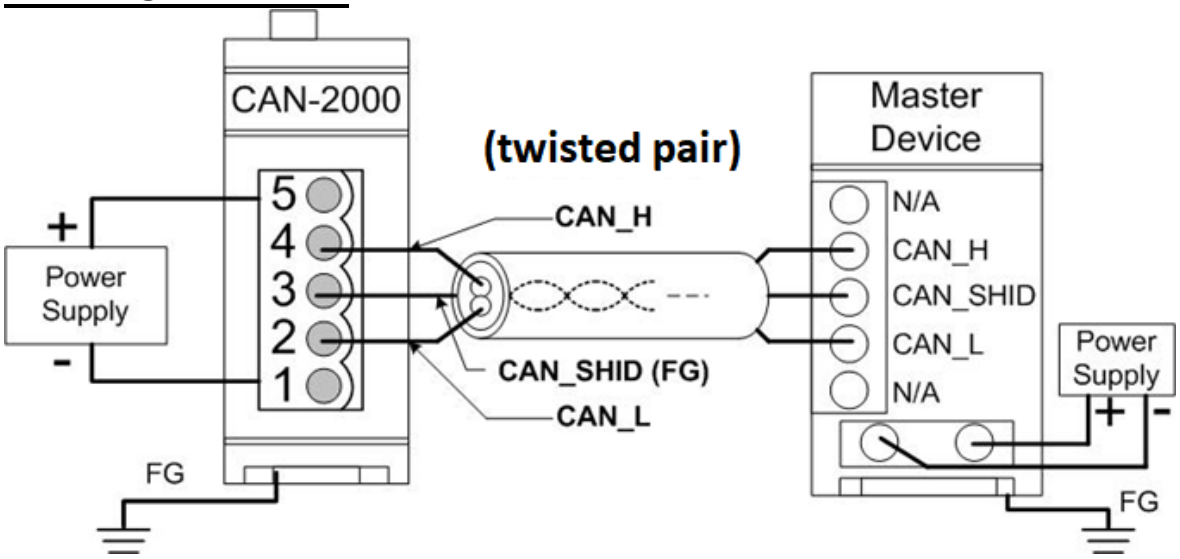
2-wire Connection



3-wire Connection

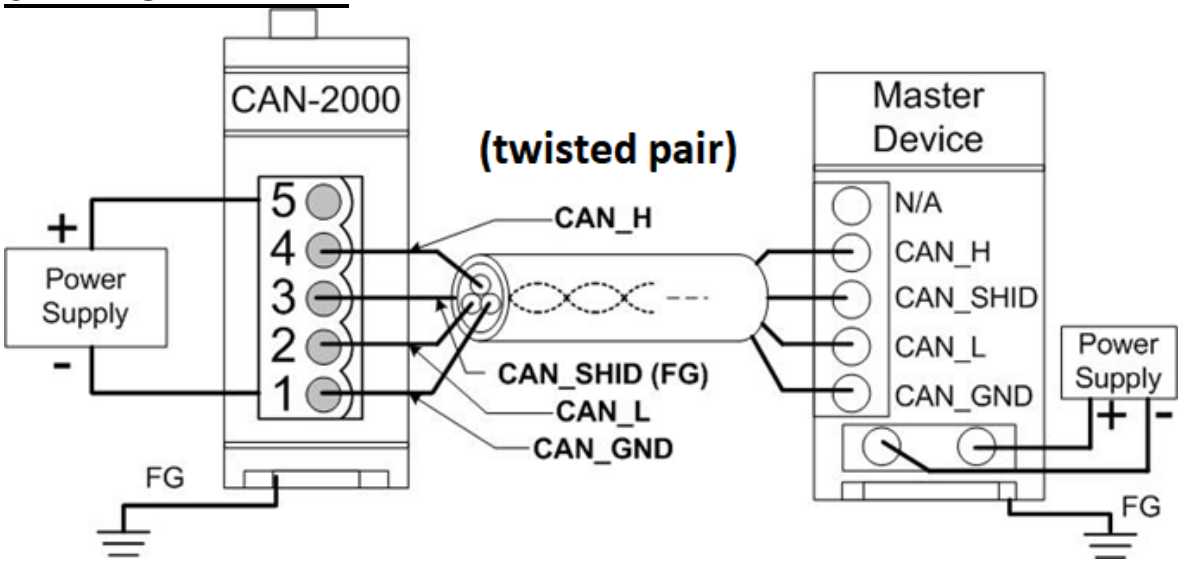

4-wire Connection

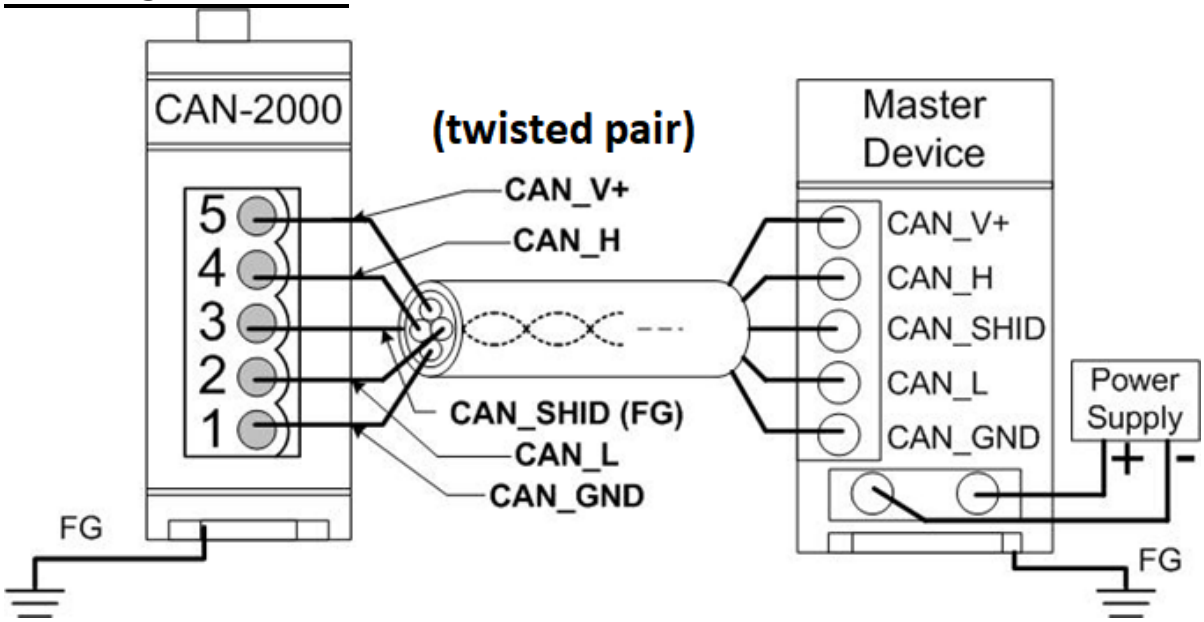

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000