GW-2492M/GW-2493M Quick Start

v1.0, December 2021

Packing List

In addition to this guide, the package includes the following items:



GW-2492/3M



Screw Driver (1C016)

Technical Support


service@icpdas.com

www.icpdas.com

Resources

How to search for drivers, manuals and spec information on ICP DAS website.

- For Mobile Web

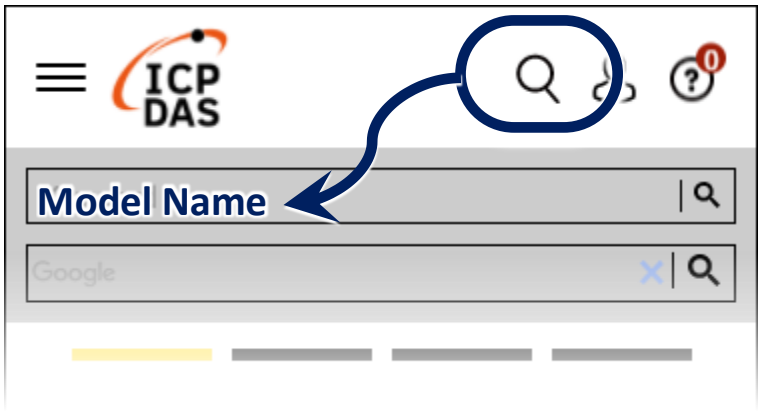


- For Desktop Web



Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

LED Indicators

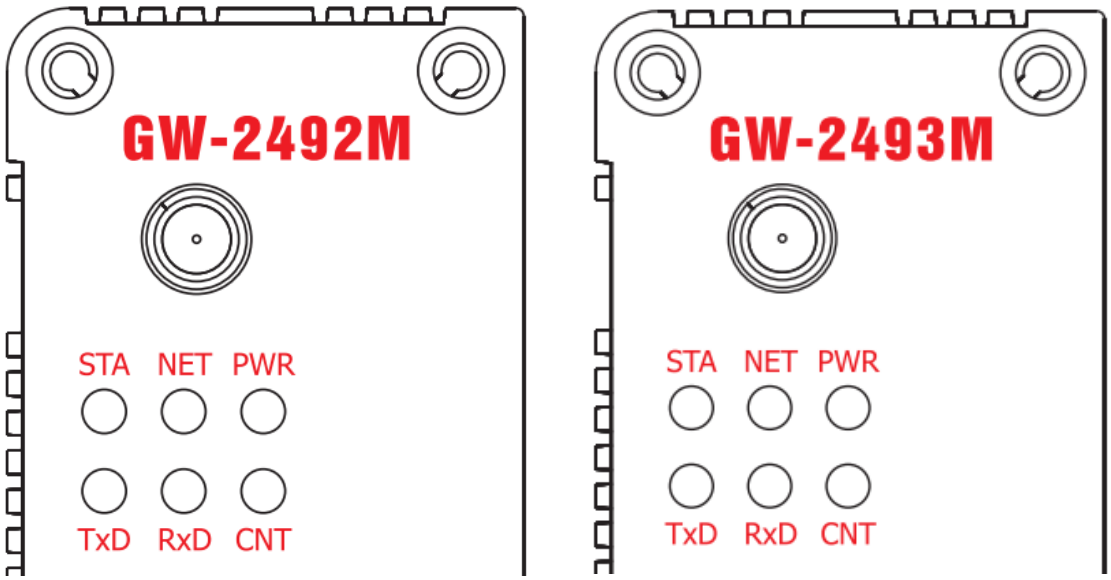

LED Name	GW-2492M/GW-2493M Status	LED Status
ALL LEDs	FW Updating Mode	LED will be twinkled sequentially.
	FW Initial Mode	LED will be twinkled per 500ms.
PWR (Module)	Power On	On
	Power Failure	Off
NET (BACnet/IP)	Connected by least one client	On
	No clients connect	Blink per 200 ms
STA (BACnet/IP)	Communication OK	On
	Communication Failure	Blink per 200 ms
CNT (Modbus)	Connect to least one device	On
	No devices are connected	Blink per 200 ms
RxD (Modbus)	Data reception	On
	No Data reception	Off
TxD (Modbus)	Data transmission	On
	No Data reception	Off

Network Connection

GW-2492M/GW-2493M Factory Defaults & Initial Mode			
Network	IP	192.168.255.1	Please follow your case to modify the network settings.
	Mask	255.255.0.0	
	Gateway	192.168.0.1	

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000