NS-205A Quick Start

v1.2, Dec 2020

Packing List

In addition to this guide, the package includes the following items:



NS-205A

Technical Support


service@icpdas.com

www.icpdas.com

Resources

How to search for drivers, manuals and spec information on ICPDAS website.

- For Mobile Web

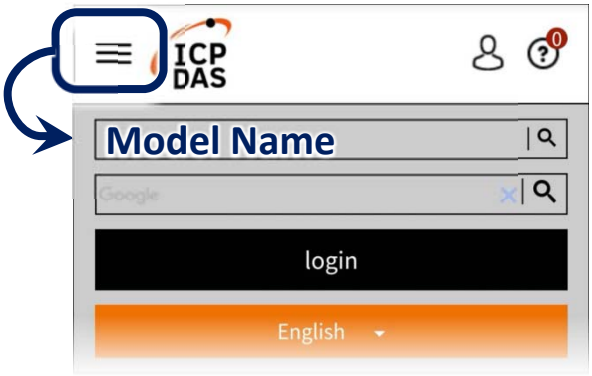

- For Desktop Web




Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

LED Indicator Functions

LED	Color	State	Description
PWR	Red	On	Power
		Off	Power is disconnect
Port1~5	Orange	On	Speed 100 Mbps
		Off	Speed 10 Mbps
	Green	On	Link/Act

Pin assignment


Pin	*Terminal*	*Function*
F.G		Frame Ground.
GND		Power Ground.
+VS		+12 ~ +56 VDC

Broadcast Storm protection：

NS-205A has BSP (Broadcast Storm Protection) Function , this Function can protect your Ethernet device disturbed from Broadcast ，If Switch detection Broadcast packet over 100 par second, Switch will drop the excess part to protect communication.

Note: BSP function will Enable/Disable after reset the power

Dimensions： *(Units:mm)*

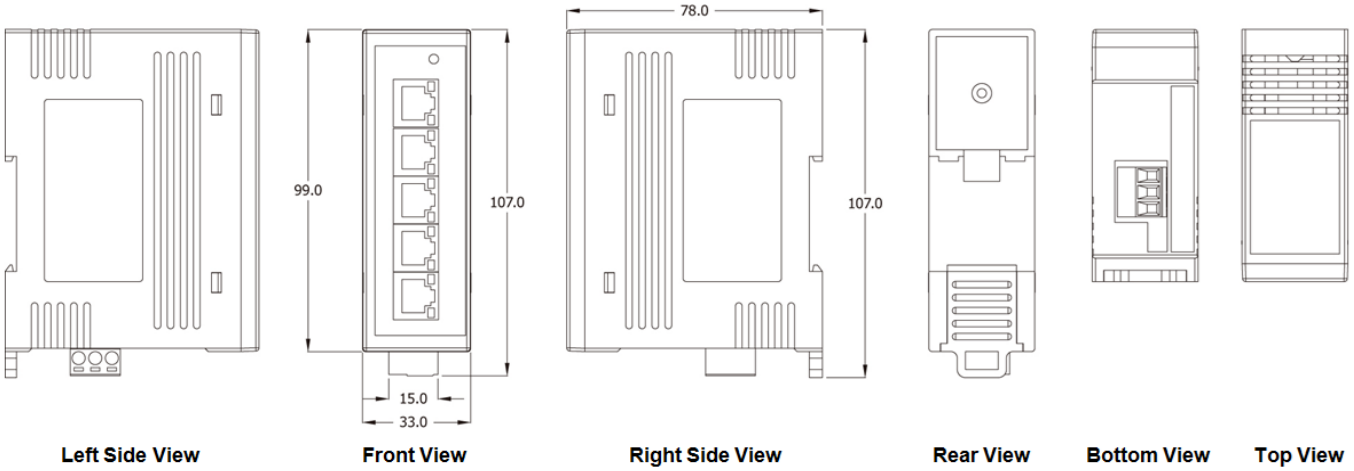

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000