PMC-2841M Quick Start

v1.0, April 2024

Packing List

In addition to this guide, the package includes the following items:



PMC-2841M



MicroSD card and Micro SD/SD adapter



Screw Driver 2.4mm (1C016)



Pin Terminal x 16

Technical Support


service@icpdas.com

www.icpdas.com

Resources

How to search for drivers, manuals and spec information on ICP DAS website.

- For Mobile Web

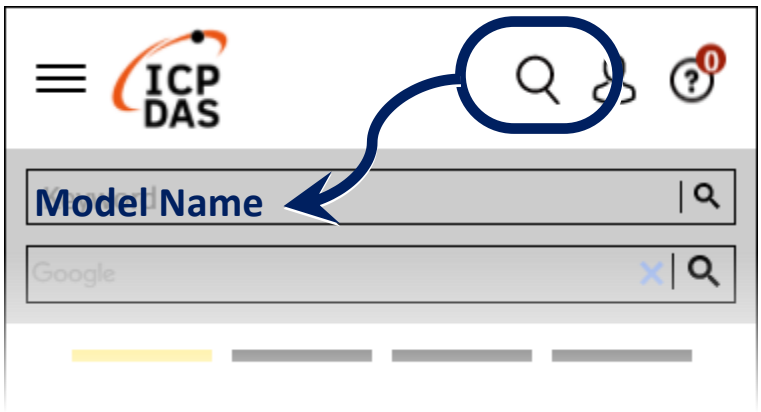


- For Desktop Web



Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000


1. Configuring the boot mode

Before starting PMC-2841M
at the first time, be sure that the
switch is placed in the “0” position.

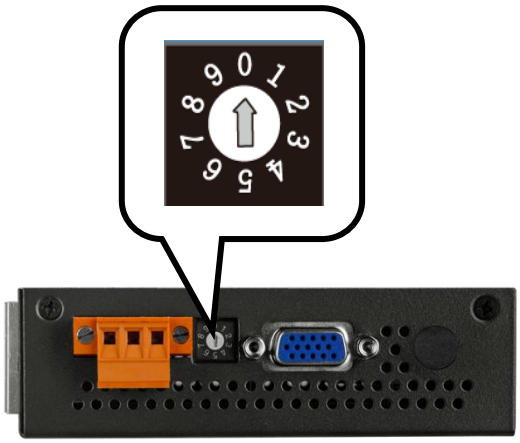

2. Checking the network setting


The PMC-2841M comes with the default IP setting:

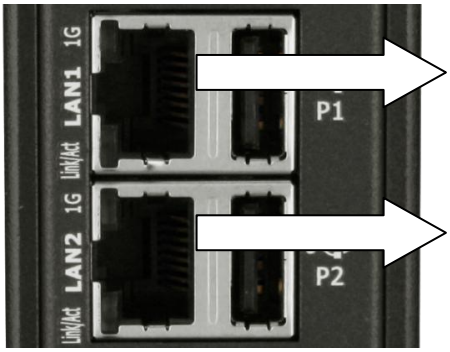


LAN1	Default
Network Setting	DHCP
LAN2	**Default**
IP	192.168.255.1
Mask	255.255.0.0
Gateway	192.168.0.1

3. Go to PMC-2841M's web site

- Open a browser, and type in the URL address of the PMC-2841M.

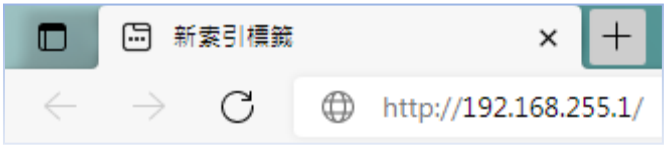

- You have to set the password before the first time to login.

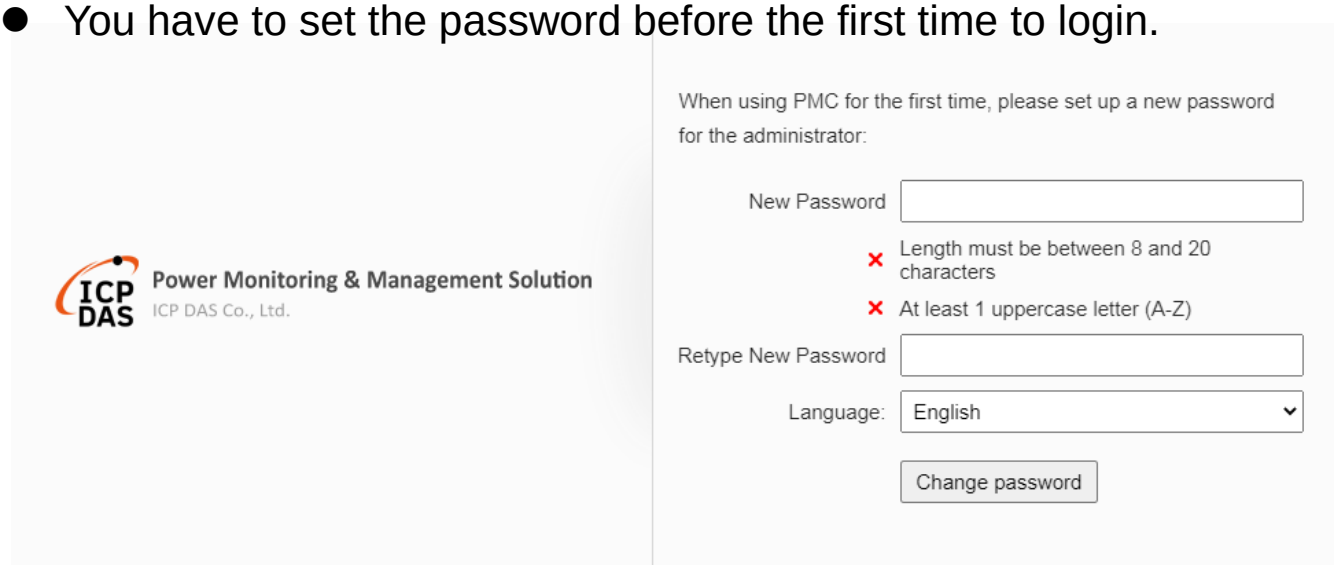

- For more detail information, please refer to PMC-2841M's User Manual.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000