WF-2060

Quick Start

「 WF-2060 」 Package Checklist




The package includes the following items:

- One WF-2060 module
- One Quick Start
- One software utility CD
- One screw driver
- One RS-232 cable (CA-0910)
- One Antenna 2.4GHz - 5 dBi (ANT-124-05)

Note:

1. If any of these items are missed or damaged, contact the local distributors for more information. Save the shipping materials and cartons in case you want to ship in the future.
2. This document supports the RevB version for the WF-2060 module. For the previous version, please refer the v1.x version quick start on the CD.

Appearance and pin assignments

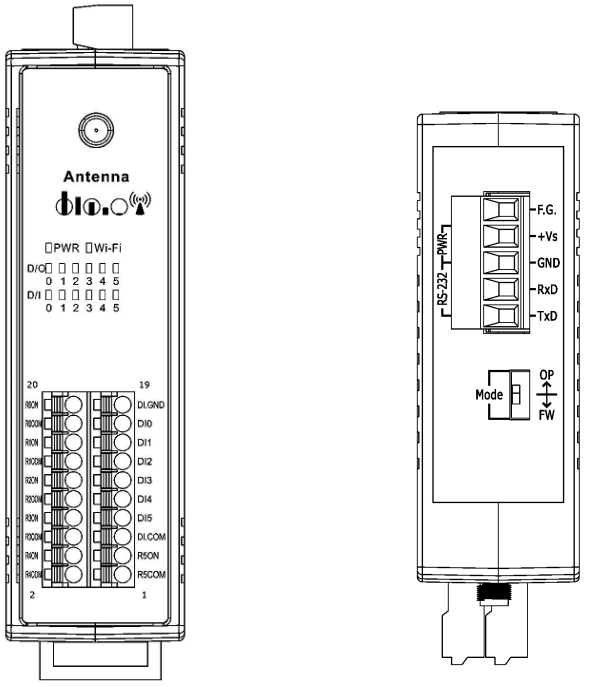

(Front View) (TOP View)

Figure 1: Appearance of the WF-2060

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Table 1: I/O Connector - WF-2060

I/O Connector - WF-2060			
Terminal No.	**Pin Assignment**	**Terminal No.**	**Pin Assignment**
1	RL5 COM	**2**	RL4 COM
3	RL5 NO	**4**	RL4 NO
5	DI.COM	**6**	RL3 COM
7	DI5	**8**	RL3 NO
9	DI4	**10**	RL2 COM
11	DI3	**12**	RL2 NO
13	DI2	**14**	RL1 COM
15	DI1	**16**	RL1 NO
17	DI0	**18**	RL0 COM
19	DI.GND	**20**	RL0 NO

Table 2: Operating Mode Selector Switch



Operating Mode Selector Switch		
Mode	**Jumper Position**	**Description**
FW		Firmware update mode
OP		Firmware operation mode

Table 3: Power/Signal Connector

Power/Signal connector	
Pin Assignment	**Description**
F.G	Frame Ground
+Vs	+10 ~ +30 VDC
GND	Power / RS-232 GND
RxD	RS-232 RxD
TxD	RS-232 TxD

● Hardware Connection

Power and Serial port connection

The following figures describe the Power and the COM port to a serial device via serial network.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

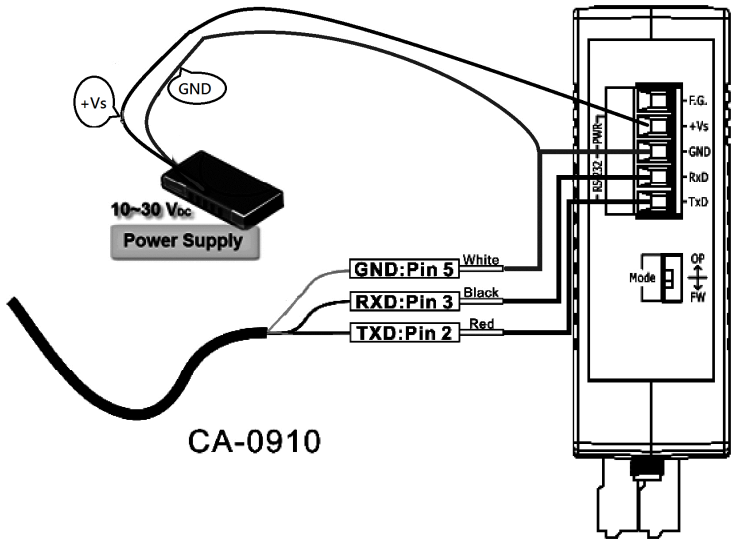


Figure 2**:** Power and Serial port wire connection

I/O connection

Input	ON	OFF
Relay Contact (Dry)	Relay Close — DIx / GND	Relay Open — DIx / GND
Open Collector (Dry)	ON — DIx / GND	OFF — DIx / GND
Relay Contact (Wet)	+ / − Relay Close — DI.COM / DIx	+ / − Relay Open — DI.COM / DIx
NPN Output (Wet)	− + ON — DI.COM / DIx	− + OFF — DI.COM / DIx

Output	ON	OFF
Relay	Load, AC/DC — RLx NO / RLx COM	Load, AC/DC × — RLx NO / RLx COM

Figure 3**:** DI / DO wire connection

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

● Installation

Before use, associated hardware configuration, the steps described as follows：

Step 1: Checking the WF-2000 series firmware operation mode

It needs to set the DIP switch to the "OP" position (operation mode), as resetting the power, WF-2000 series will be in the operation mode.

Step 2: Serial port connection

WF-2000 series supports RS-232 serial communication. The circuit configuration is as shown in Figure 2.

If you do not need parameter setting, this step can be omitted.

Step 3: Power connection

Connect the power supply to WF-2000 series' power terminator, as shown in Figure 2.

WF-2000 series connection setting

WF-2000 Series Connection Configuration

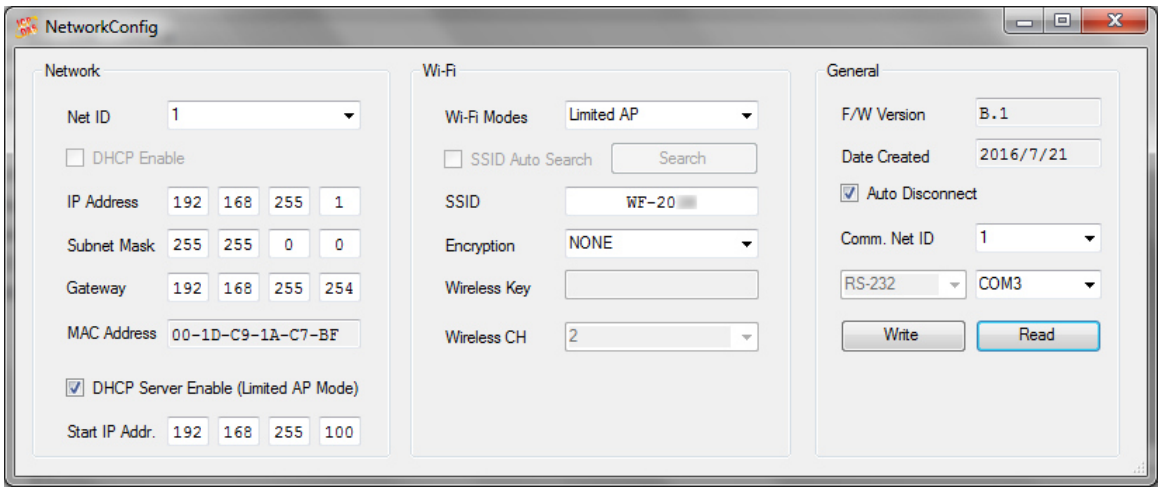


Figure 4: Connection Configuration

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

01、Net ID ：The Unit Identifier in Modbus TCP/IP application data unit. This case is set as "1".
02、IP Address: WF-2000 series' IP address. Here set to "192.168.255.1".
03、Subnet Mask ：Net Mask settings. Here set to "255.255.0.0".
04、Gateway ：Gateway settings. Here set to "192.168.255.254".
05、Wi-Fi Mode ：Wireless network connection mode settings. Here set to "Limited AP" mode. (If select the "Limited AP" mode, the "DHCP Server" function is enabled)
06、SSID ：Service set identifier. Here set to "WF-2060".
07、Encryption : Encryption mode settings. Here set "NONE" (without encryption).
08、Wireless Key ：Wireless encryption Key. Here does not have the setting.
09、Wireless CH ：Wi-Fi connection channel settings. Here set to "2".
10、Upload parameters : After completing the settings above, select the "RS-232" interface, communication "Net ID" and "COM Num". Press "Write" button to upload the parameters.

PC Wireless Network Configuration and Connection

01、TCP/IP Setting ：

a. Entry the **IP address** as "192.168.255.x", where "x" is a number between 1 and 254 **except 1**, **Subnet mask** as "255.255.255.0". Finally, press "OK" button.

02、Wireless network connection ：

a. View available wireless networks and you can see the "WF-2060" wireless network in the list.
b. Select the "WF-2060" and press the "Connect" button.
c. After waiting for a while, there will appear connection success screen.

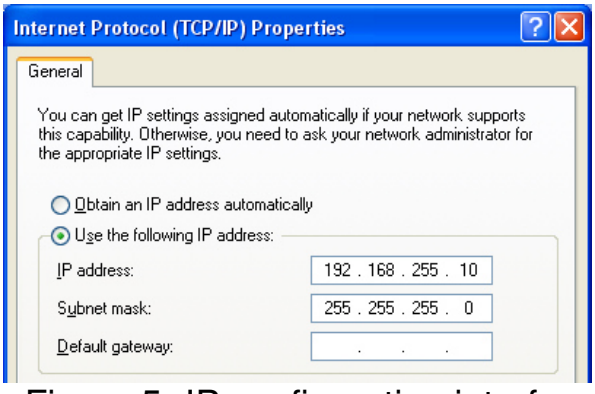


Figure 5: IP configuration interface

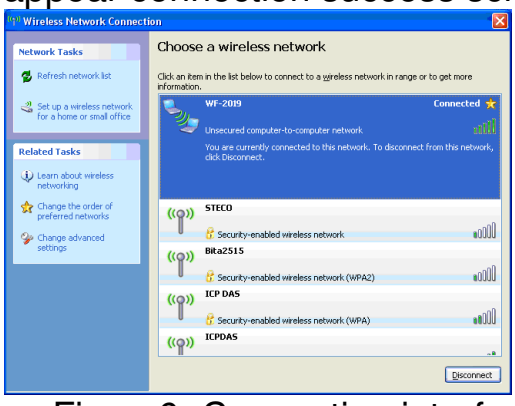


Figure6: Connection interface

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Access I/O data

01、Connection with Modbus TCP utility

a. Open Modbus TCP utility and key in the IP address as "192.168.255.1", Port as "502". Finally, press the "Connect" button.

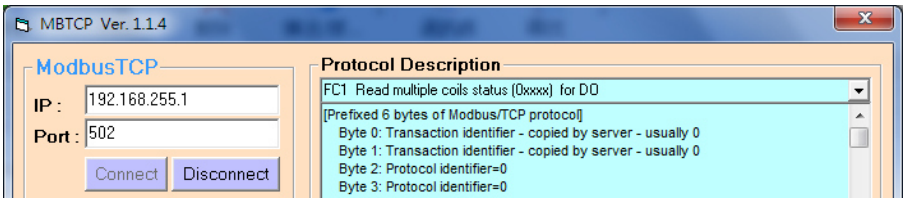


Figure7**:** Modbus TCP utility Connection interface

b. Use the function code "0x0F", and set the reference number as "0x00" to do the DO output control.

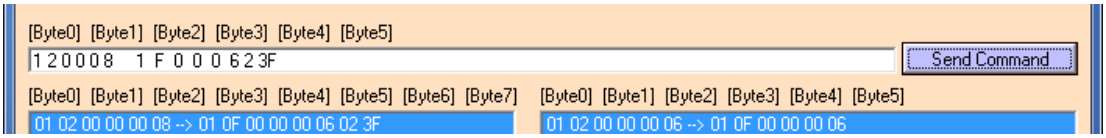


Figure 8**:** DO output control interface

c. Use the function code "0x01", and set the reference number as "0x00" to get the DO output monitor data.

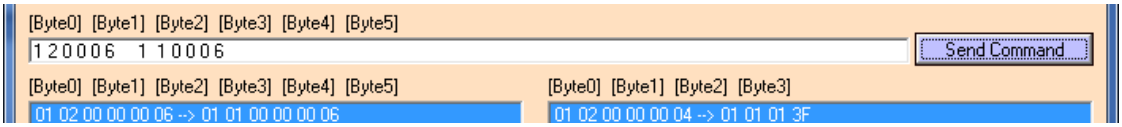


Figure 9**:** DO output monitor interface

d. Use the function code "0x02", and set the reference number as "0x00" to get the DI input monitor data.

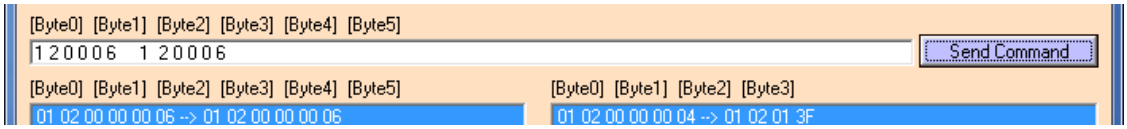


Figure 10**:** DI input monitor interface

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

e. Use the function code "0x04", and set the reference number as "0x32" to get the Counter monitor data.

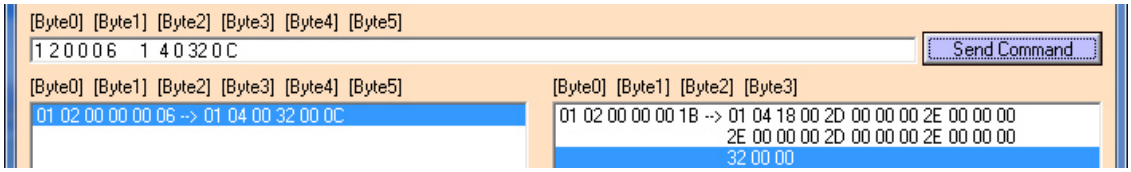


Figure 11: Counter monitor interface

Table 4: (0xxxx) DO address

Begin Address	Points	Descriptions	Range	Access Type
00001	1~6	Digital Output	0=OFF, 1=ON	R/W
00011	1~6	Clear High Speed Counter	1=Clear	W
00021	1~6	Clear Low Speed Counter	1=Clear	W

Table 5: (1xxxx) DI address

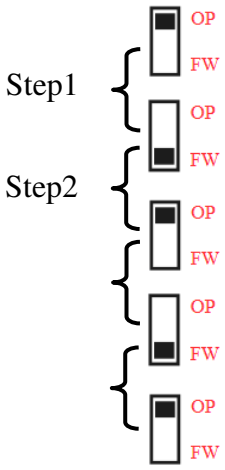
Begin Address	Points	Descriptions	Range	Access Type
10001	1~6	Digital Input	0=OFF, 1=ON	R

Table 6: (3xxxx) AI address

Begin Address	Points	Descriptions	Range	Access Type
30051	1~12 (2 points/ Each Channel)	High Speed Counter	0~4294967295	R
30071	1~12 (2 points/ Each Channel)	Low Speed Counter	0~4294967295	R

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Troubleshooting

Item	Problem Description	Solution
1	Power Failure (PWR LED Off)	1. Please return to the ICP DAS for inspection and repair
2	WLAN connection can not be established	1. Make sure that the service set identifier device (SSID) settings are the same. 2. Make sure Wi-Fi transmission Channel settings are the same. 3. Make sure encryption is set, encryption keys are the same way 4. Make sure antenna is connected 5. Please confirm whether there are barriers on the scene. That could result in poor signal quality.
3	TCP connection can not be established	1. Make sure WLAN connection is established successfully 2. Make sure the network configuration is good (TCP / IP Port, Local IP, Net Mask)
4	How to restore factory default  	1. Power on the WF-2000 series I/O module 2. Change the Dip-Switch position of the WF-2000 series and to complete the following steps in 5 seconds. Step1. From “OP” to “FW” position. Step2. From “FW” to “OP” position. Step3. From “OP” to “FW” position. Step4. From “FW” to “OP” position. 3. When the correct implementation of the above steps, the Signal Strength LEDs and PWR/Wi-Fi LEDS of the WF-2000 series should be turn on, and that should be turn off after 500 ms later. 4. Reset the power the WF-2000 series would back to factory defaults.

● Technical Support

If you have problems about using the WF-2000 series I/O module, please contact ICP DAS Product Support.

Email: service@icpdas.com

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000