# How to Add a PPPoE Dial-up Connection

*Applies to:*

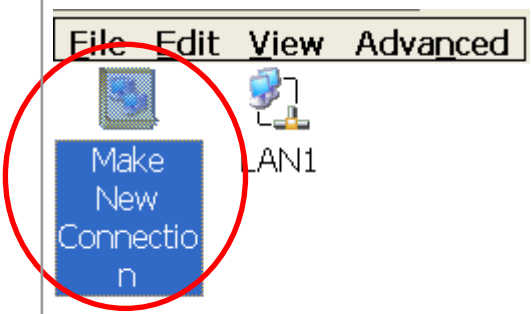
| ***Platform*** | ***OS version*** | ***WinPAC/ViewPAC utility version*** |
|---|---|---|
| *WP-8x4x* | *V1.7.0.1 and later* | *All versions* |
| *WP-8x3x* | *V1.6.0.0 and later* | |
| *WP-5000* | *V1.3.0.0 and later* | |
| *VP-25Wx* | *V2.3.0.0 and later* | |
| *VP-23Wx* | *V2.4.1.0 and later* | |
| *VP-413x* | *V2.4.1.0 and later* | |

The WinCE PAC supports PPPoE Dial-up connection. Please perform the follow steps:

Step 1: Click the Start menu -> Settings -> Control Panel, and then double-click the icon for "Network and Dial-up connections" in the control panel.



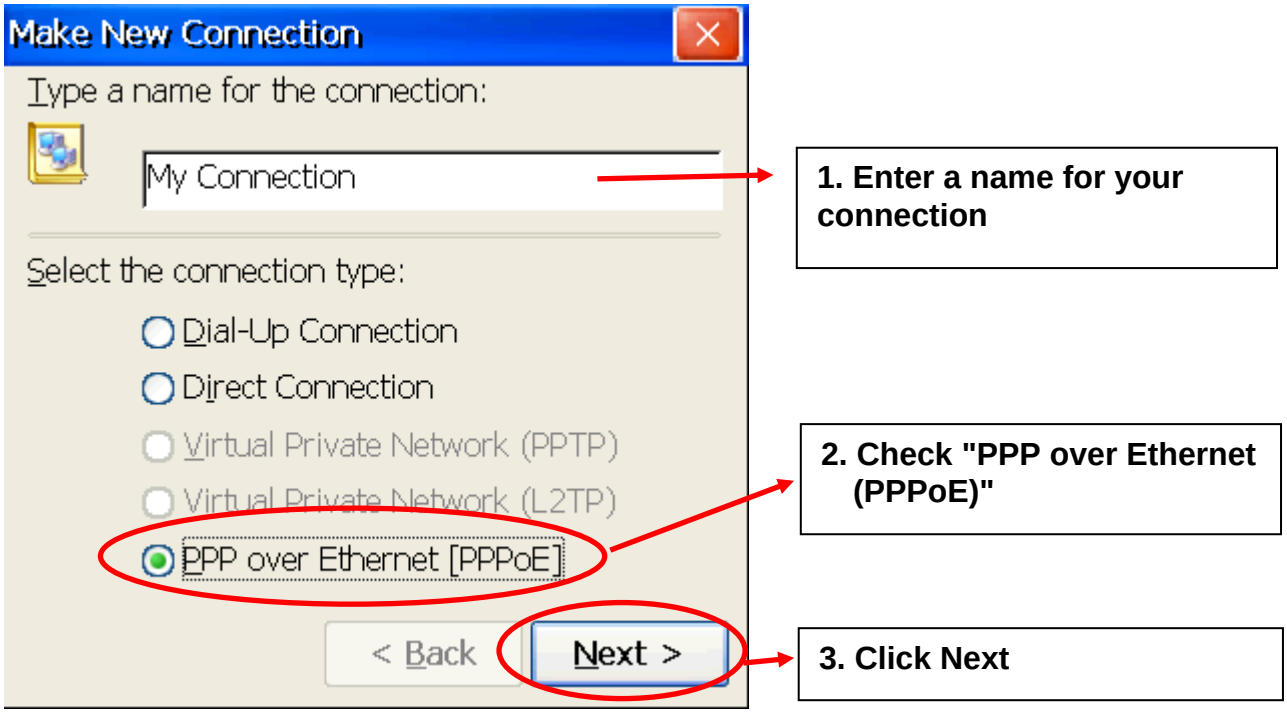

Step 2: Double-click the icon for "Make New Connection".



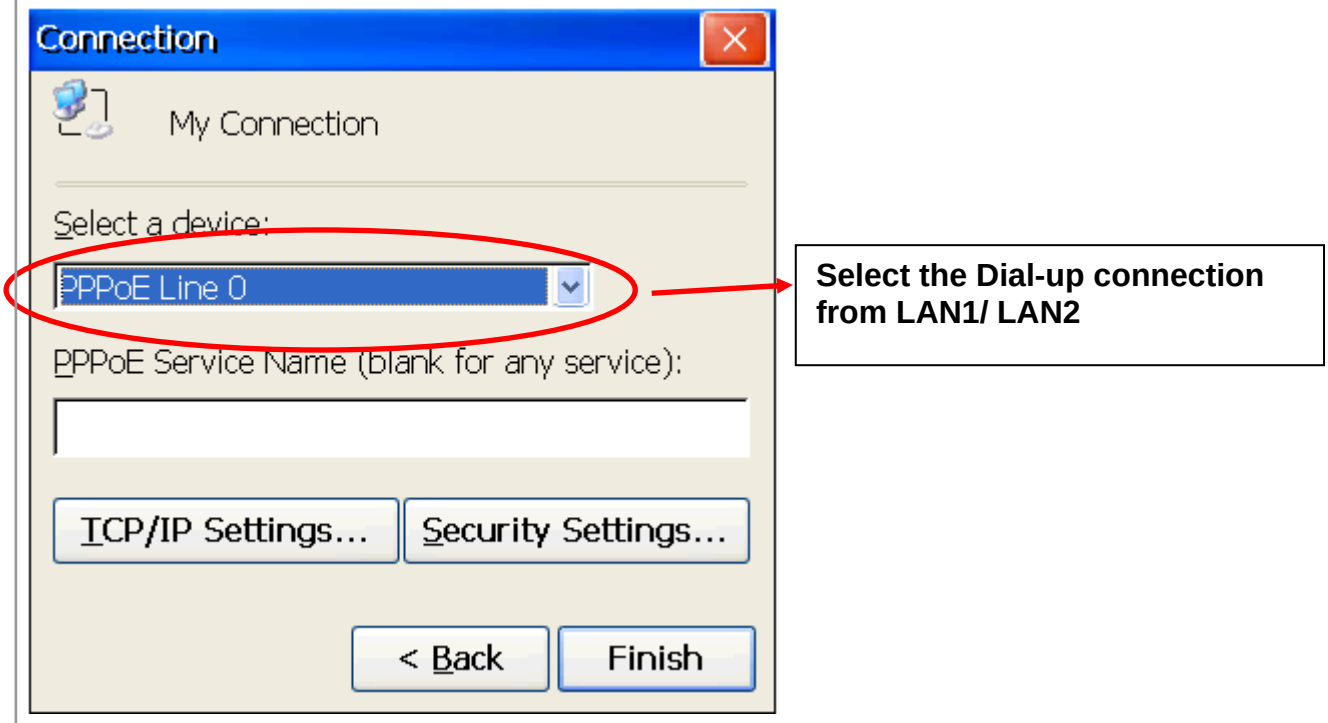



Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Step 3: In the "Make New Connection" dialog box, enter a name for the connection, select the "PPP over Ethernet (PPPoE)" option as the connection type, and then click the "Next" button.



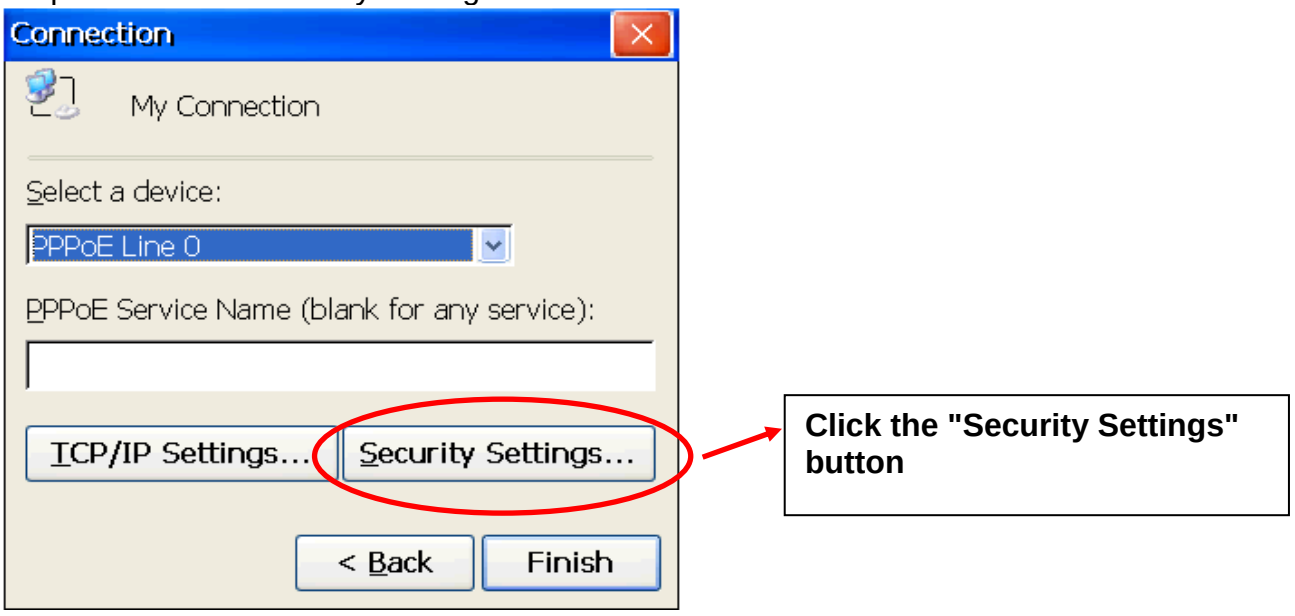

Step 4: In the "Select a device" drop-down menu, select the "**PPPoE Line 0**" option indicated as the dial-up connection from LAN1, select the "PPPoE Line 1" option indicated as the dial-up connection from LAN2.



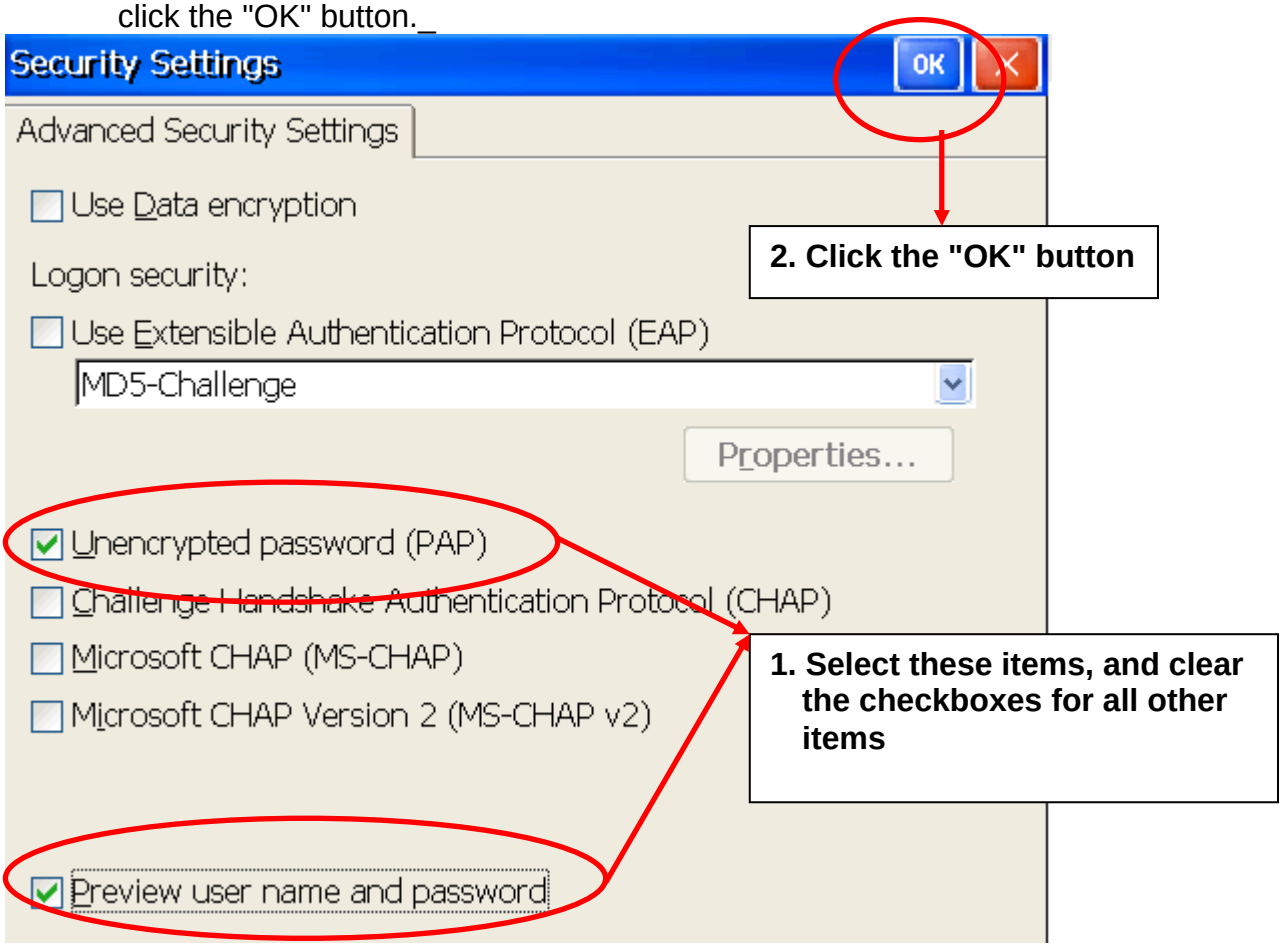



Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Step 5: Click the "Security Settings" button.



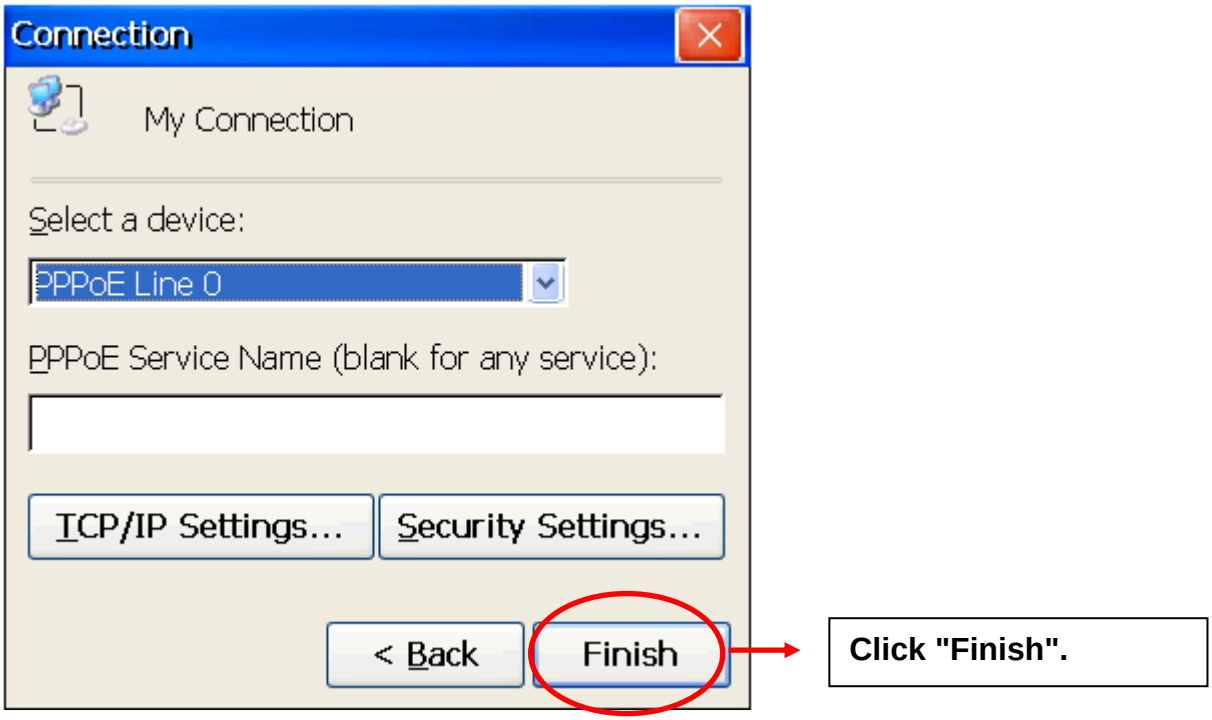

Step 6: In the "Security Settings" dialog box, check the "Unencrypted password (PAP)" and the "Preview user name and password" items, and clear checkboxes for all other items, then click the "OK" button._



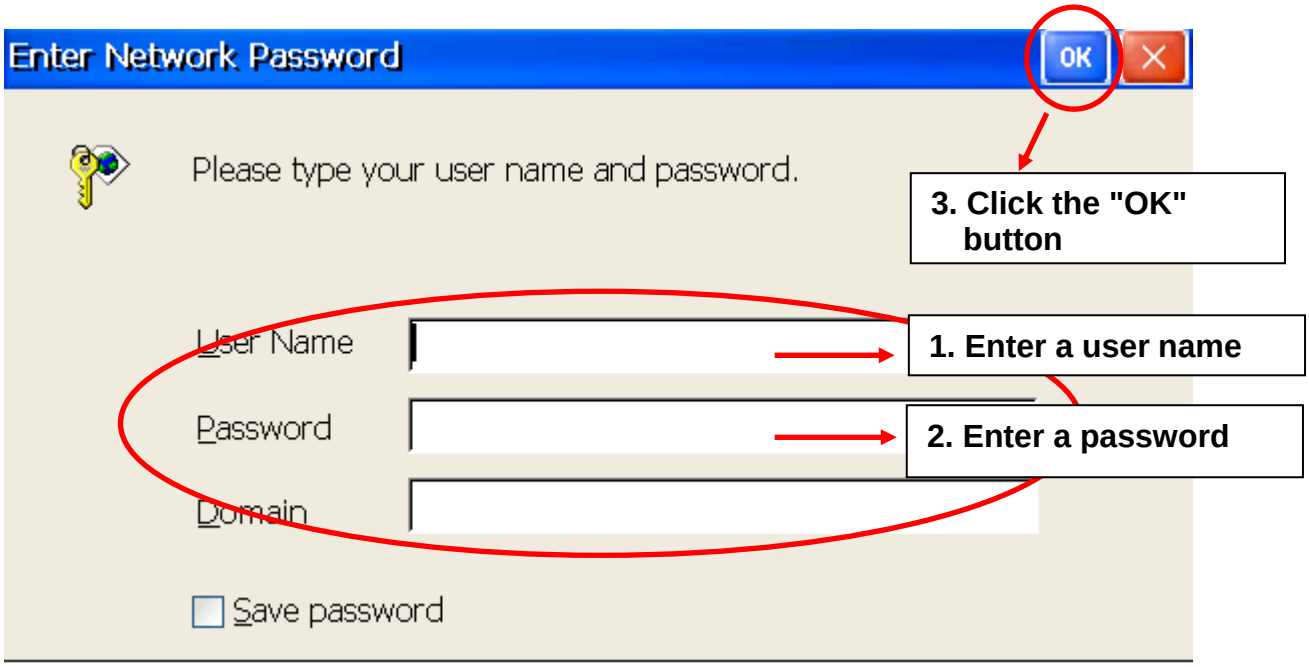



Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Step 7: Click the "Finish" button to save the settings and complete the creation of the new connection.



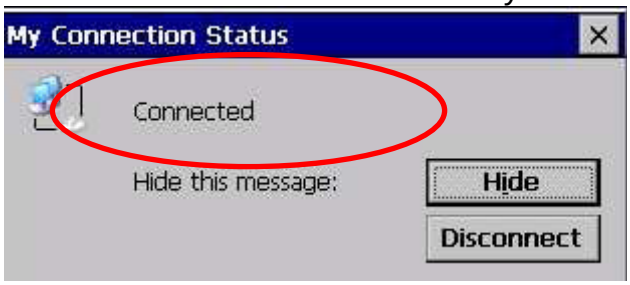

Step 8: In the Network settings window, double-click the icon for the new “PPPoE“ connection and then enter a user name and password in the login window. If you wish to save the password for future use, check the "Save password" checkbox. Click the "OK" button to establish a connection.






LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Step 9: A status window will be displayed with the message "Connected", indicating that the connection was success fully established.




## Revision History

| Revision | Date | Description |
|---|---|---|
| 1.0.0 | 2013/05/16 | Initial release |
| | | |
| | | |



LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000