iNS-306 Quick Start

v1.0, June 2021

Packing List

In addition to this guide, the package includes the following items:



iNS-306

Technical Support


service@icpdas.com

www.icpdas.com

Resources

How to search for drivers, manuals and spec information on ICP DAS website.

- For Mobile Web

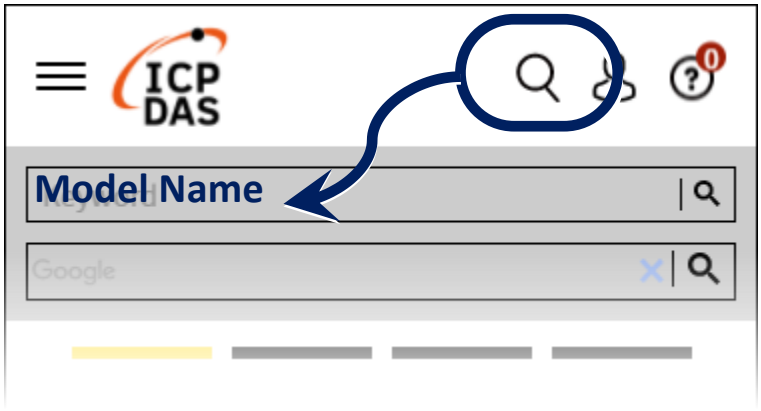

- For Desktop Web



Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000


1 Connecting the Power and Host PC

1) Make sure your PC has workable network settings.

Disable or well configure your Windows firewall and Anti-Virus firewall first, else the **Search Server** in section 3 may not work. (Please contact with your system Administrator)

2) Connect the iNS-306 to your PC or to the same sub network of PC.

3) Supply power (+12 ~ +57 V_{DC}) to the iNS-306.

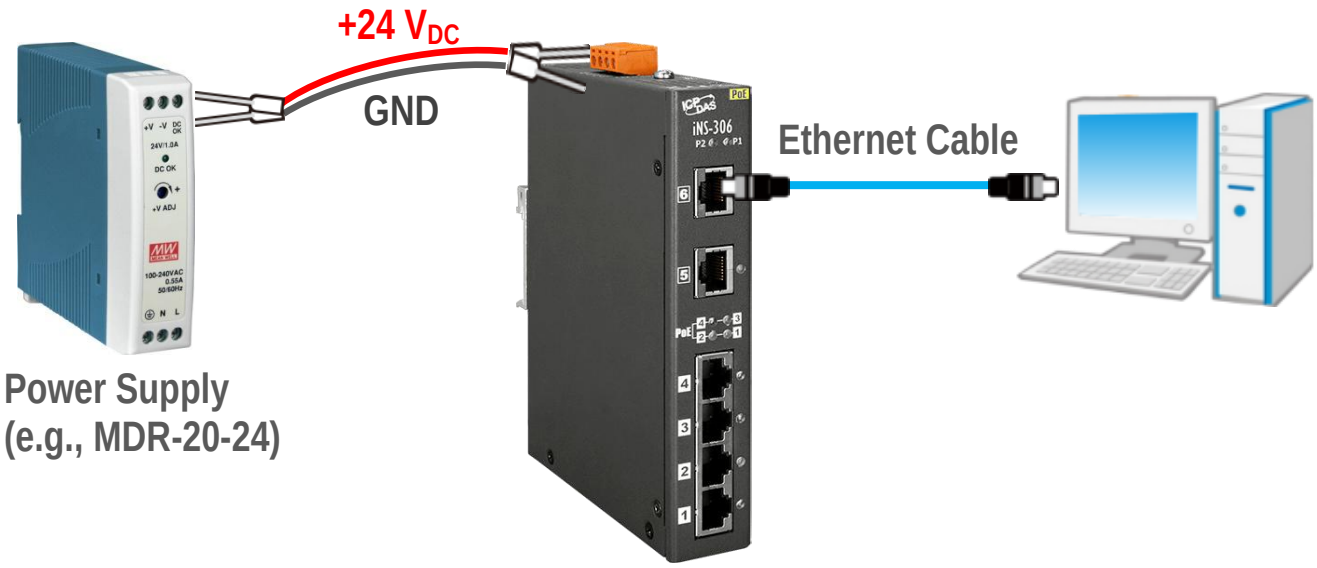

2 Installing Software on Your PC

Install eSearch Utility, which can be obtained from the web site:

https://www.icpdas.com/en/product/guide+Software+Utility_Driver+eSearch__Utility


Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

3 Configuring Network Settings

1) Double-click the eSearch Utility shortcut on the desktop.

2) Click **Search Server** to search your iNS-306.

3) Double-click the name of iNS-306 to open the **Configure Server (UDP)** dialog box.

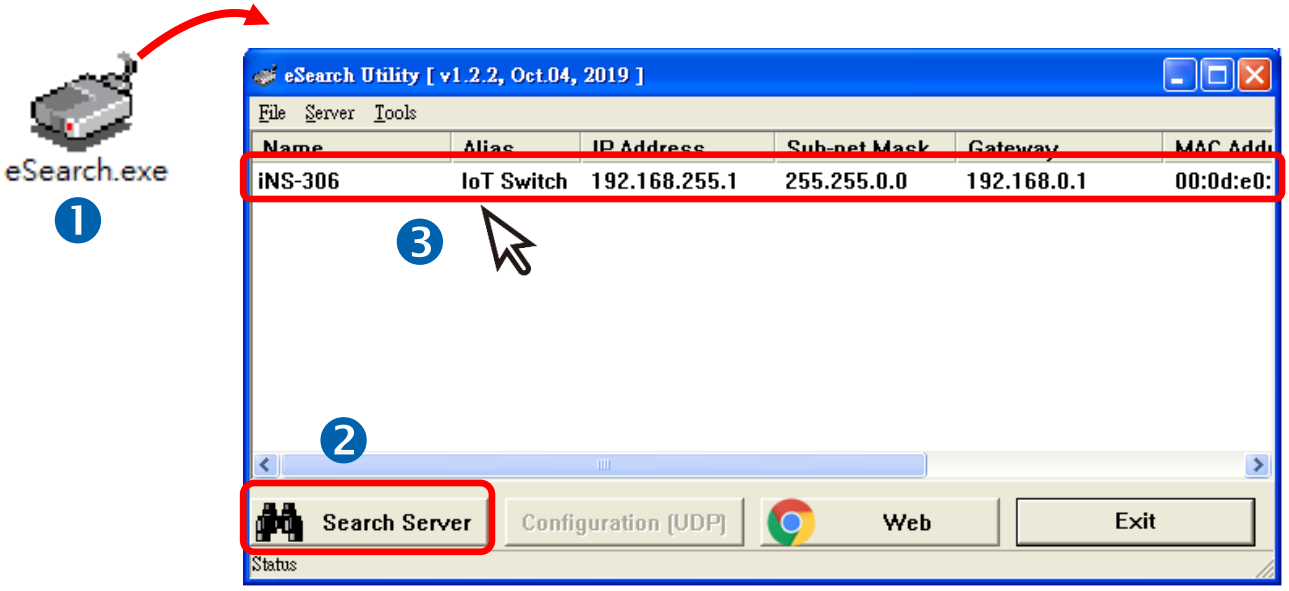


iNS-306 factory default network settings

IP Address	Subnet Mask	Gateway
192.168.255.1	255.255.0.0	192.168.0.1

4) Contact your network administrator to obtain a correct network configuration (such as IP/Mask/Gateway). Enter the new network settings and click **OK**.

⚠ Note: The iNS-306 will use the new settings 2 seconds later.


Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

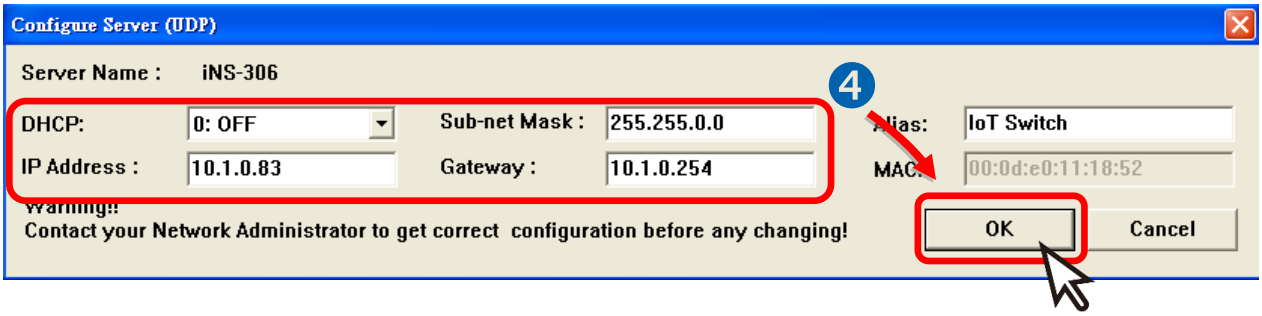

5) Wait 2 seconds and click **Search Server** again to ensure the iNS-306 is working well with new configuration.

6) Click the name of iNS-306 to select it.

7) Click the **Web** button to open the iNS-306 web interface.

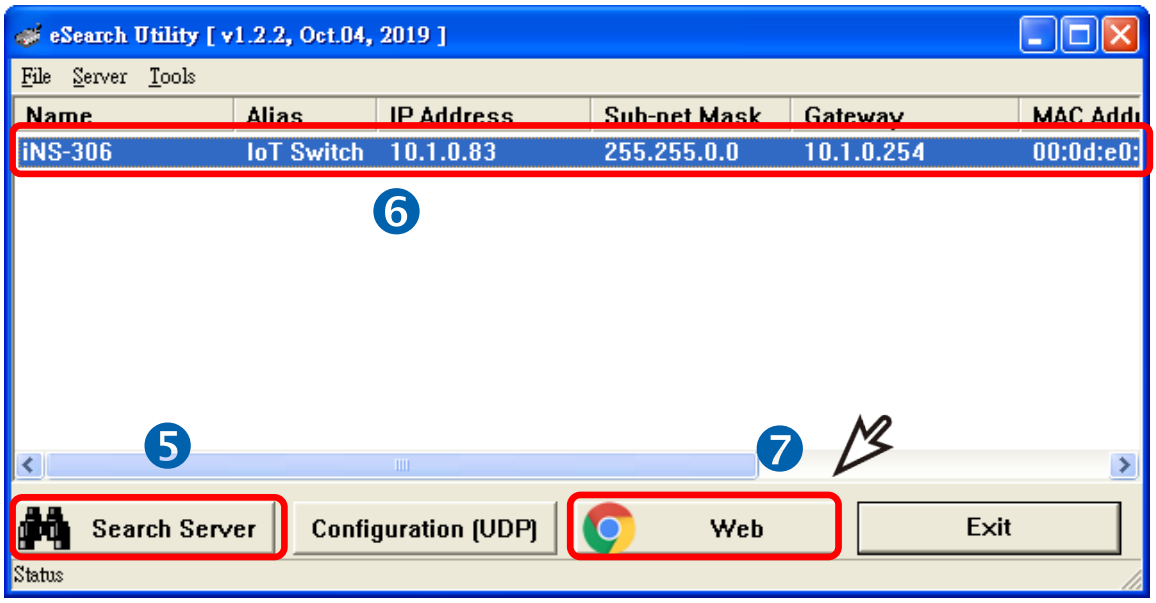

8) Enter password in the **Login password** input field and click **Submit** to log in to the iNS-306.



Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000