CAN-2060C/D Quick Start

V3.10, Mar 2025

Packing List

In addition to this guide, the package includes the following items:



CAN-2060C/D



Screw Driver

Technical Support

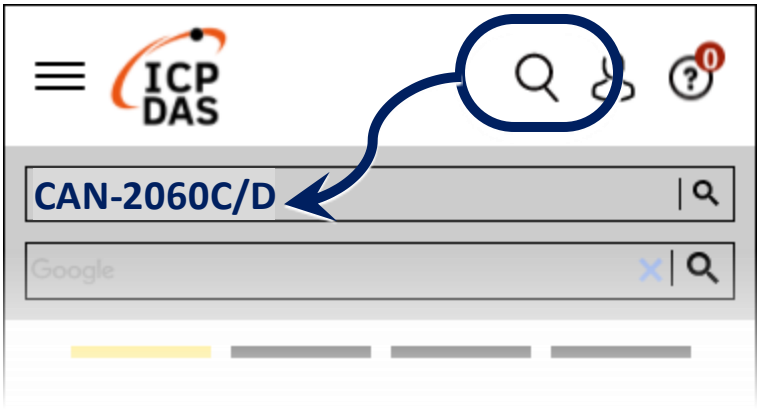
service@icpdas.com

www.icpdas.com

Resources

How to search for drivers, manuals and spec information on ICP DAS website.

- For Mobile Web




- For Desktop Web



Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

1 Node ID, baud rate and terminal resistance

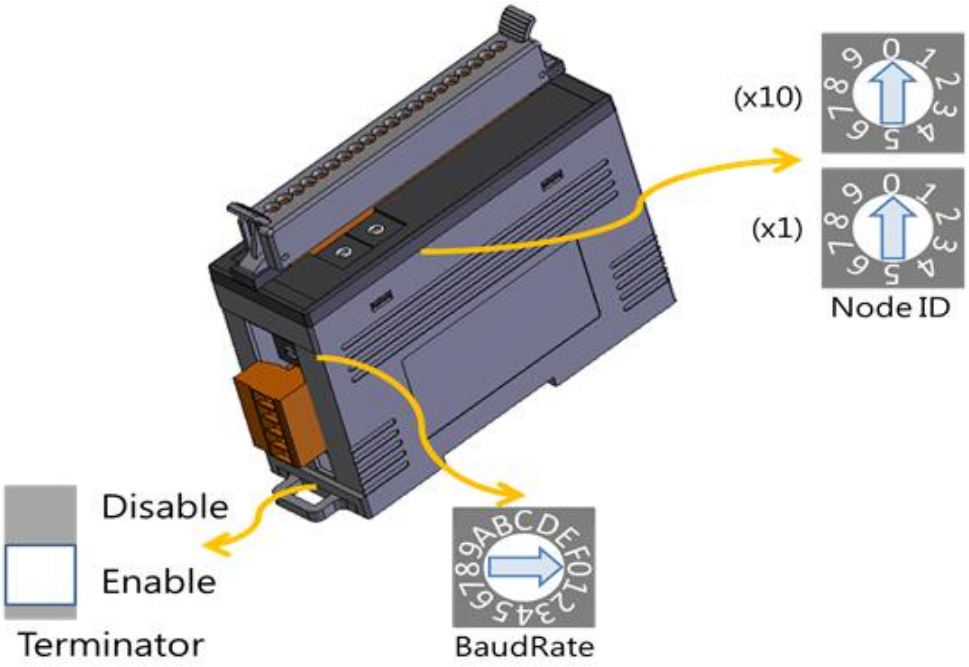According to the user's requirements for CANopen/DeviceNet network, set the node ID and CAN baud rate of this module on the CANopen/DeviceNet network. If the module is located at the terminal of the network, according to the standard CANopen/DeviceNet network specification, this module must enable the terminal resistance.



CAN-2060C







BaudRate Rotary Switch	BaudRate (k bps)
0	10
1	20
2	50
3	125
4	250
5	500
6	800
7	1000









CAN-2060D



BaudRate Rotary Switch	BaudRate (k bps)
0	125
1	250
2	500

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

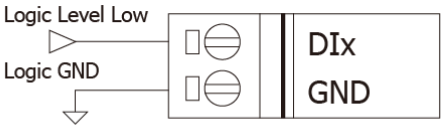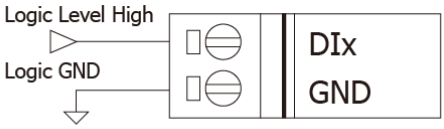2 I/O channel connection

Input Type Dry Contact	ON State LED ON	OFF State LED OFF
Relay Contact	Relay ON	Relay Off
		
TTL/CMOS Logic	Voltage < 1V	Voltage > 3.5V
		
Open Collector	Open Collector On	Open Collector Off
		

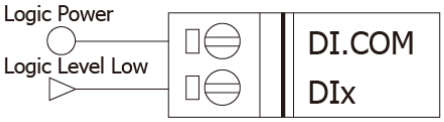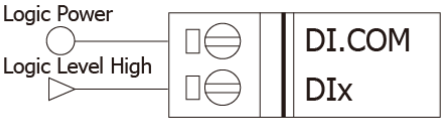
Input Type Dry Contact	ON State LED ON	OFF State LED OFF
Relay Contact	Relay ON	Relay Off
		
TTL/CMOS Logic	Voltage > 3.5V	Voltage < 1V
		
NPN Output	Open Collector On	Open Collector Off
		
PNP Output	Open Collector On	Open Collector Off
		

Output Type	ON State LED ON	OFF State LED OFF
Relay	Relay ON	Relay Off
		


Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

3 CAN port connection

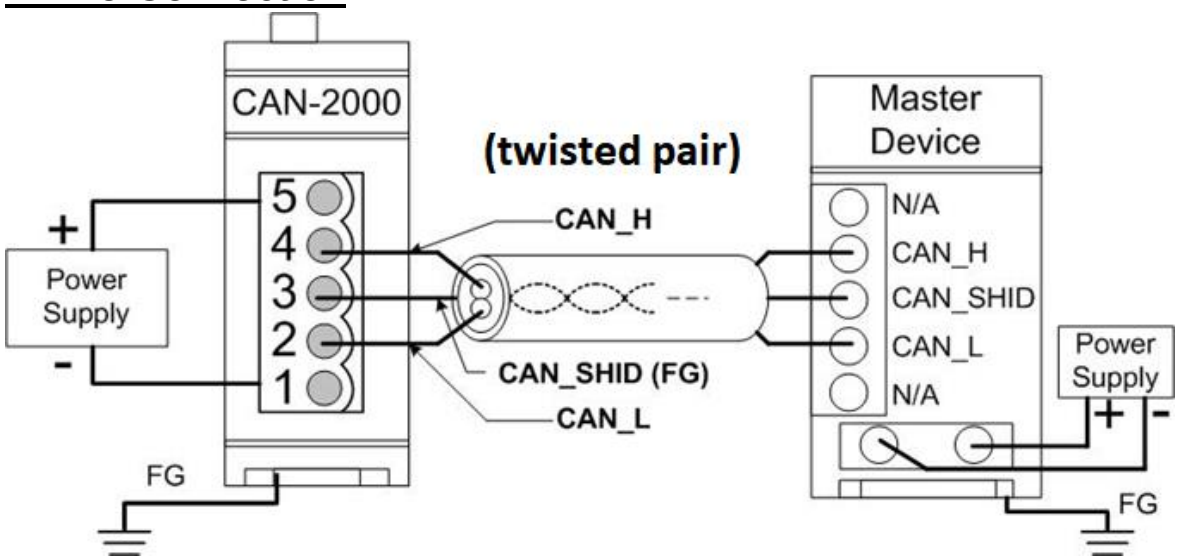
2-wire Connection



3-wire Connection

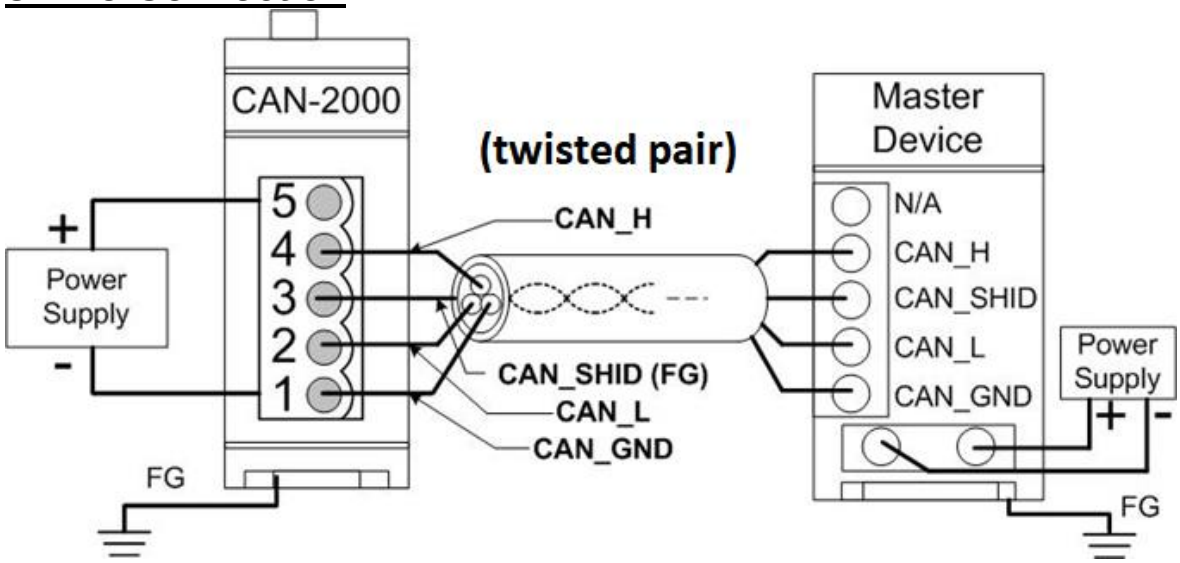

4-wire Connection

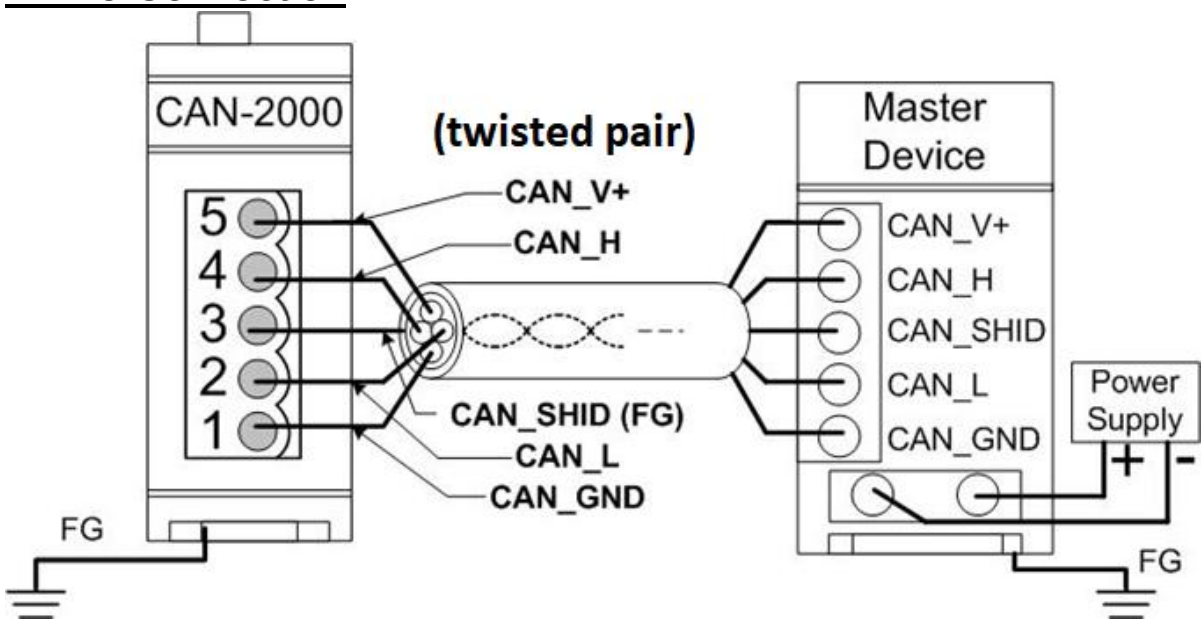

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000